


Service Manual

Plasma Television

Model No. TX-PR42G10

GPF12DE Chassis

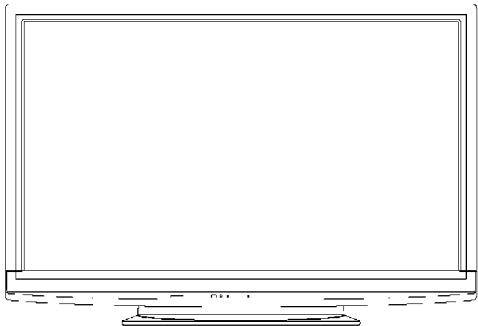

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by **⚠** in the Schematic Diagrams, Circuit Board Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

Panasonic®

© Panasonic Corporation 2009.
Unauthorized copying and distribution is a violation
of law.

1 Safety Precautions

1.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.
4. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
5. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
6. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

1.2. Touch-Current Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use Leakage Current Tester (Simpson 228 or equivalent) to measure the potential across the measuring network.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
6. The potential at any point (TOUGH CURRENT) expressed as voltage U_1 and U_2 , does not exceed the following values:

For a. c.: $U_1 = 35 \text{ V (peak)}$ and $U_2 = 0.35 \text{ V (peak)}$;

For d. c.: $U_1 = 1.0 \text{ V}$,


Note:

The limit value of $U_2 = 0.35 \text{ V (peak)}$ for a. c. and $U_1 = 1.0 \text{ V}$ for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

The limit value $U_1 = 35 \text{ V (peak)}$ for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz.

7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

Measuring network for TOUCH CURRENTS

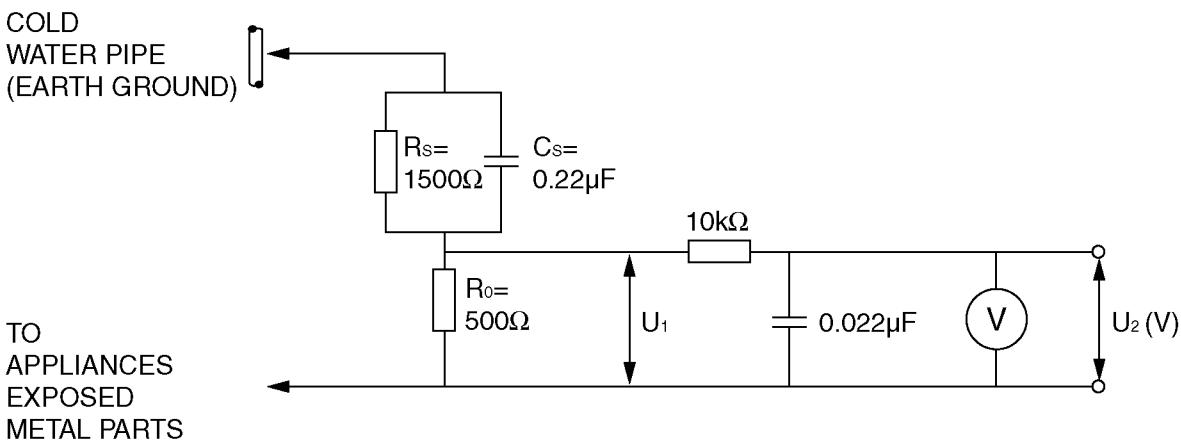

Resistance values in ohms (Ω)

V: Voltmeter or oscilloscope
(r.m.s. or peak reading)

Input resistance: $\geq 1 \text{ M}\Omega$

Input capacitance: $\leq 200 \text{ pF}$

Frequency range: 15 Hz to 1 MHz and d.c. respectively

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

Figure 1

2 Warning

2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor [chip] components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as [anti-static (ESD protected)] can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise ham less motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

2.2. About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).


That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf symbol PbF stamped on the back of PCB.

Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C). If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

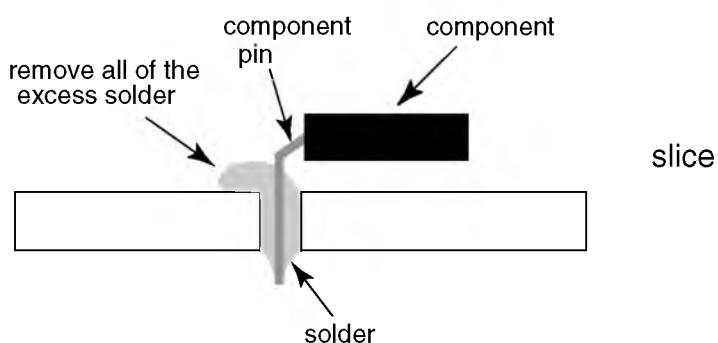

Suggested Pb free solder


There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

0.3mm X 100g	0.6mm X 100g	1.0mm X 100g


3 Service Navigation

3.1. Service Hint

Remove the Rear cover

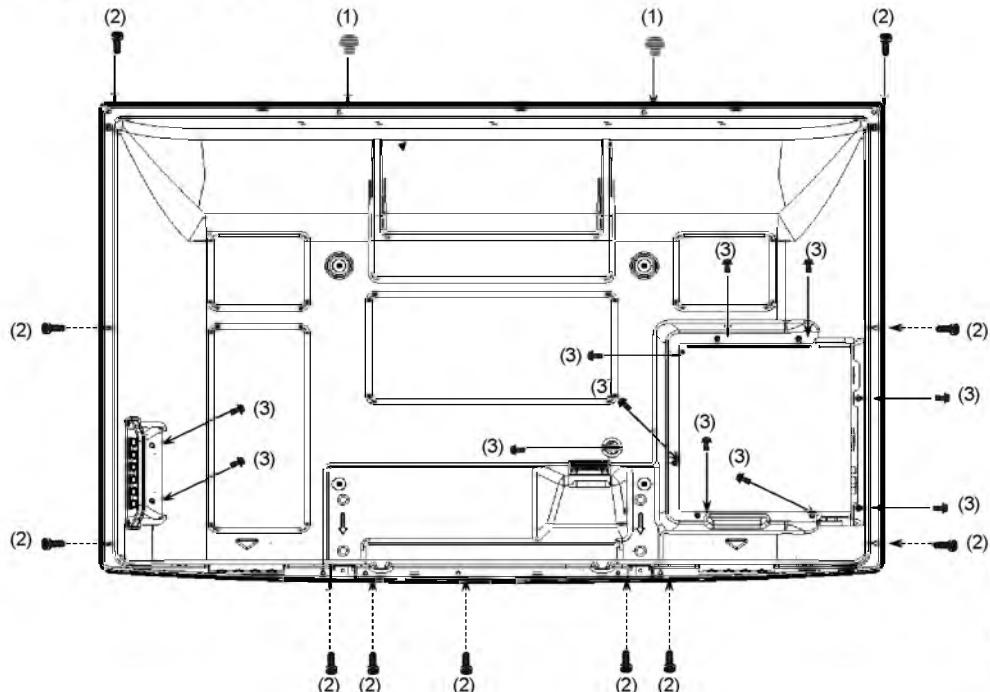

Remove:
2screws (1) THEL052Z
11screws (2) XTB4+12GFJK
11screws (3) THEL0429

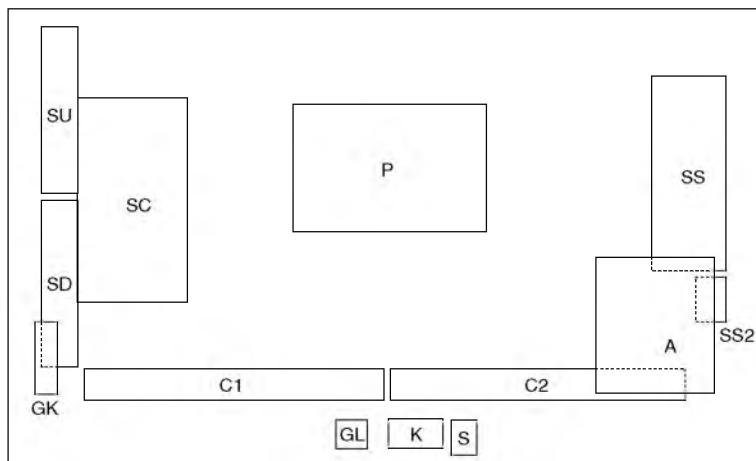

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Lower Right)
A	DC-DC Converter, Tuner Speaker out, AV Terminal, AV Switch, PC Digital Signal Processor, SYSTEM MPU, HDMI Switch Peaks-AVC, Ethernet Format Converter, Plasma AI, Sub-Field Processor	C2	Data Driver (Lower Left)
SC	Scan Drive	SC	Scan Drive
SS	Sustain Drive	SS2	Sustain out (Lower)
SS2	Sustain out (Lower)	SU	Scan out (Upper) None serviceable. SU-Board should be exchanged for service.
GL	SD LED	SD	Scan out (Lower) None serviceable. SD-Board should be exchanged for service.
K	Remote receiver, Power LED, C.A.T.S. sensor		
S	Power Switch		
GK	Key Switch		

3.2. Applicable signals

COMPONENT (Y, PB, PR), HDMI

* Mark: Applicable input signal for Component (Y, PB, PR) and HDMI

Signal name	COMPONENT	HDMI
525 (480) / 60i	*	*
525 (480) / 60p	*	*
625 (576) / 50i	*	*
625 (576) / 50p	*	*
750 (720) / 60p	*	*
750 (720) / 50p	*	*
1,125 (1,080) / 60i	*	*
1,125 (1,080) / 50i	*	*
1,125 (1,080) / 60p		*
1,125 (1,080) / 50p		*
1,125 (1,080) / 24p		*

PC (from D-sub 15P)

Applicable input signal for PC is basically compatible to VESA standard timing.

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)
640 × 400 @70 Hz	31.47	70.07
640 × 480 @60 Hz	31.47	59.94
640 × 480 @75 Hz	37.50	75.00
800 × 600 @60 Hz	37.88	60.32
800 × 600 @75 Hz	46.88	75.00
800 × 600 @85 Hz	53.67	85.06
852 × 480 @60 Hz	31.44	59.89
1,024 × 768 @60 Hz	48.36	60.00
1,024 × 768 @70 Hz	56.48	70.07
1,024 × 768 @75 Hz	60.02	75.03
1,024 × 768 @85 Hz	68.68	85.00
1,280 × 768 @60 Hz	47.70	60.00
1,280 × 1,024 @60 Hz	63.98	60.02
1,366 × 768 @60 Hz	48.39	60.04
Macintosh13 inch (640 × 480)	35.00	66.67
Macintosh16 inch (832 × 624)	49.73	74.55
Macintosh21 inch (1,152 × 870)	68.68	75.06

PC (from HDMI terminal)

Applicable input signal for PC is basically compatible to HDMI standard timing.

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)
640 × 480 @60 Hz	31.47	60.00
750 (720) / 60p	45.00	60.00
1,125 (1,080) / 60p	67.50	60.00

Note

- Signals other than above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.
- PC signal is magnified or compressed for display, so that it may not be possible to show fine detail with sufficient clarity.


4 Specifications

Power Source	AC 220-240 V, 50 / 60 Hz
Power Consumption	445 W
Power Consumption in Standby condition	0.4 W
Display panel	
Aspect Ratio	16:9
Visible screen size	106 cm (diagonal) 921 mm (W) × 518 mm (H)
Number of pixels	2,073,600 (1,920 (W) × 1,080 (H)) [5,760 × 1,080 dots]
Sound	
Speaker	160 mm × 40 mm × 2 pcs, 6 Ω
Audio Output	20 W (10 W + 10 W), 10 % THD
Headphones	M3 (3.5 mm) stereo mini Jack × 1
PC signals	
VGA, SVGA, WVGA, XGA	
SXGA, WXGA (compressed)	
Horizontal scanning frequency	31 - 69 kHz
Vertical scanning frequency	59 - 86 Hz
Receiving Systems / Band name	
PAL B, G, H, I, SECAM B, G, SECAM L, L'	
VHF E2 - E12	VHF H1 - H2 (ITALY)
VHF A - H (ITALY)	
UHF E21 - E69	CATV (S01 - S05)
CATV S1 - S10 (M1 - M10)	CATV S11 - S20 (U1 - U10)
CATV S21 - S41 (Hyperband)	
PAL D, K, SECAM D, K	
VHF R1 - R2	VHF R3 - R5
VHF R6 - R12	UHF E21 - E69
PAL 525/60	Playback of NTSC tape from some PAL Video recorders (VCR)
M.NTSC	Playback from M. NTSC Video recorders (VCR)
NTSC (AV input only)	Playback from NTSC Video recorders (VCR)
	1TV signals may not be received in some areas.
Aerial - Rear	
Operating Conditions	
	Temperature: 0 °C - 35 °C
	Humidity: 20 % - 80 % RH (non-condensing)
Connection Terminals	
AV1 (Scart terminal)	21 Pin terminal (Audio/Video in, Audio/Video out, RGB in, Q-Link)
AV2 (Scart terminal)	21 Pin terminal (Audio/Video in, Audio/Video out, RGB in, S-Video in, Q-Link)
AV3	
VIDEO	RCA PIN Type × 1
S-VIDEO	Mini DIN 4-pin
AUDIO L - R	RCA PIN Type × 2
COMPONENT	
VIDEO	Y 1.0 V [p-p] (including synchronization)
AUDIO L - R	P _B , P _R ± 0.35 V [p-p]
Others	RCA PIN Type × 2 0.5 V [rms]
HDMI1 / 2 / 3	TYPE A Connectors HDMI™ (Version 1.3a with x.v.Colour™)
PC	1 This TV supports [HDAVI Control 4] function. HIGH-DENSITY D-SUB 15PIN R, G, B/ 0.7 V [p-p] (75 Ω) HD, VD/TTL Level 2.0 - 5.0 V [p-p] (high impedance)
Card slot	SD Card slot × 1
Output	
AUDIO L - R	RCA PIN Type × 2 0.5 V [rms] (high impedance)
DIGITAL AUDIO OUT	PCM / Dolby Digital, Fiber optic
Dimensions (W × H × D)	1,029 mm × 704 mm × 334 mm (With Pedestal) 1,029 mm × 661 mm × 105 mm (TV only)
Mass	28.0 kg Net (With Pedestal) 25.0 kg Net (TV only)
Note	
	• Design and Specifications are subject to change without notice. Mass and Dimensions shown are approximate.
	• Pedestal: ST-42CS3WG / ST-50CS3WG (For safety approval)

5 Service Mode

5.1. How to enter into Service Mode

While pressing [VOLUME (-)] button of the main unit, press [0] button of the remote control three times within 2 seconds.

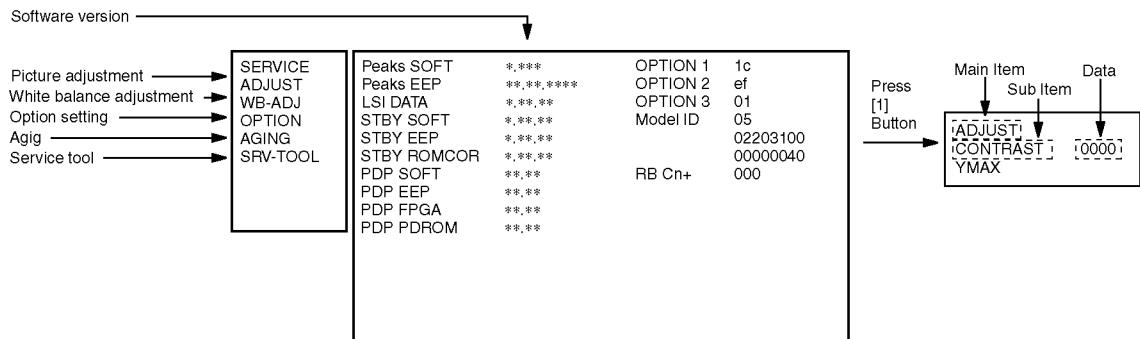

5.1.1. Key command

- [1] button...Main items Selection in forward direction
- [2] button...Main items Selection in reverse direction
- [3] button...Sub items Selection in forward direction
- [4] button...Sub items Selection in reverse direction
- [RED] button...All Sub items Selection in forward direction
- [GREEN] button...All Sub items Selection in reverse direction
- [VOL] button...Value of sub items change in forward direction (+), in reverse direction (-)

5.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample data	Remark
ADJUST	CONTRAST	000	
	COLOR	2B	
	TINT	00	
	SUB-BRT	80C	
	H-POS	0	
	H-AMP	0	
	V-POS	0	
	V-AMP	0	
WB-ADJ	R-CUT	80	
	G-CUT	80	
	B-CUT	80	
	R-DRV	DD	
	G-DRV	FC	
	B-DRV	D5	
	ALL-CUT	80	
	ALL-DRV	FC	
OPTION	Panel-Type	42FHD	Factory Preset
	Boot	ROM	
	STBY-SET	00	
	EMERGENCY	ON	
	Y/C Delay		
	OPT 1	00011100	
	OPT 2	11101111	
	OPT 3	00000001	
AGING	RGBW		
	Vertical line		
	All white (COUNTER)		
	All white		
	All red		
	All green		
	All blue		
	ON/OFF		
	Diagonal lamp W		
	Diagonal lamp R		
	Diagonal lamp G		
	Diagonal lamp B		
	1% WINDOW		
	COLOR BAR		
	A B zone/checkerd 4 trio		
	SCROLL BAR		
	2dot width border		
	Low setup red		
	Low setup green		
	Low setup blue		
SRV-TOOL			see next

Destinations	TX-PR**G10
	Russia
Checksum	6644
EDID	e2 2b1b0b-

5.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

5.2. Service tool mode

5.2.1. How to access

1. Select [SRV-TOOL] in Service Mode.
2. Press [OK] button on the remote control.

SRV-TOOL		
Display of TD2Microcode version →	TD2Microcode:00500985	
Display of Flash ROM maker code →	Flash ROM : 1 - 227E	
Display of SOS History →	PTCT : 00 . 00 . 00 . 00 . 00	Time 00000:40 On/Off 0000022 ← POWER ON Time, On/Off Press [MUTE] button (3sec)

5.2.2. Display of SOS History

SOS History (Number of LED blinking) indication.

From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.
This indication will be cleared by [Self-check indication and forced to factory shipment setting].

5.2.3. POWER ON Time, On/Off

Note : To display Time, On/Off menu, highlight position, then press MUTE for 3sec.

Time : Cumulative power on time, indicated hour : minute by decimal

On/Off : Number of On/Off switching by decimal

Note : This indication will not be cleared by either of the self-checks or any other command.

5.2.4. Exit

1. Disconnect the AC cord from wall outlet or switch off the power with [Power] button on the main unit.

5.3. Hotel mode

1. Purpose

Restrict a function for hotels.

2. Access command to the Hotel mode setup menu

In order to display the Hotel mode setup menu, please enter the following command (**within 2 second**).
 [TV] : Vol. [Down] + [REMOTE] : AV (3 times)

Then, the Hotel mode setup menu is displayed.

Hotel Mode	
Hotel Mode	Off
Initial INPUT	Off
Intial POS	Off
Intial VOL Level	Off
Maximum Vol Level	63
Button Lock	Off
Remote Lock	Off
Select	
 EXIT	
 Change	
 RETURN	

3. To exit the Hotel mode setup menu

Disconnect AC power cord from wall outlet.

4. Explain the Hotel mode setup menu

item	Function
Hotel Mode	Select hotel mode ON/OFF
Initial INPUT	Select input signal modes. Set the input, when each time power is switched on. Selection : Off/RF/AV1/AV2/AV2S/AV3/AV3S/COMPONENT/ PC/HDMI1/HDMI2/HDMI3 • Off: give priority to a last memory. However, Euro model is compulsorily set to TV. • AVnS/AVnC: only Euro model selectable • PC: selectable with VGA option
Initial POS	Select programme number. Selection : Off/0 to 99 • Off: give priority to a last memory
Initial VOL level	Adjust the volume when each time power is switched on. Selection/Range : Off/0 to 63 • Off: give priority to a last memory
Maximum VOL level	Adjust maximum volume. Range : 0 to 63
Button lock	Select local key conditions. Selection : Off/SETUP/MENU/ALL • Off: altogether valid • SETUP: only F-key is invalid (Tuning guide(menu) can not be selected.) • MENU: only F-key is invalid (only Volume/Mute can be selected.) • ALL: altogether invalid.
Remote lock	Select remote control key conditions. Selection : Off/SETUP/MENU • Off: altogether valid • SETUP: only Setup menu is invalid • MENU: Picture/Sound/Setup menu are invalid

6 Troubleshooting Guide

Use the self-check function to test the unit.

1. Checking the IIC bus lines
 2. Power LED Blinking timing

6.1. Check of the IIC bus lines

6.1.1. How to access

Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [OK] button on the remote control for more than 3 seconds.

Self-check indication and forced to factory shipment setting:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [MENU] button on the remote control for more than 3 seconds.

6.1.2. Screen display

42FHD SET	Panasonic 2009PDP
SELF CHECK COMPLETE	
ADV	OK
ADAV	OK
TUN	OK
GENX	OK
MEN1	OK
MEN2	OK
AVSW	OK
PDP-PANEL	OK
TEMP	OK
VIF	OK
PEAKS-SOFT	*.**
PEAKS-EEP	***,***,****
GENX-SOFT	*.**,***
GENX-EEP	*.***,***
GENX-ROMCOR	*.**,***
PDP-MCU	*.*,***
PDP-EEP	*.*,***
PDP-FPGA	*.*,***
PDP-PDPOM	*.*,***
SUM	6648
Model ID	06
	02203100
	00000020
EDID	e2 2b1b0b--

6.1.3. Check Point

Confirm the following parts if NG was displayed.

Display	Ref. No.	Description	P.C.B.
ADV	IC4510	AD/HDMI	A-Board
ADAV	IC2106	Sound Processor	A-Board
TUN	TU8301	Tuner	A-Board
GENX	IC1100	GenX (STB MCU)	A-Board
MEM1	IC1101	EEPROM (GenX)	A-Board
MEM2	IC8601	EEPROM (Peaks)	A-Board
AVSW	IC3001	Audio/Video SW	A-Board
PDP-PANEL	IC9003	MICOM	A-Board
TEMP	IC4800	Temp Sensor	A-Board
VIF	TU8301	Tuner	A-Board

6.1.4. Exit

Disconnect the AC cord from wall outlet or switch off the power with [Power] button on the main unit.

6.2. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.


Blinking Times	Blinking timing	Contents	Check point
1	<p>Once → 3 sec → Light No Light</p>	No particular check point	-
		Panel Status	-
		STB 5V SENSE Time out	A-Board
2		15V SOS	A-Board
3		3.3V SOS	A-Board
4		Power SOS	P-Board
5		5V SOS	A-Board
6		Driver SOS1 (SC/SS Energy recovery circuit)	SU-Board SD-Board SC-Board SS-Board
7		Driver SOS2 (SC floating voltage area)	SU-Board SD-Board SC-Board
8		Driver SOS3 (SS FPC DET)	SS-Board SS2-Board
9		Communication Error between Panel-MPU and SYS-MPU	A-Board
10		Sub 5V SOS Main 3.3V SOS DTV 9V SOS Tuner Power SOS	A-Board
11		Fan SOS	A-Board
12		Sound SOS	A-Board
13		Communication Error with IC8001	A-Board

6.3. No Power


First check point

There are following 2 states of No Power indication by power LED.


1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 6.2.)

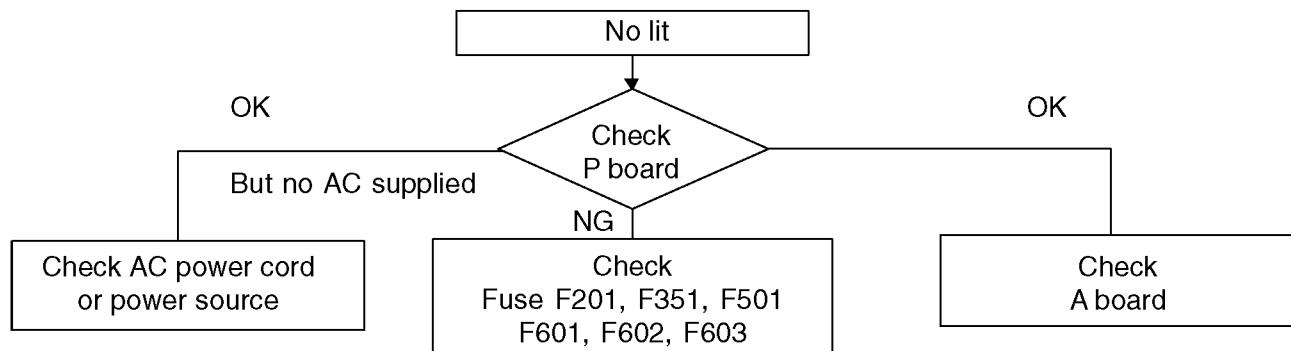

6.4. No Picture

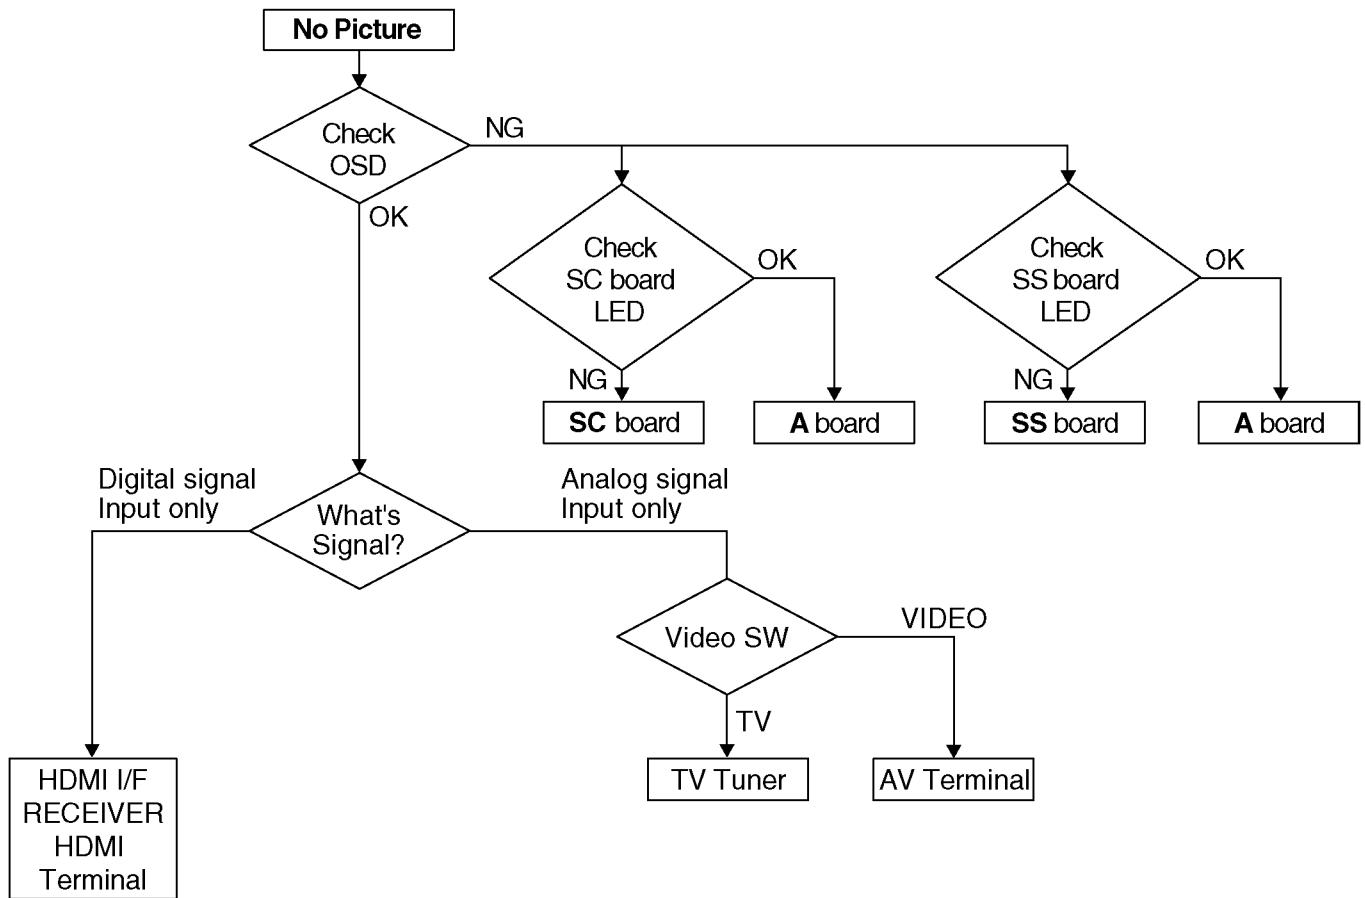

Drive circuits LED indicator

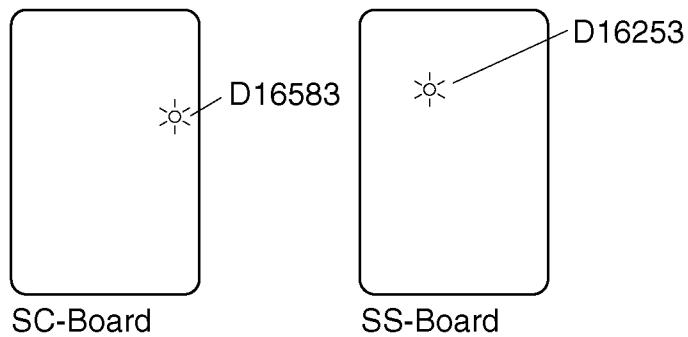

6.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

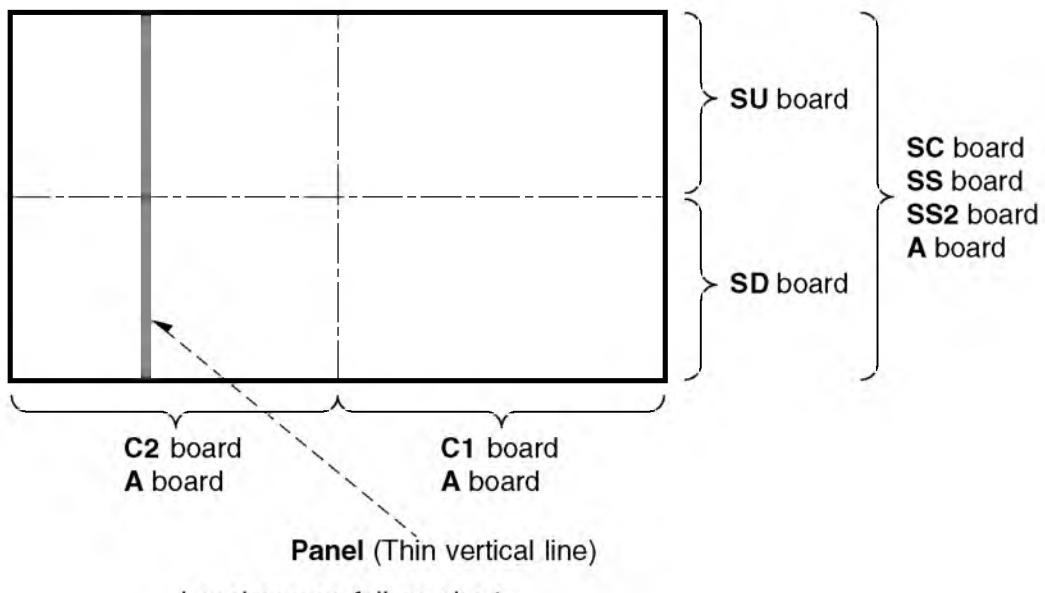


Fig-1


7 Disassembly and Assembly Instructions

7.1. Remove the Rear cover


1. See Service Hint (Section 3)

7.2. Remove the Fan

1. Unlock the cable clamps to free the cable.
2. Remove the screws ($\times 3 \rightarrow$).
3. Remove the relay connectors and remove the Fan unit.

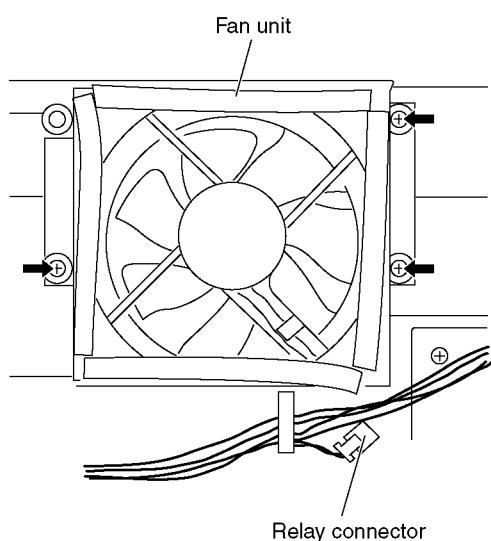

4. Remove the screw ($\times 1 \rightarrow$) on the back side.
5. Remove the Fan.

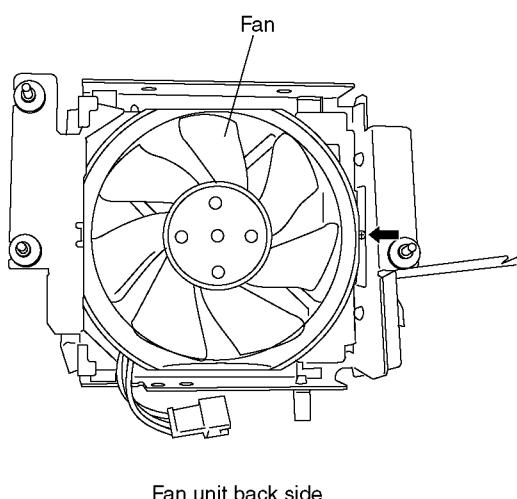


Fan unit back side

7.3. Remove the P-Board

Caution:


To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.

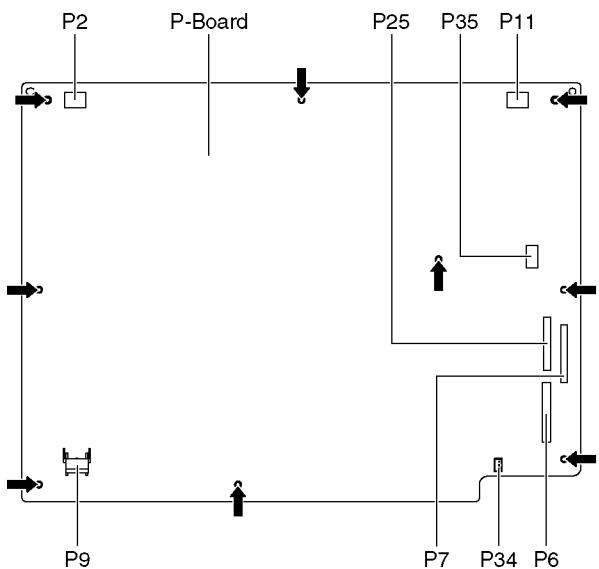


1. Unlock the cable clamps to free the cable
2. Disconnect the connectors (P2, P6, P7, P9, P11, P25, P34 and P35).
3. Remove the screws ($\times 9 \rightarrow$) and remove the P-Board.

7.4. Remove the Side terminal cover and Rear terminal cover

1. Remove the claw ($\times 1 \rightarrow$).
2. Remove the Side terminal cover.

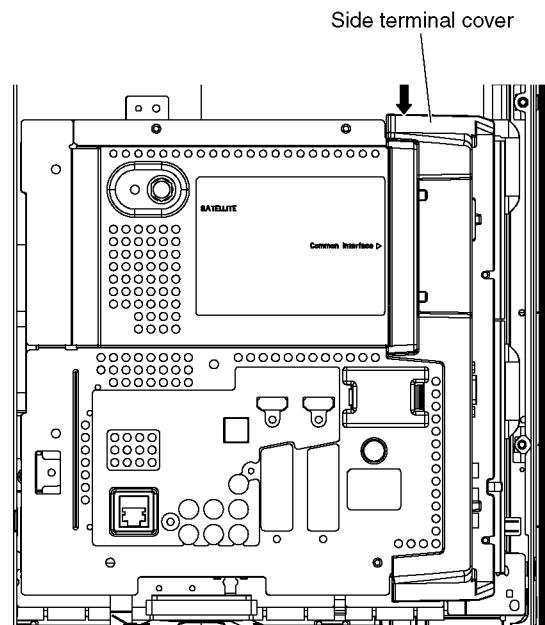


3. Remove the Adjustment cover.
4. Remove the screws ($\times 4 \rightarrow$, $\times 3 \rightarrow$, $\times 2 \rightarrow$).
5. Remove the Rear terminal cover.

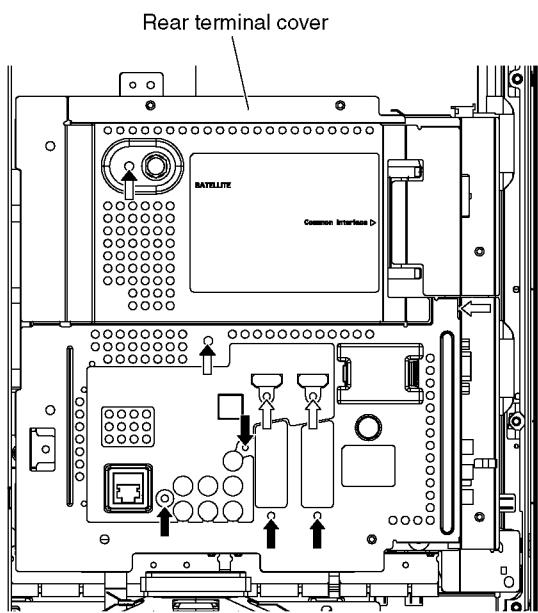

7.5. Remove the Tuner unit

1. Unlock the cable clamps to free the cable.
2. Disconnect the connectors (A1, A7, A8, A11, A12 and A25).
3. Disconnect the flexible cables (A20, A31, A32 and A88).
4. Remove the screws ($\times 2 \rightarrow$, $\times 1 \rightarrow$) and remove the Tuner unit.

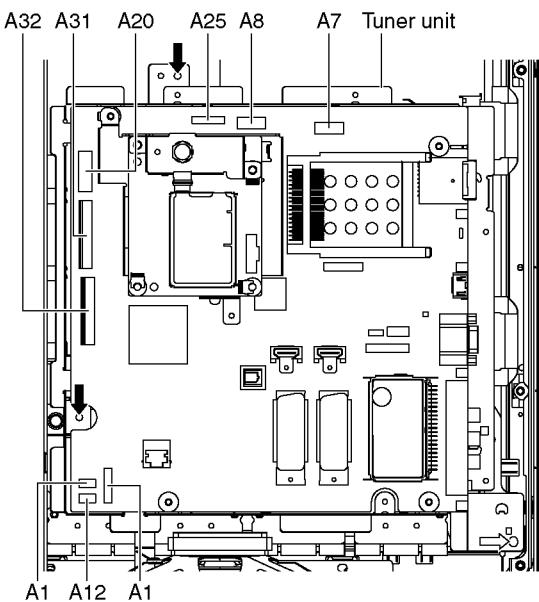


7.6. Remove the A-Board

1. Remove the Tuner unit. (See section 7.5.)
 2. Remove two EDGE SADDLES at top of case.
- Twist the EDGE SADDLE to press up at the back and pull down the front side.
3. Remove the screws ($\times 4 \rightarrow$) and remove the A-Board.

Caution :


Press up the case not to touch the leg of clamper to the A-board.

Pay attention two metal projection ○ from back side when removal and assemble.

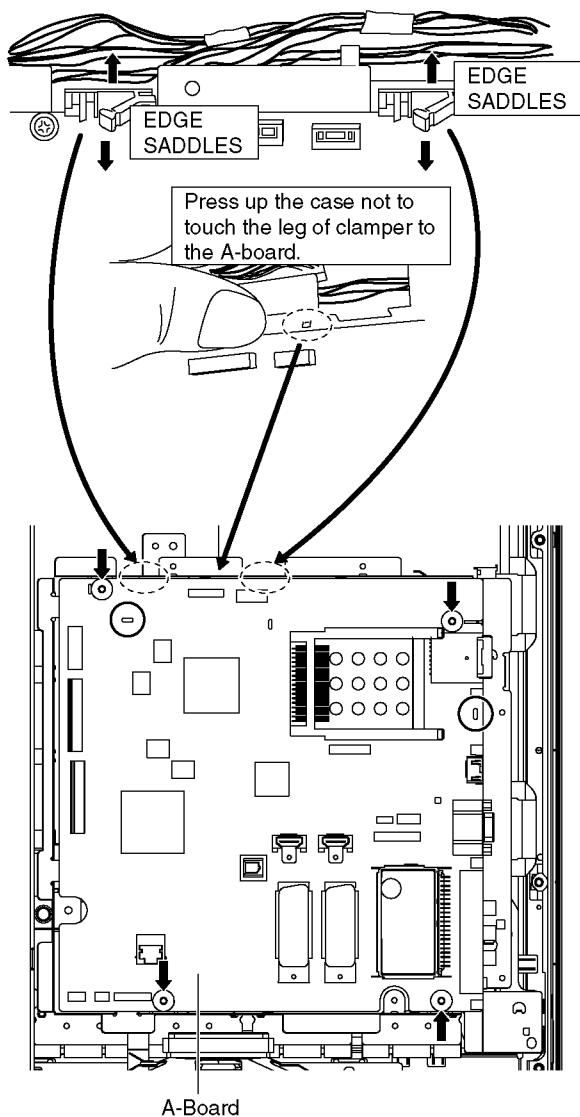


7.7. Remove the Speakers

1. Unlock the cable clamps to free the cable.
2. Disconnect the relay connector.
3. Remove the screws ($\times 2 \rightarrow$) and remove the Speaker R.
4. Disconnect the connector (A12). (See section 7.5.)
5. Remove the screws ($\times 2 \rightarrow$) and remove the Speaker L.

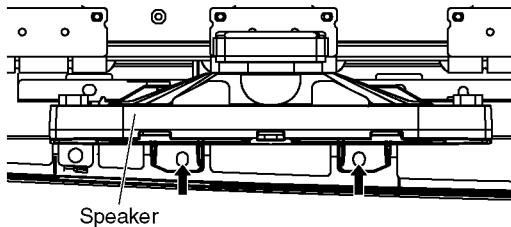


7.8. Remove the Control button unit

1. Disconnect the connector (C14).
2. Remove the screws ($\times 2 \rightarrow$).
3. Remove the Control button unit.

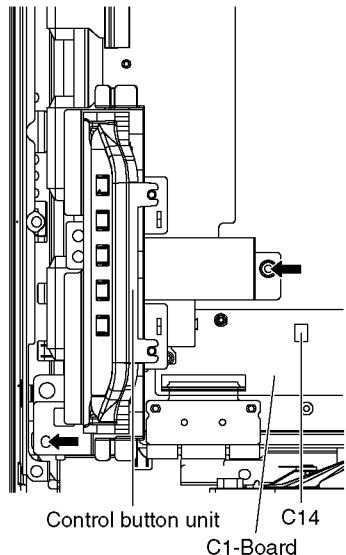


7.9. Remove the GK-Board

1. Remove the Control button unit. (See section 7.8.)
2. Remove the screws ($\times 2 \rightarrow$).
3. Remove the GK-Board MTG. metal.

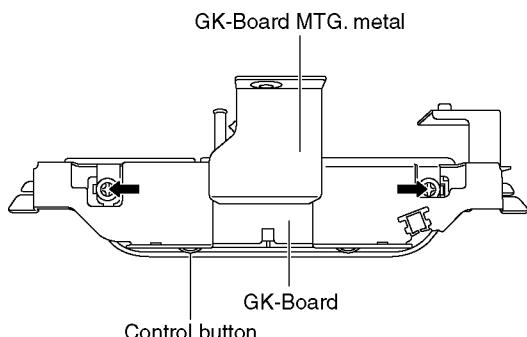


4. Remove the claw ($\times 3 \rightarrow$).
5. Disconnect the connector (GK1).

6. Remove the GK-Board from Control button.

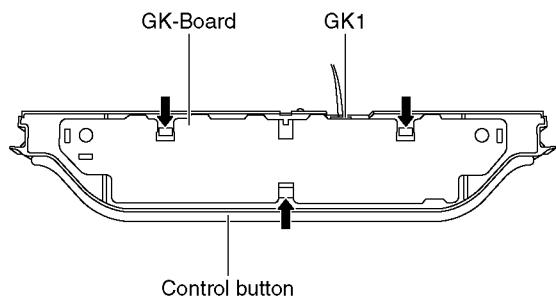


7.10. Remove the SU-Board

1. Remove the flexible cables (SU1, SU2, SU3 and SU4) connected to the SU-Board.
2. Remove the flexible cable (SU11-SD11) and the bridge connector (SC41-SU41).
3. Remove the molding prop ($\times 1 \Rightarrow$).
4. Remove the screws ($\times 2 \rightarrow$, $\times 2 \Rightarrow$) and remove the SU-Board.

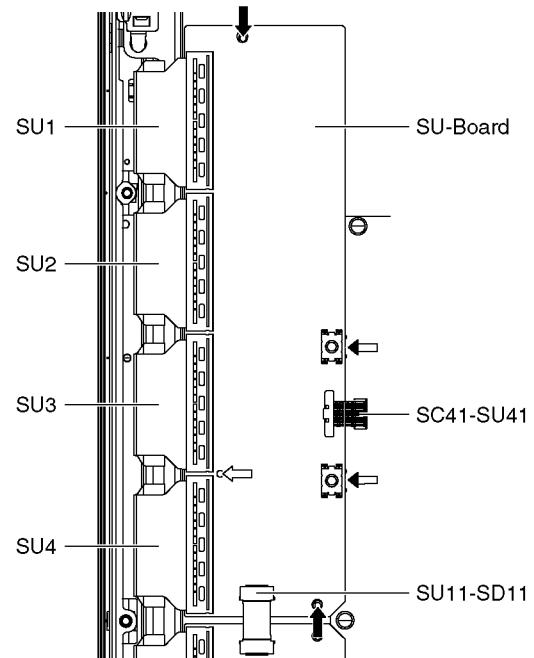


7.11. Remove the SD-Board

1. Remove the Control button unit. (See section 7.8.)
2. Remove the flexible cables (SD1, SD2, SD3 and SD4) connected to the SD-Board.
3. Remove the flexible cable (SU11-SD11) and the bridge connectors (SC42-SD42 and SC46-SD46).
4. Remove the molding prop ($\times 1 \Rightarrow$).
5. Remove the screws ($\times 2 \Rightarrow$, $\times 2 \Rightarrow$) and remove the SD-Board.

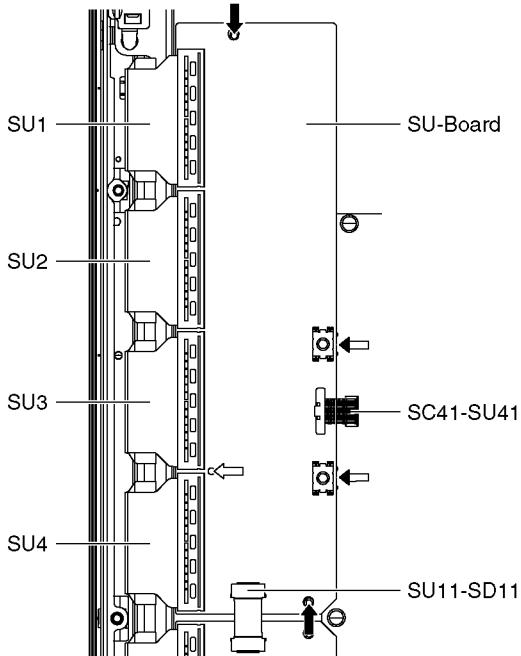


7.12. Remove the SC-Board

1. Remove the SU-Board and SD-Board. (See section 7.10. and 7.11.)
2. Unlock the cable clamps to free the cable.
3. Disconnect the connector (SC2).
4. Disconnect the flexible cable (SC20).
5. Remove the screws ($\times 7 \Rightarrow$) and remove the SC-Board.

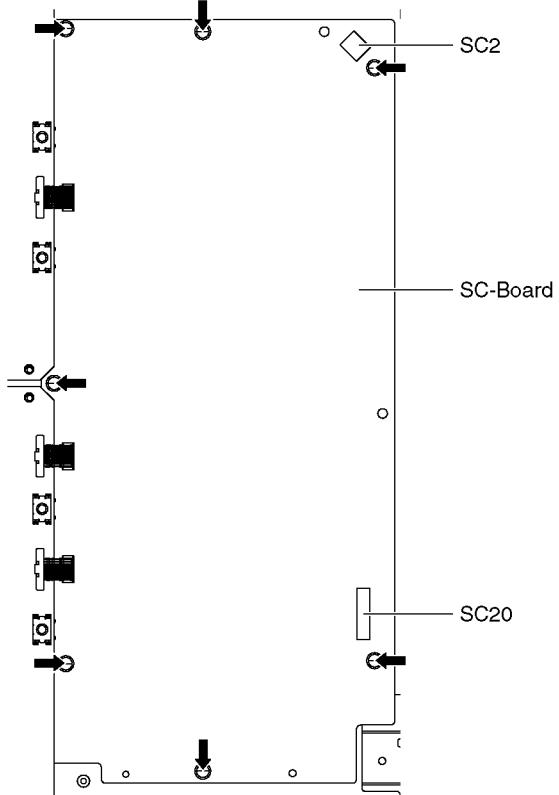


7.13. Remove the SS2-Board

1. Remove the Tuner unit. (See section 7.5.)
2. Disconnect the bridge connector (SS21-SS24) and disconnect the flexible cable (SS58).
3. Remove the screws ($\times 2 \Rightarrow$) and remove the SS2-Board.

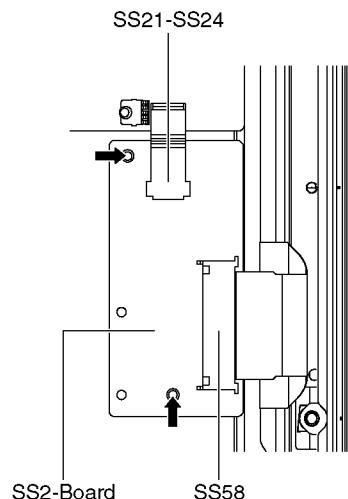


7.14. Remove the SS-Board

1. Remove the Tuner unit. (See section 7.5.)
2. Unlock the cable clamps to free the cable.
3. Disconnect the connectors (SS11 and SS33).
4. Disconnect the flexible cables (SS61 and SS64).
5. Disconnect the bridge connector (SS21-SS24).
6. Remove the screws ($\times 7 \rightarrow$) and remove the SS-Board.

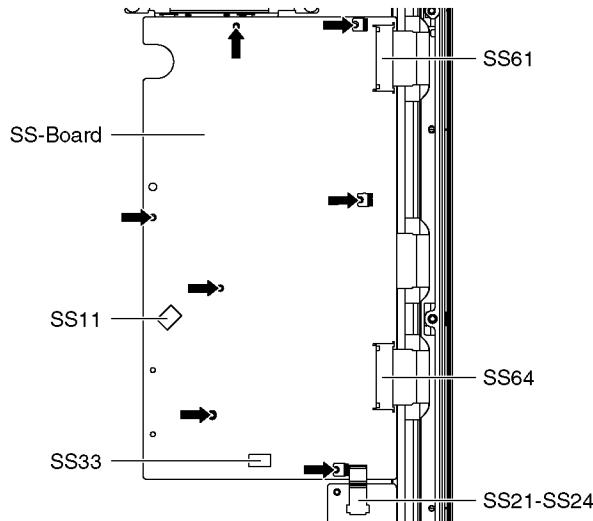


7.15. Remove the Hanger metals and the Stand brackets

1. Remove the Plasma panel section from the servicing stand and lay on a flat surface such as a table (covered by a soft cloth) with the Plasma panel surface facing downward.
2. Remove the Hanger metals (L, R) fastening screws ($\times 4 \rightarrow$ each) and remove the Hanger metals (L, R).

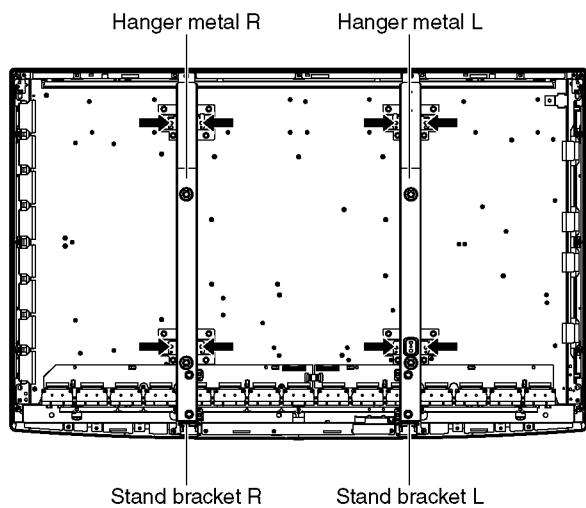


3. Remove the Stand brackets (L, R) fastening screws ($\times 4 \rightarrow$ each) and remove the Stand bracket metals (L, R) and the Stand brackets (L, R).

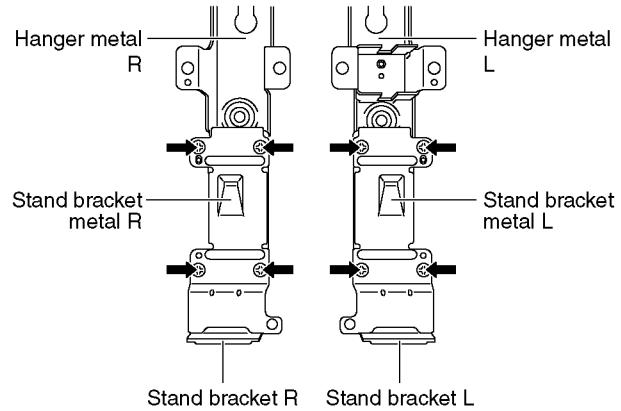


7.16. Remove the C1-Board

1. Remove the Control button unit. (See section 7.8.)
2. Remove the Hanger metal R and the Stand bracket R. (See section 7.15.)
3. Remove the flexible cables holder fastening screws ($\times 16 \rightarrow$).
4. Disconnect the flexible cables (CB1, CB2, CB3, CB4, CB5, CB6, CB7 and CB8).
5. Disconnect the connector (C14).
6. Disconnect the flexible cables (C10 and C11).
7. Remove the screws ($\times 4 \rightarrow$) and remove the C1-Board.

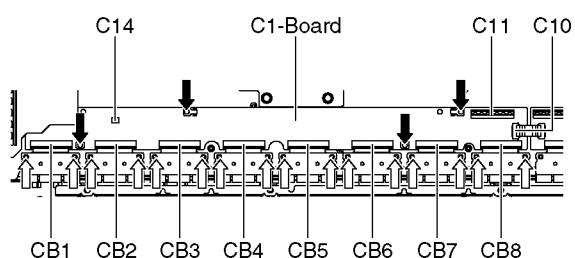


7.17. Remove the C2-Board

1. Remove the Tuner unit. (See section 7.5.)
2. Remove the Hanger metal L and the Stand bracket L. (See section 7.15.)
3. Remove the flexible cables holder fastening screws ($\times 14 \rightarrow$).
4. Disconnect the flexible cables (CB9, CB10, CB11, CB12, CB13, CB14 and CB15).
5. Disconnect the flexible cables (C20 and C21).
6. Disconnect the connectors (C23 and C25).
7. Remove the screws ($\times 4 \rightarrow$) and remove the C2-Board.

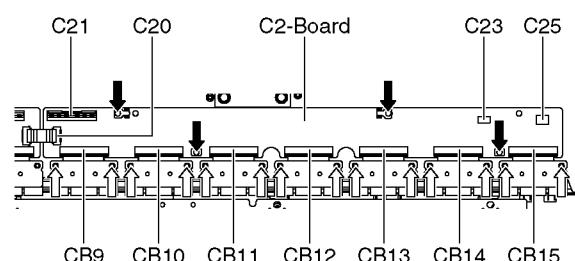


7.18. Remove the Plasma panel section from the Cabinet assy (glass)


1. Remove the cabinet assy and the plasma panel fastening screws ($\times 2 \rightarrow$).

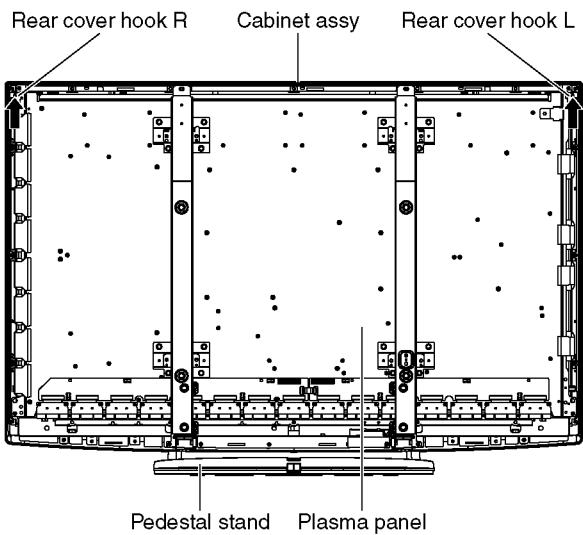

2. For leaving the plasma panel from the front frame, pull the bottom of the cabinet assy forward, lift, and remove.

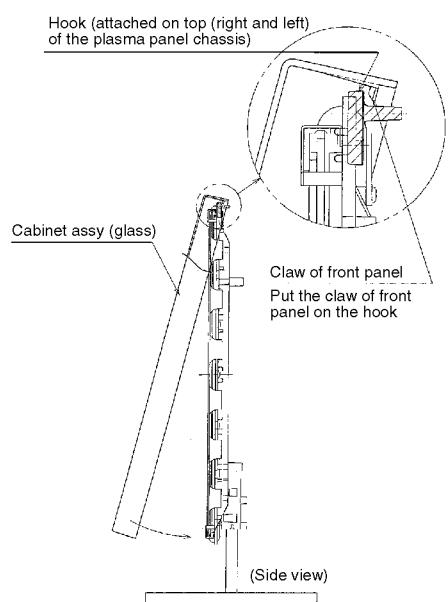


3. Remove the Rear cover hooks (L, R).

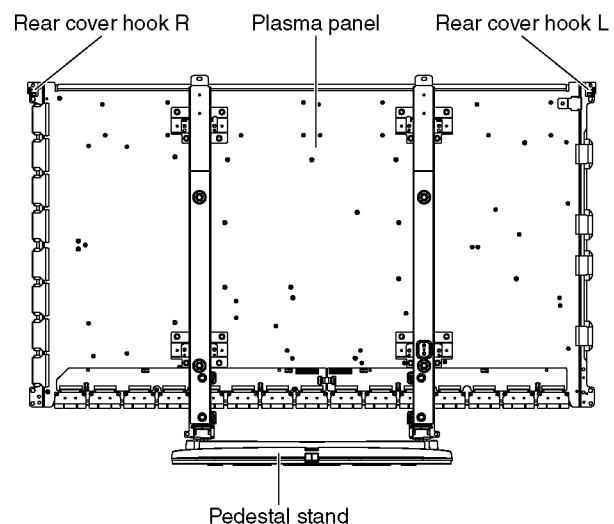


7.19. Remove the S-Board

1. Remove the Cabinet assy. (See section 7.18.)
2. Remove the S-Board shield case.

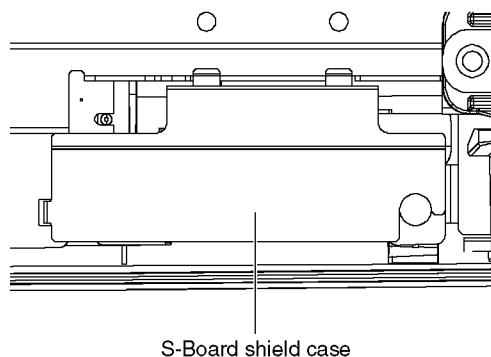


3. Remove the screws ($\times 2 \rightarrow$) and remove the S-Board unit.

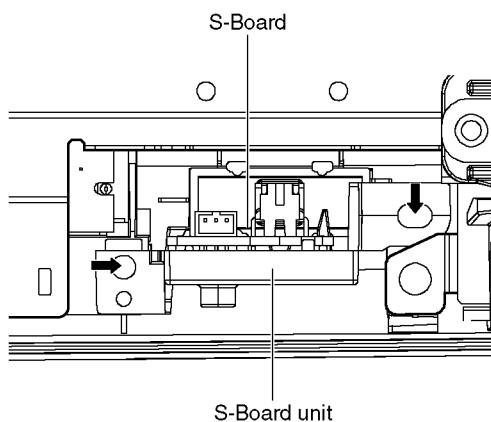


4. Disconnect the connector (S1).
5. Remove the Power button.

6. Remove the screw ($\times 1 \rightarrow$) and remove the S-Board.

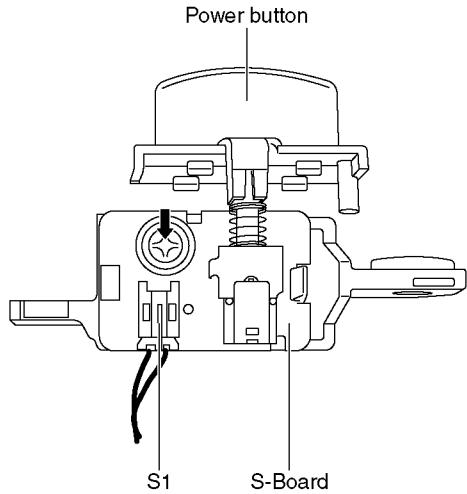


7.20. Remove the Front glass

1. Remove the Cabinet assy. (See section 7.20.)
2. Remove the S-Board. (See section 7.19.)
3. Remove the screws ($\times 5 \rightarrow$).
4. Remove the screws ($\times 4 \rightarrow$).
5. Remove the Glass holder side (L, R).
6. Remove the screws ($\times 7 \rightarrow$).
7. Remove the Glass holder top front.
8. Remove the Glass holder bottom front.
9. Remove the Front glass.

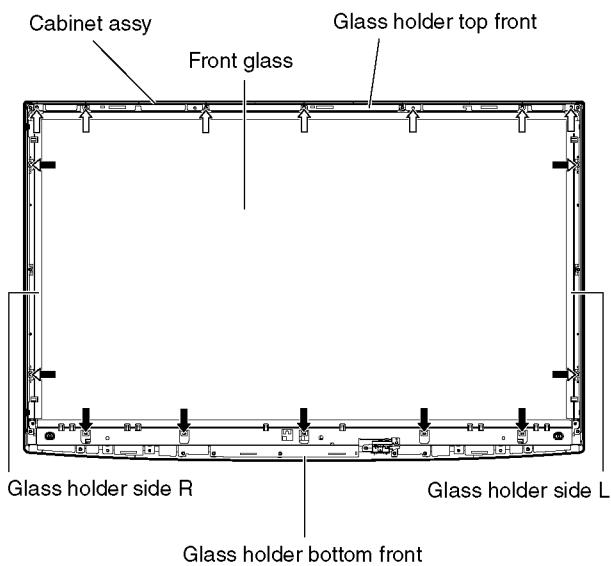


7.21. Remove the K-Board

1. Remove the Front glass. (See section 7.20.)
2. Remove the screw ($\times 2 \rightarrow$).
3. Remove the claw ($\times 1 \rightarrow$).
4. Disconnect the connector (K1) and remove the K-Board from LED Panel.

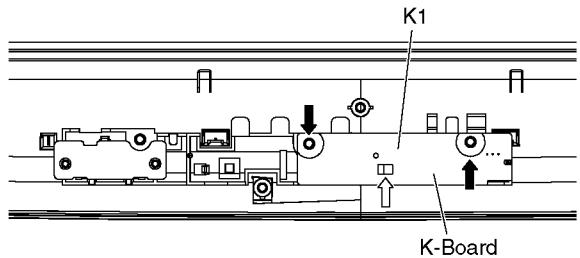

7.22. Remove the GK-Board

1. Remove the Front glass. (See section 7.20.)
2. Remove the claws ($\times 3 \rightarrow$).
3. Disconnect the connector (GL02) and remove the GL-Board.

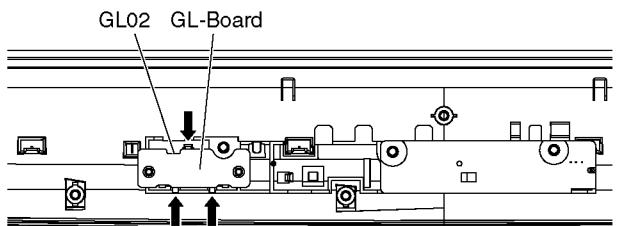

7.23. Replace the plasma panel

Caution:

A new plasma panel itself without Hanger metals is fragile.

To avoid the damage to new plasma panel, carry a new plasma panel taking hold of the Hanger metals after assembling the Hanger metals and the Stand brackets.

1. Place a carton box packed a new plasma panel on the flat surface of the work bench.
2. Open a box and without taking a new plasma panel; Attach the C1-Board and the C2-Board, connect the flexible cables from the plasma panel to the C1-Board and the C2-Board, and fit the flexible cable holders.
3. Attach the Hanger metals and the Stand brackets to the new plasma panel.
4. Place the plasma panel on the servicing stand taking hold of the Hanger metals.
5. Attach the cabinet assy and each P.C. Board and so on, to the new plasma panel.

*When fitting the cabinet assy, be careful not to allow any debris, dust or handling residue to remain between the front glass and plasma panel.

8 Measurements and Adjustments

8.1. Adjustment Procedure

8.1.1. Driver Set-up

8.1.1.1. Item / Preparation

1. Input a white signal to plasma video input.

2. Set the picture controls as follows.

Picture menu: Dynamic

PNR: Min

Aspect: 16:9

Caution

1. First perform Vsus adjustment.

2. The Vscn voltages are measured from the Vad (Vad_base), but may be measured from the GND (GND_base) in an unavoidable case.

8.1.1.2. Adjustments


Adjust driver section voltages referring the panel data on the panel data label.

Check or adjust the following voltages with the multimeter.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	Vsus \pm 2V	VR251(P)	*
Ve	TPVE (SS)	Ve \pm 2.5V	Fixed	*
Vset	TPVSET (SC)	290V \pm 9V	Fixed	
Vad	TPVAD (SC)	- 195V \pm 2V	VR16600 (SC)	
Vscn	TPVSCN (SC)	Vad_base : 148V \pm 1V GND_base : - 47V \pm 3V	VR16841 (SC)	
Vda	TP9 (P)	60V + 1V, - 2V	Fixed	

*See the Panel label.


Panel Label information

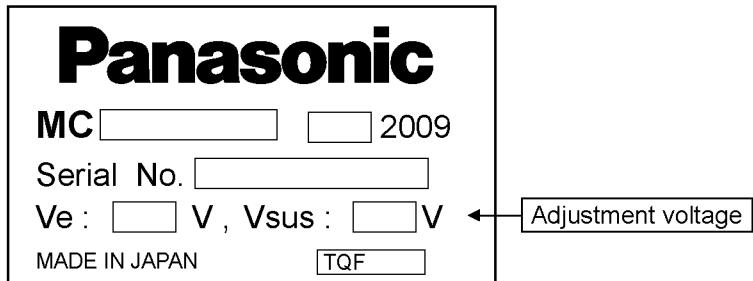

8.1.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.
2. Set the picture controls as follows.
Picture menu : Dynamic
PNR : Min
Aspect : 16:9
3. Connect Oscilloscope to TPSC1 (SC).
Check the voltage (T2) at 100μs period on the down slop.

	Test point	Volume	Level
T2	TPSC1 (SC)	VR16601 (SC)	250 V ± 10 V

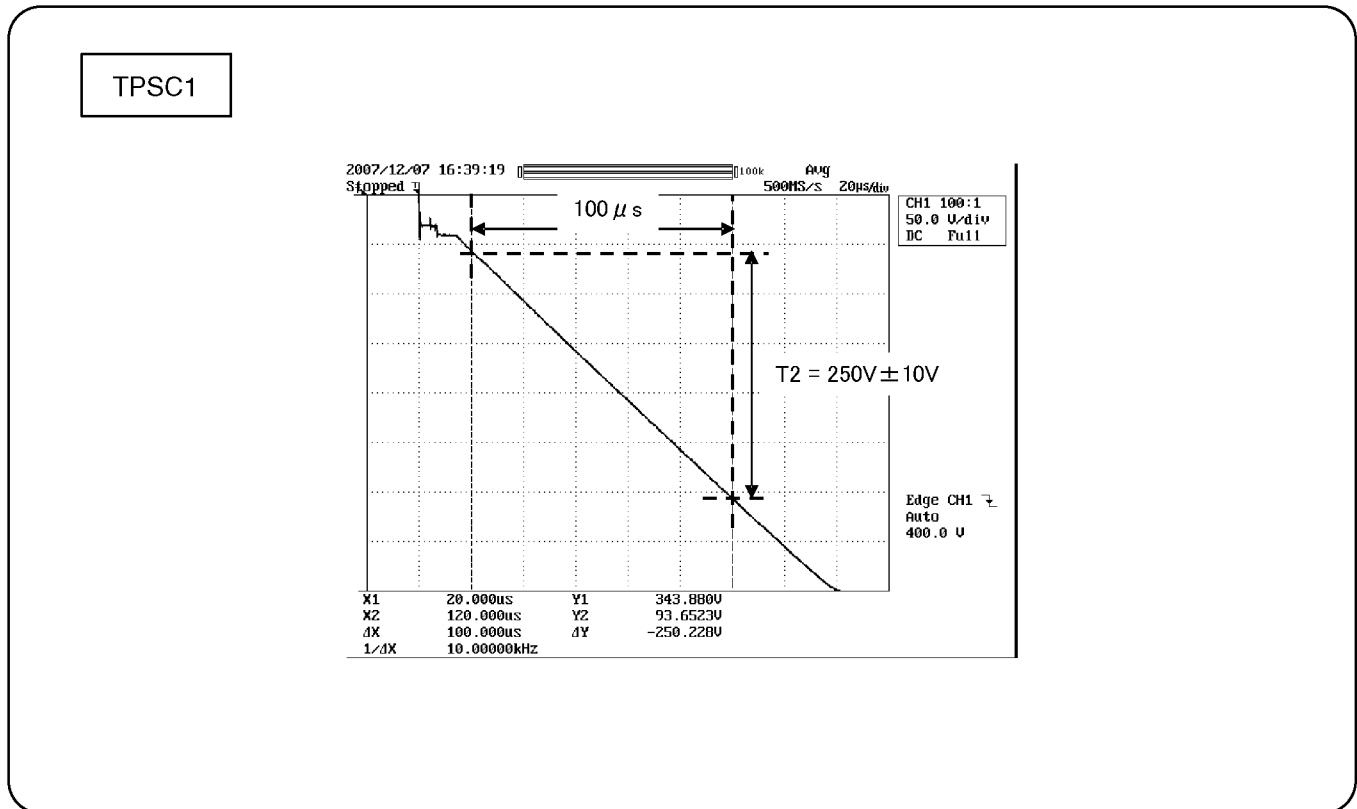

8.1.3. P.C.B. (Printed Circuit Board) exchange

8.1.3.1. Caution

1. To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

8.1.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.


P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	Vsus ± 2V	VR251 (P)	*
SC Board	Vad	TPVAD (SC)	-195V ± 2V	VR16600 (SC)	
SC Board	Vscn	TPVSCN (SC)	Vad_base : 148V ± 1V GND_base : -47V ± 3V	VR16841 (SC)	
A Board		White balance and Sub brightness for NTSC, PAL, HD, PC and 625i signals			

*See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

8.1.4. Adjustment Volume Location

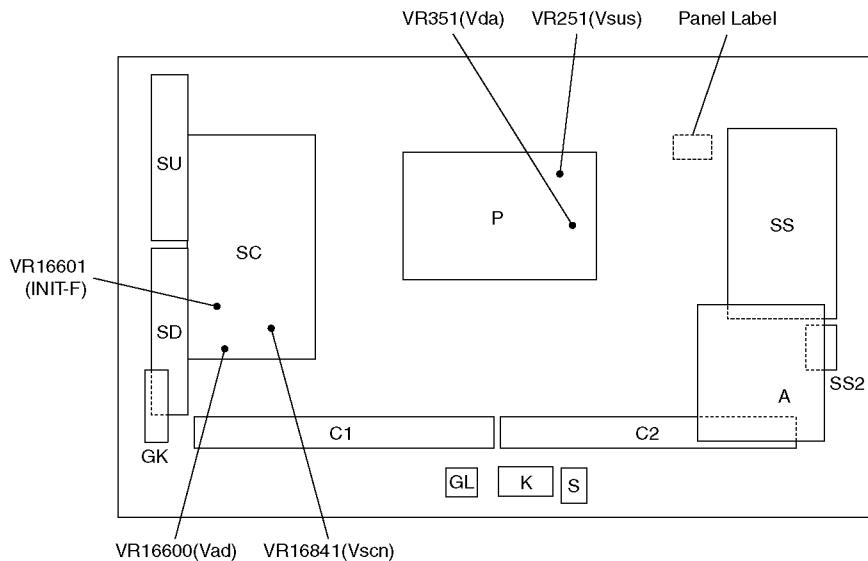



8.1.5. Test Point Location

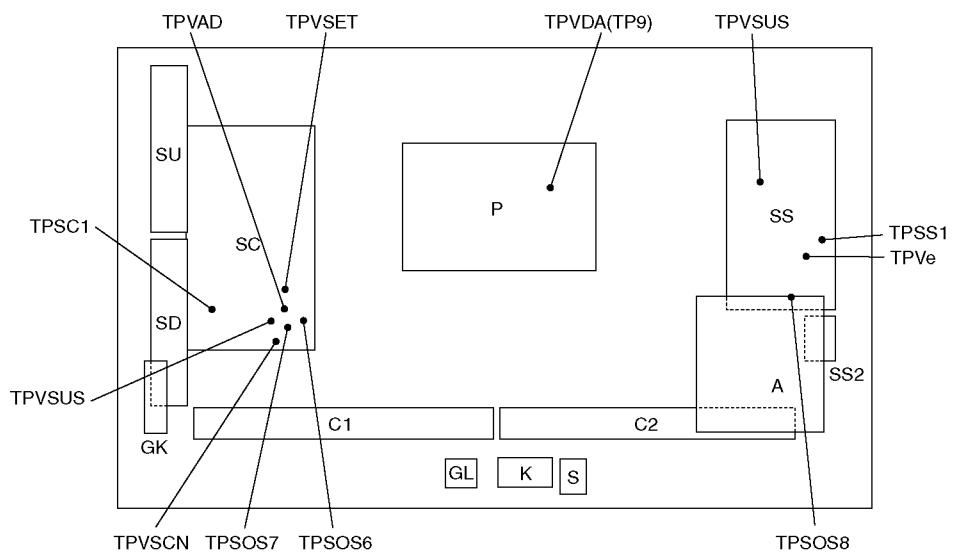


8.2. Adjustment

8.2.1. Sub-Contrast adjustment

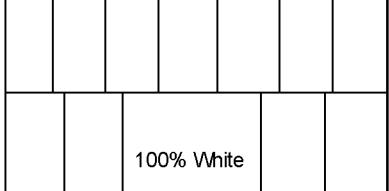Name of measuring instrument	Connection	Remarks
RF generator Base Band signal generator HD signal generator		
Steps	Remarks	
Adjustment of TV (RF system)	<p>Note: In adjustment, you must setting to modulation of signal at 85%.</p> <p>1. Receive a RF PAL 100% Full White or Split Colour bar shown as below .</p>  <p>2. Goes into service adjustment mode. 3. Push a [1] or [2] key, and goes into adjustment mode for [CONTRAST].</p> <p>Adjustment</p> <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p>	<p>Ref.: RF signal modulation spec. UK models: 80% Other models: 90%</p> <p>Note: Sub-contrast adjustment is unadjusted for AV/ HD input. But, when needing the adjustment chosen manually, please refer to [alternative method].</p>

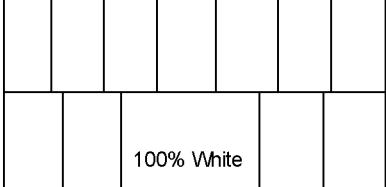Steps	Remarks
<p><u>Another procedure</u></p> <p>Adjustment of AV system</p> <p>1. PAL 100% Full White or Split Colour bar receive AV1(or AV2), shown as below.</p>  <p>2. Goes into service adjustment mode. 3. Push [1] or [2] key, and goes into adjustment mode for [Contrast].</p> <p>Adjustment</p> <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p>	

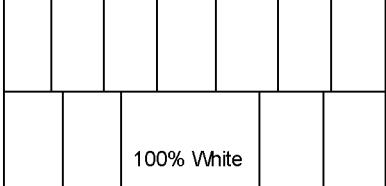Steps	Remarks
<p><u>Another procedure</u></p> <p>Adjustment of HD system</p> <p>1. At 1080i 100% Full White or Split colour bar receive component signal, as shown below.</p>  <p>2. Goes into service adjustment mode. 3. Push [1] or [2] key, and goes into adjustment mode for [Contrast].</p> <p>Adjustment</p> <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p>	

8.2.2. RF white balance adjustment


Name of measuring instrument	Connection	Remarks												
W/ B pattern Color analyzer (Minolta CA-100 or equivalent)	RF input Panel surface													
Steps	Remarks													
• Make sure the front panel to be used on the final set is fitted. • Make sure a color signal is not being shown before adjustment. • Put the color analyzer where there is little colour variation.	Picture menu : Dynamic ASPECT : 16:9													
Adjustment	Remarks													
1. Display the white balance pattern. 2. Enter the service adjustment mode. 3. A number key [1] or [2] are operated and [WB-ADJ] is displayed. Check that the color balance is [COOL]. 4. Select [G-CUTOFF] item, using the number-key [3] or [4], and set to [80], using the volume-key [+] or [-]. Also, [B-CUTOFF] and [R-CUTOFF] set to [80]. 5. Set [G-DRIVE] at [E0](37 inch / 42 inch), [D0](50 inch). 6. Touch the signal receiver of color analyzer to the highlight window's center, and adjust B drive and R drive so x, y become the [COLOR TEMP COOL] in the below table. 7. All RGB drive increase so that the maximum drive value of RGB may become [FC]. ([ALL-DRIVE] set to [FC].) 8. Set colorbalance to [NORMAL] using [7] key. 9. Fix G-CUTOFF , B-CUTOFF and R-CUTOFF at [80]. 10. Fix G drive at [E0] (37 inch / 42inch), [D0] (50 inch). 11. Adjust B-DRIVE and R-DRIVE so the highlight window's x, y become the [COLOR TEMP NORMAL] in the below table. 12. All RGB drive increase so that the maximum drive value of RGB may become [FC]. ([ALL-DRIVE] set to [FC].) 13. Set colorbalance to [WARM] using [7] key. 14. Fix G-CUTOFF , B-CUTOFF and R-CUTOFF at [80]. 15. Fix G drive at [E0] (37 inch / 42 inch), [D0] (50 inch). 16. Adjust B-DRIVE and R-DRIVE so the highlight window's x, y become the [COLOR TEMP WARM] in the below table. 17. All RGB drive increase so that the maximum drive value of RGB may become [FC]. ([ALL-DRIVE] set to [FC].)	Highlight section Signal amplitude 75% Value is Hex.													
Table 1. Color temp. target value														
<table border="1"> <thead> <tr> <th>COLOR TEMP</th><th>x</th><th>y</th></tr> </thead> <tbody> <tr> <td>COOL</td><td>0.288</td><td>0.296</td></tr> <tr> <td>NORMAL</td><td>0.301</td><td>0.319</td></tr> <tr> <td>WARM</td><td>0.316</td><td>0.339</td></tr> </tbody> </table>		COLOR TEMP	x	y	COOL	0.288	0.296	NORMAL	0.301	0.319	WARM	0.316	0.339	
COLOR TEMP	x	y												
COOL	0.288	0.296												
NORMAL	0.301	0.319												
WARM	0.316	0.339												

8.2.3. 1080i white balance adjustment


Name of measuring instrument	Connection	Remarks											
1080i W/ B pattern Color analyzer (Minolta CA-100 or equivalent)	Component input Panel surface												
Steps	Remarks												
<ul style="list-style-type: none"> • Make sure the front panel to be used on the final set is fitted. • Make sure a color signal is not being shown before adjustment. • Put the color analyzer where there is little colour variation. 	Picture menu : Dynamic ASPECT : 16:9												
Adjustment	Remarks												
<p>1. Display the white balance pattern. 2. Enter the service adjustment mode. 3. A number key [1] or [2] are operated and [WB-ADJ] is displayed. Check that the color balance is [COOL]. 4. Select [G-CUTOFF] item, using the number-key [3] or [4], and set to [80], using the volume-key [+] or [-]. Also, [B-CUTOFF] and [R-CUTOFF] set to [80]. 5. Set [G-DRIVE] at [E0](37 inch / 42 inch), [D0](50 inch). 6. Touch the signal receiver of color analyzer to the highlight window's center, and adjust B drive and R drive so x, y become the [COLOR TEMP COOL] in the below table. 7. All RGB drive increase so that the maximum drive value of RGB may become [FC]. ([ALL-DRIVE] set to [FC].) 8. Set colorbalance to [NORMAL] using [7] key. 9. Fix G-CUTOFF , B-CUTOFF and R-CUTOFF at [80]. 10. Fix G drive at [E0] (37 inch / 42inch), [D0] (50 inch). 11. Adjust B-DRIVE and R-DRIVE so the highlight window's x, y become the [COLOR TEMP NORMAL] in the below table. 12. All RGB drive increase so that the maximum drive value of RGB may become [FC]. ([ALL-DRIVE] set to [FC].) 13. Set colorbalance to [WARM] using [7] key. 14. Fix G-CUTOFF , B-CUTOFF and R-CUTOFF at [80]. 15. Fix G drive at [E0] (37 inch / 42 inch), [D0] (50 inch). 16. Adjust B-DRIVE and R-DRIVE so the highlight window's x, y become the [COLOR TEMP WARM] in the below table. 17. All RGB drive increase so that the maximum drive value of RGB may become [FC]. ([ALL-DRIVE] set to [FC].)</p> <p>Table 1. Color temp. target value</p> <table border="1"> <thead> <tr> <th>COLOR TEMP</th><th>x</th><th>y</th></tr> </thead> <tbody> <tr> <td>COOL</td><td>0.288</td><td>0.296</td></tr> <tr> <td>NORMAL</td><td>0.301</td><td>0.319</td></tr> <tr> <td>WARM</td><td>0.316</td><td>0.339</td></tr> </tbody> </table>	COLOR TEMP	x	y	COOL	0.288	0.296	NORMAL	0.301	0.319	WARM	0.316	0.339	Highlight section Signal amplitude 75% Value is Hex.
COLOR TEMP	x	y											
COOL	0.288	0.296											
NORMAL	0.301	0.319											
WARM	0.316	0.339											

9 Block Diagram


9.1. Main Block Diagram

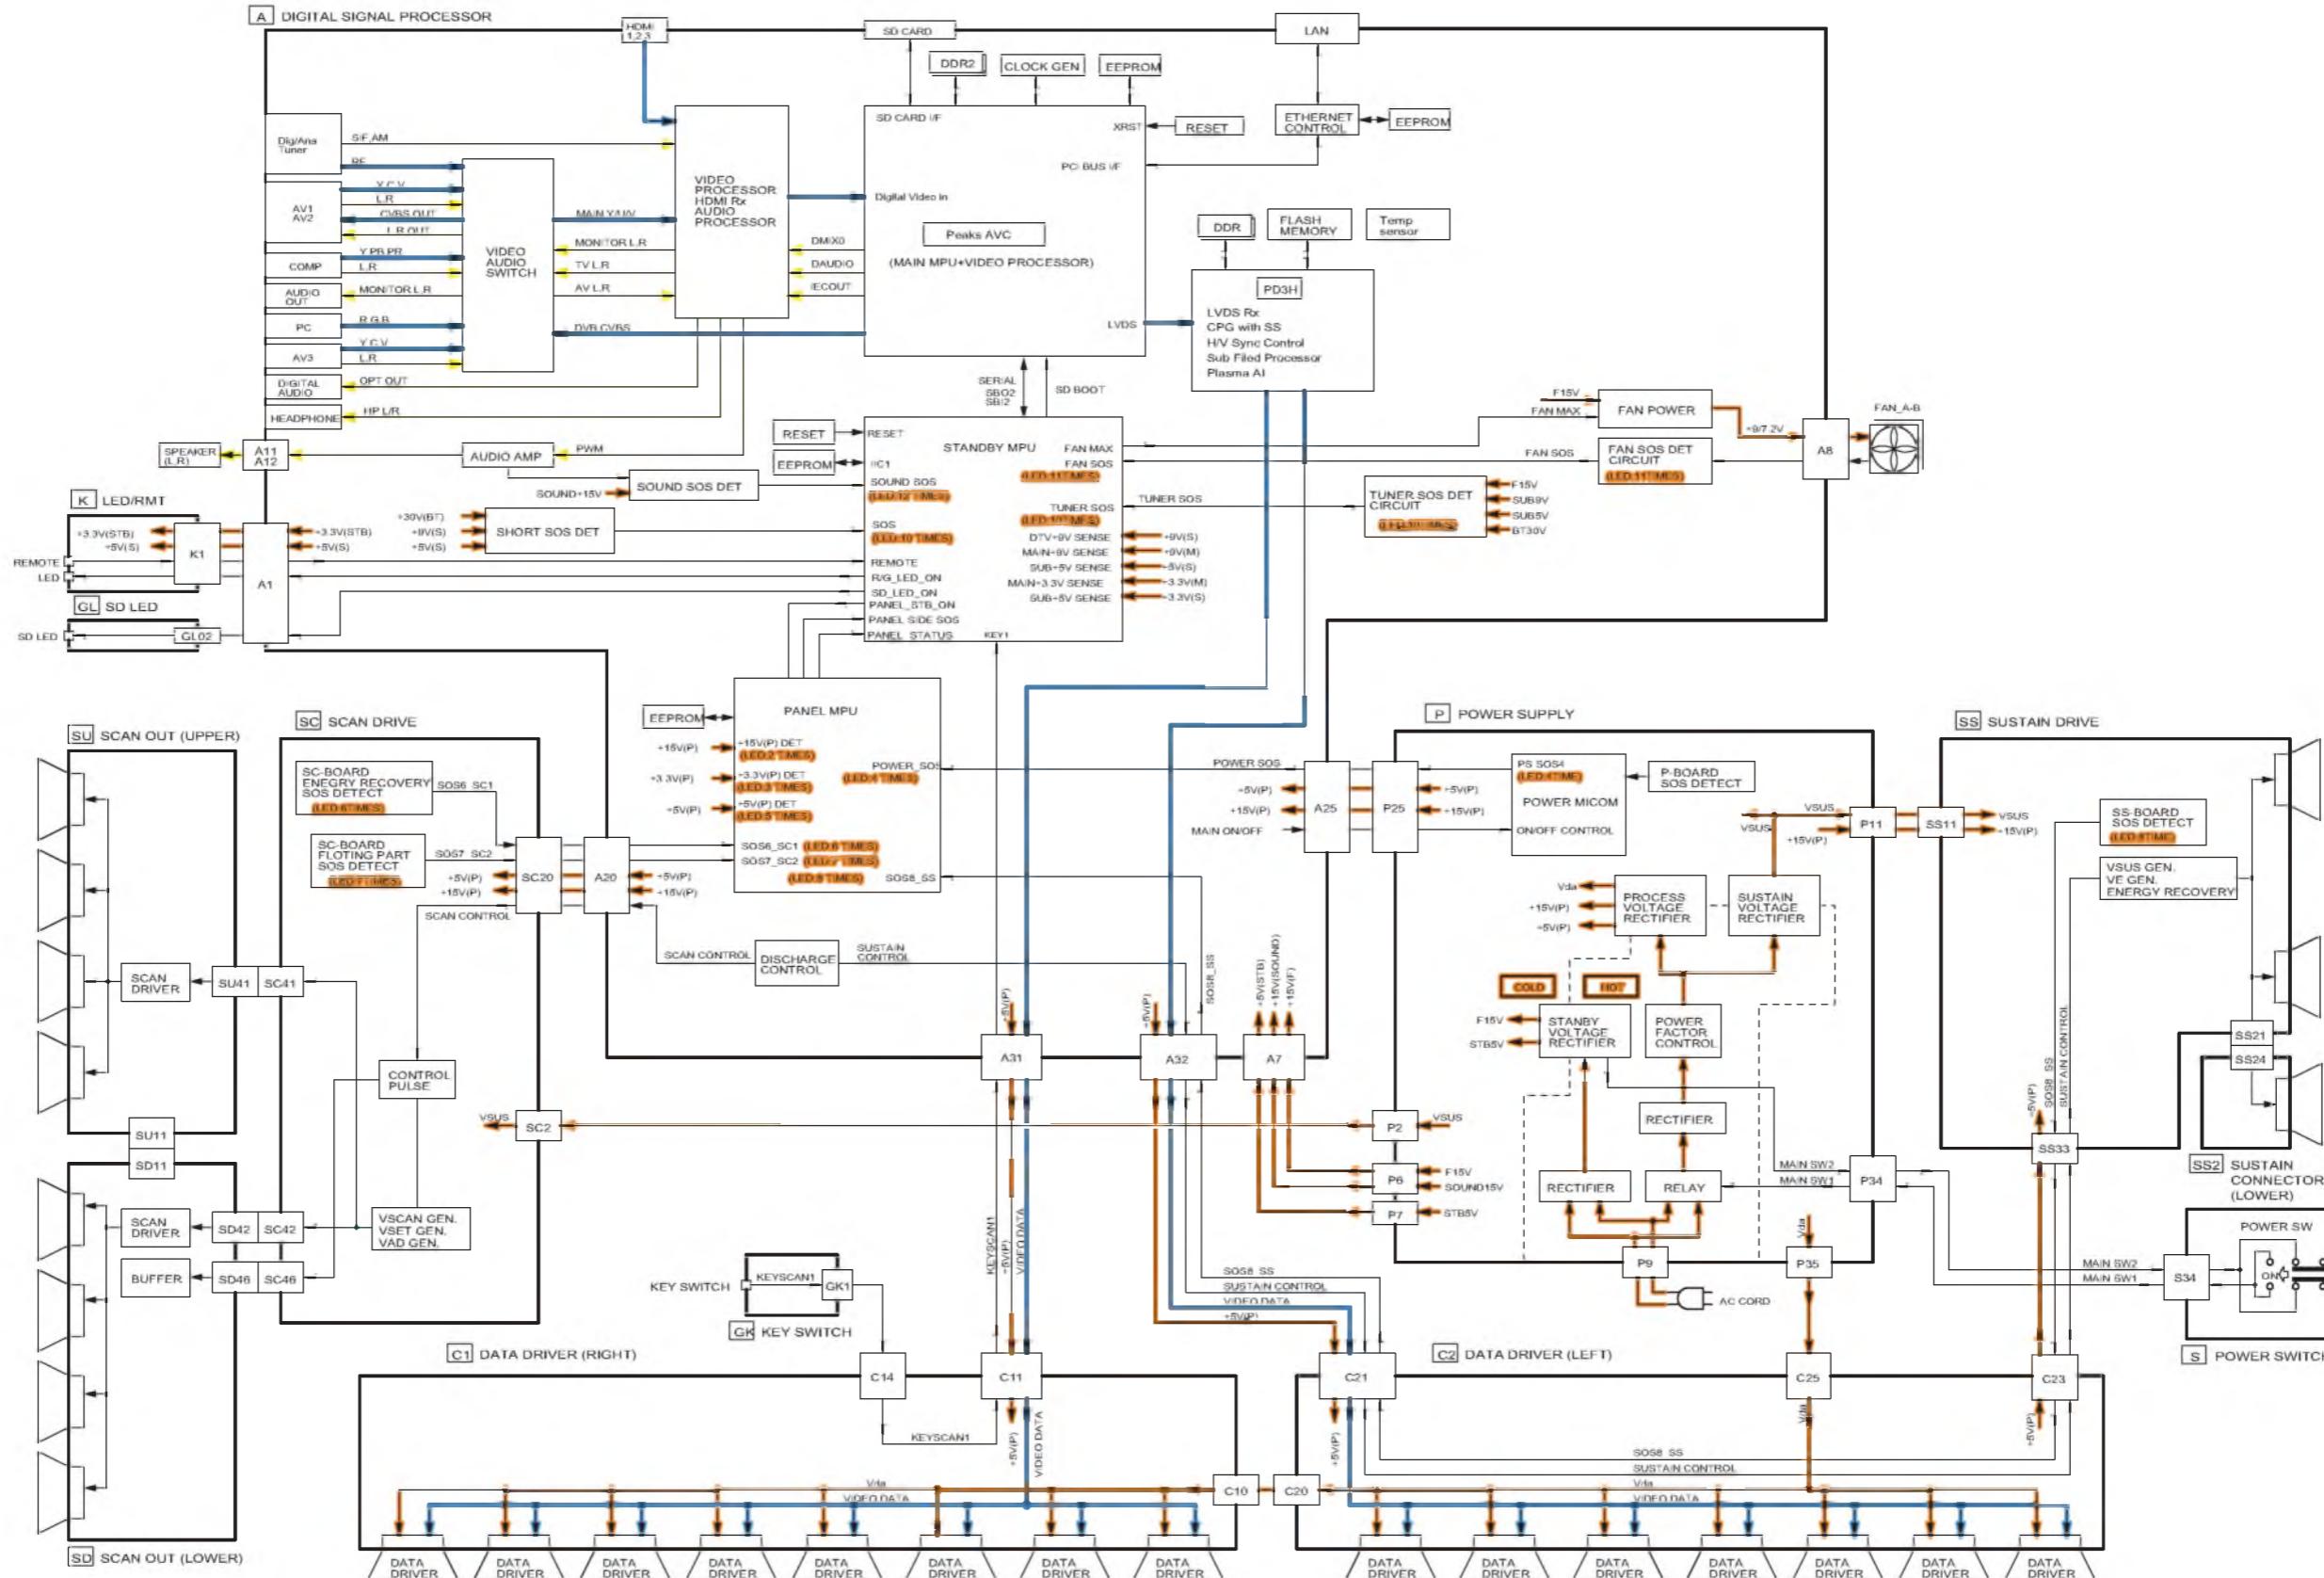


9.2. Block (1/4) Diagram


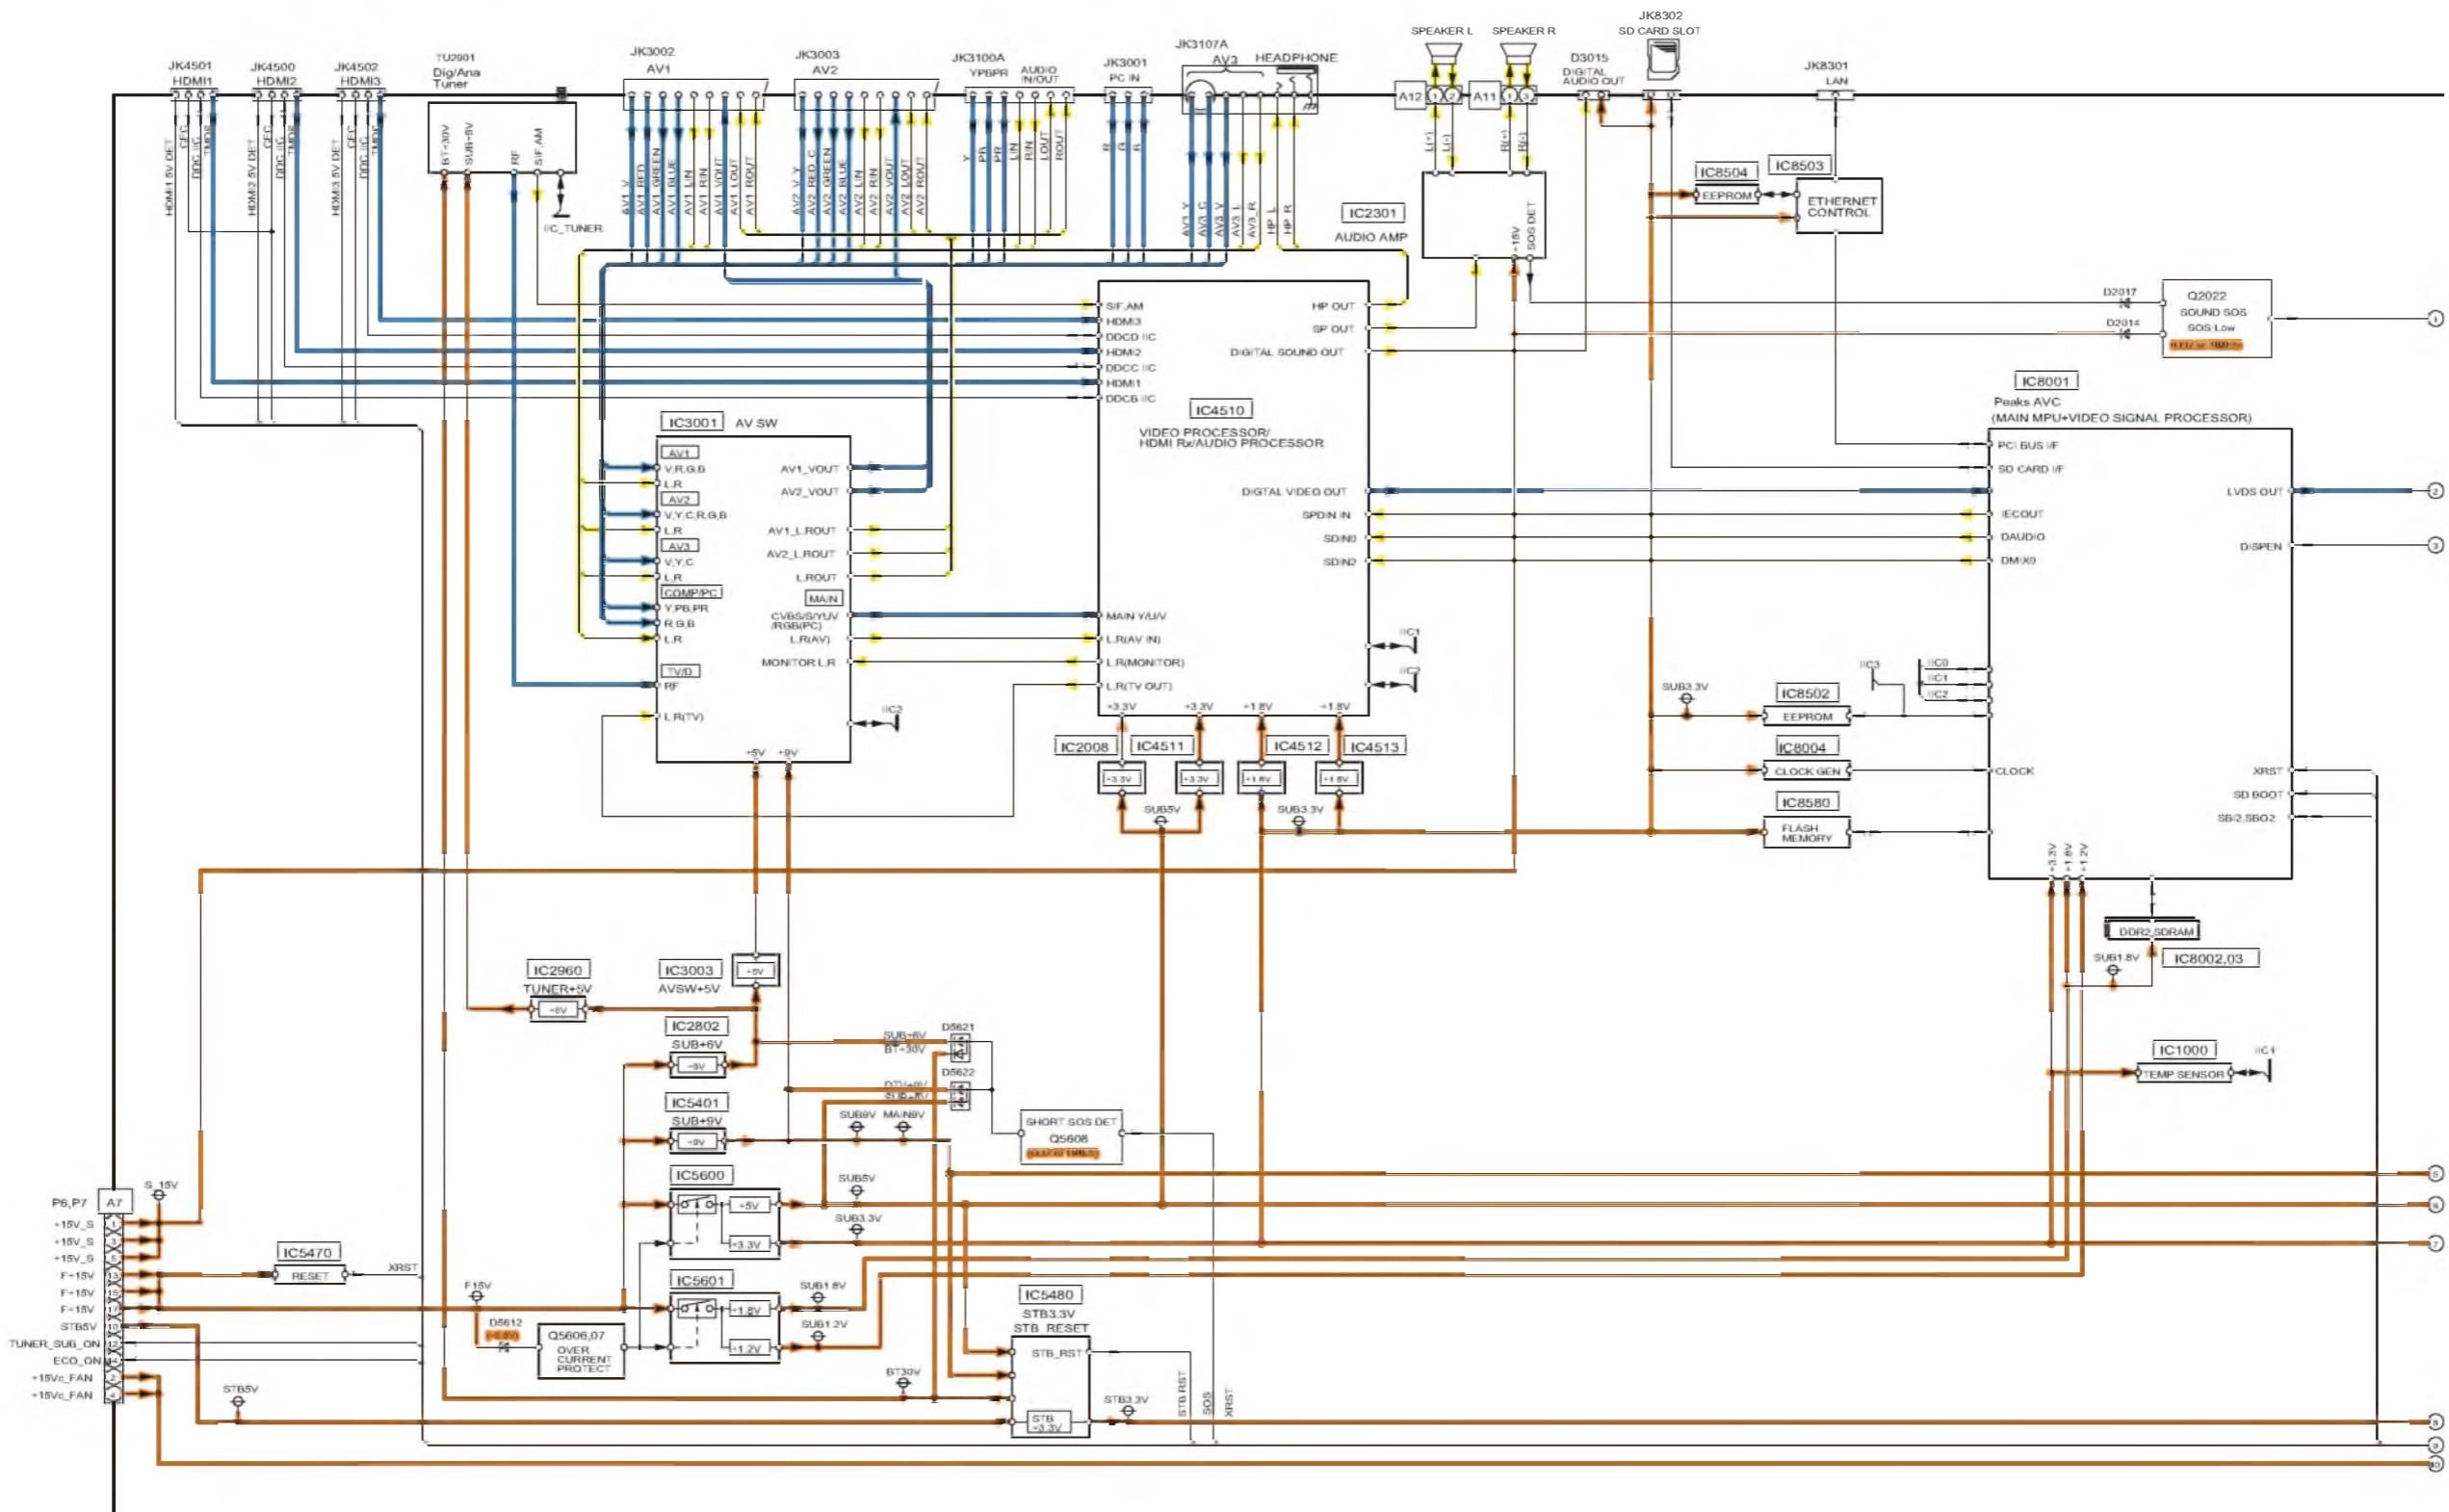


9.3. Block (2/4) Diagram

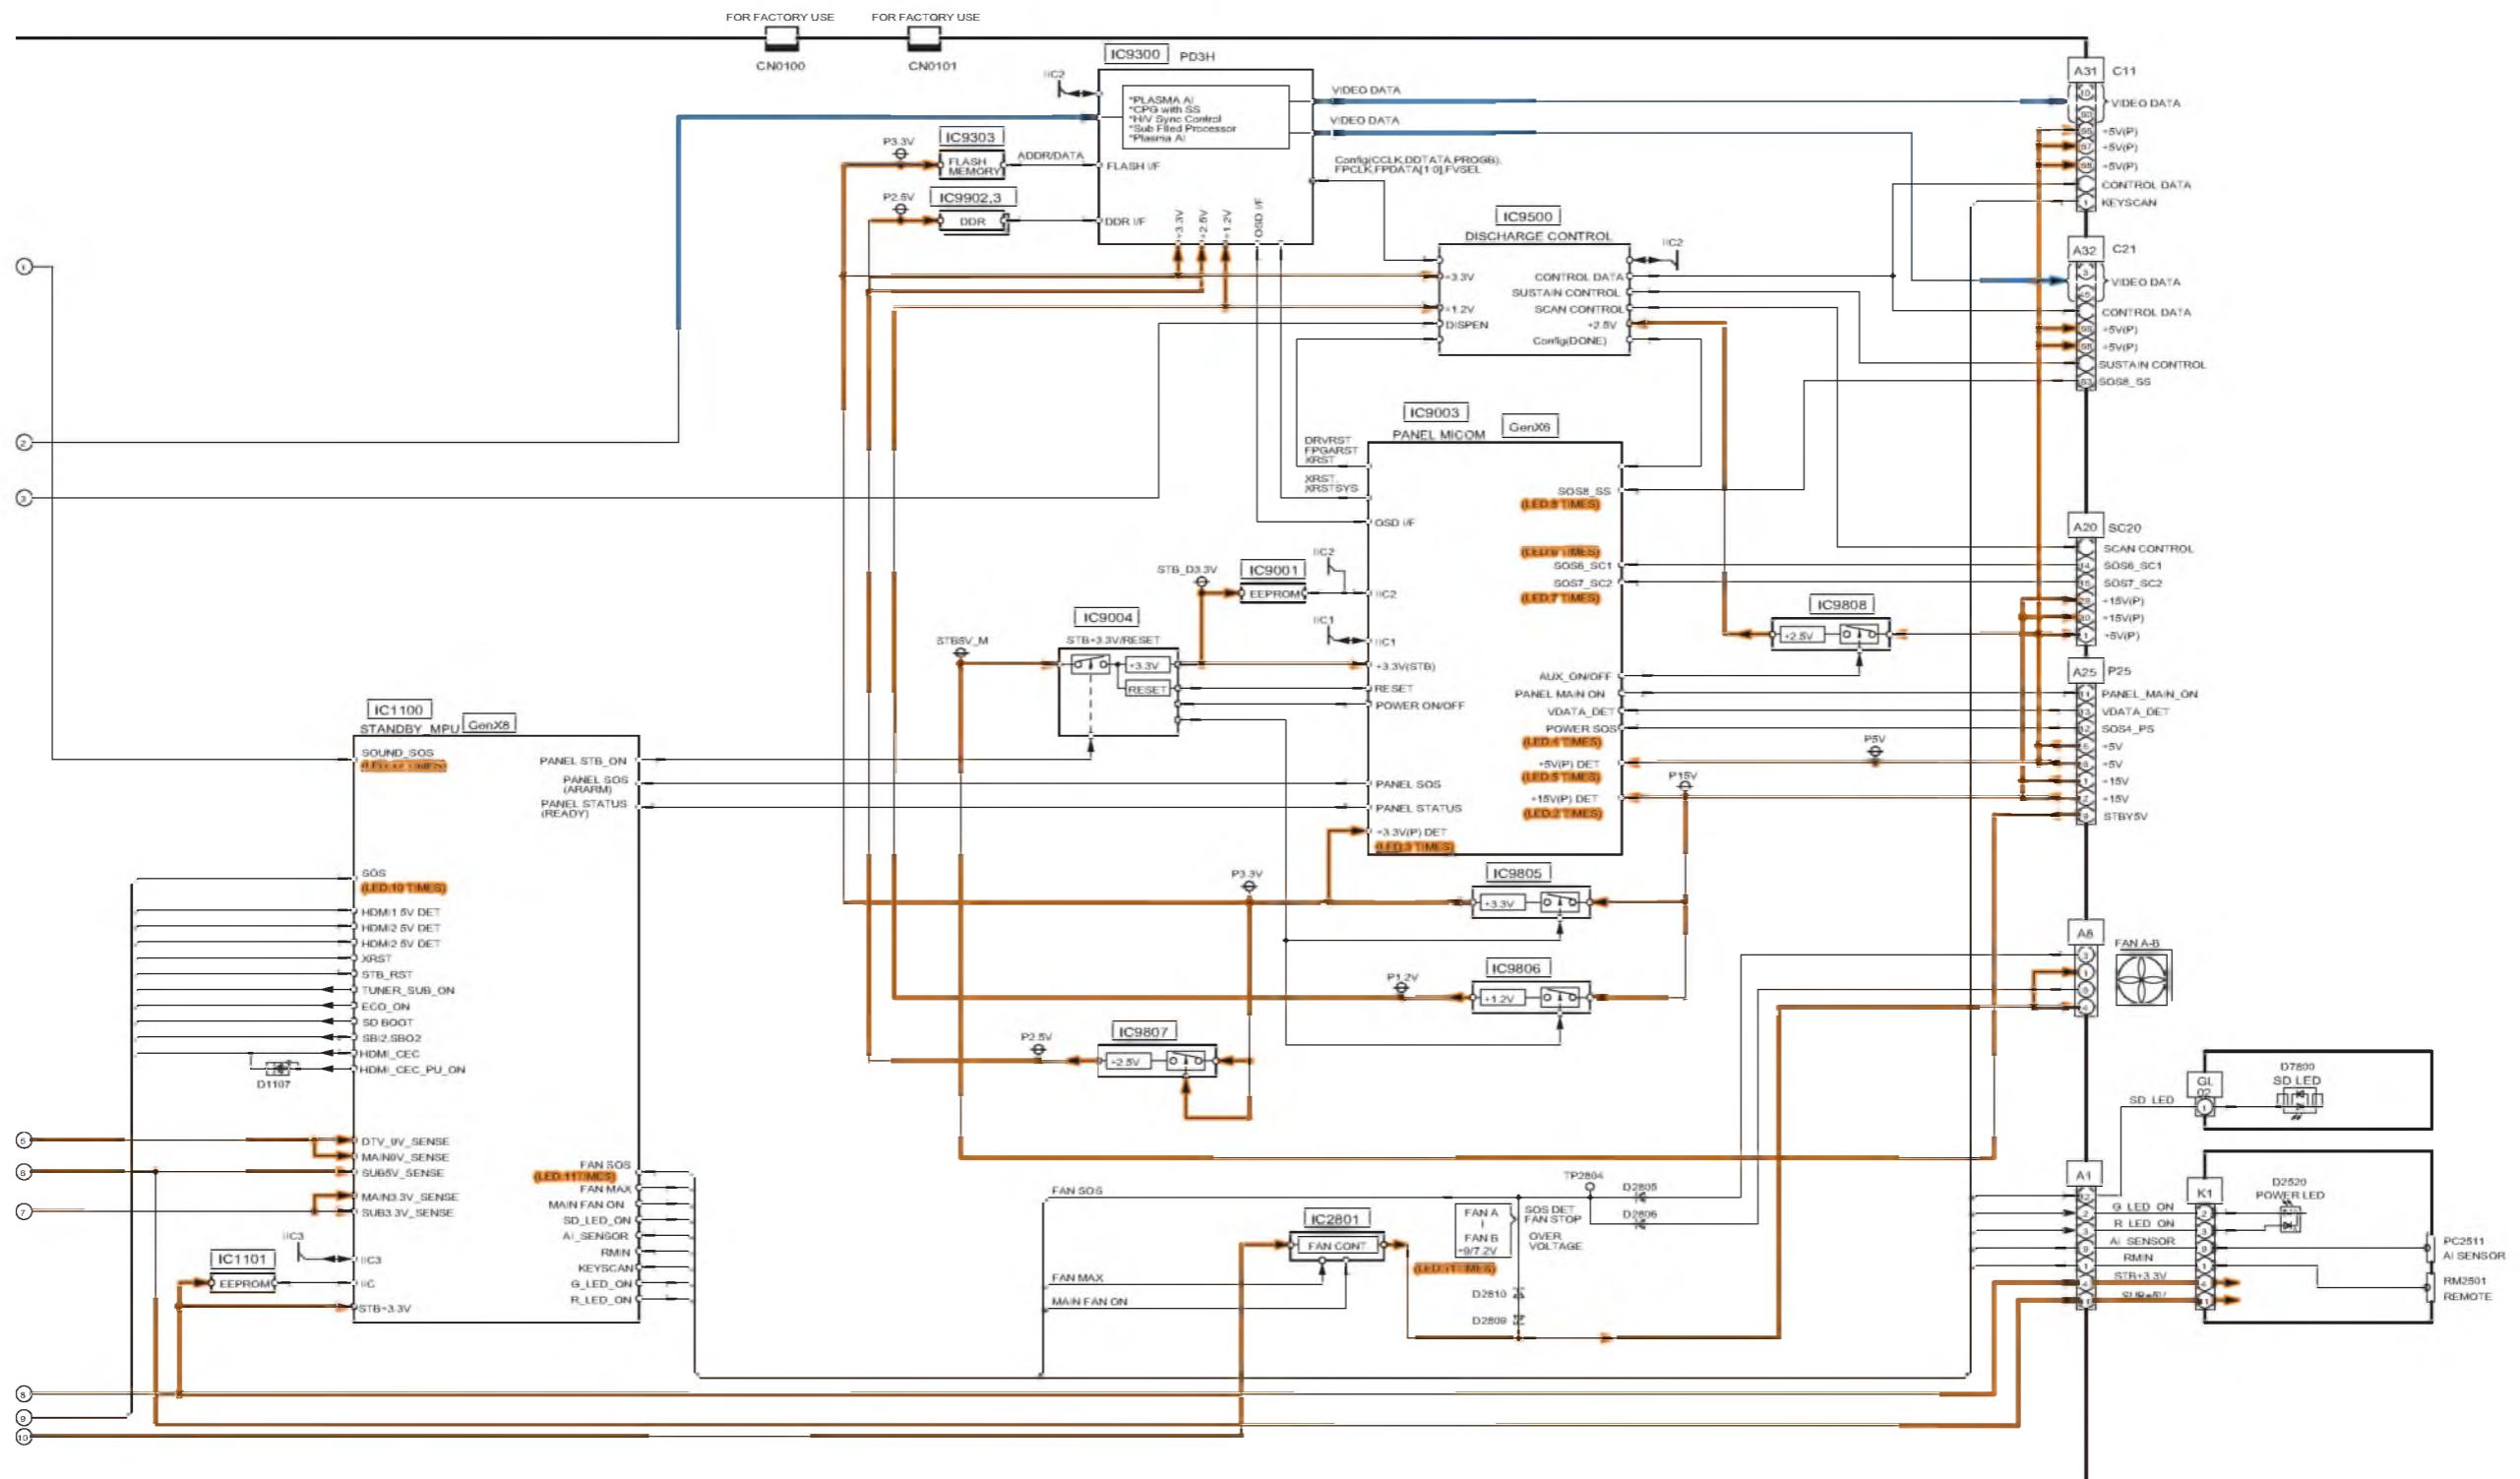

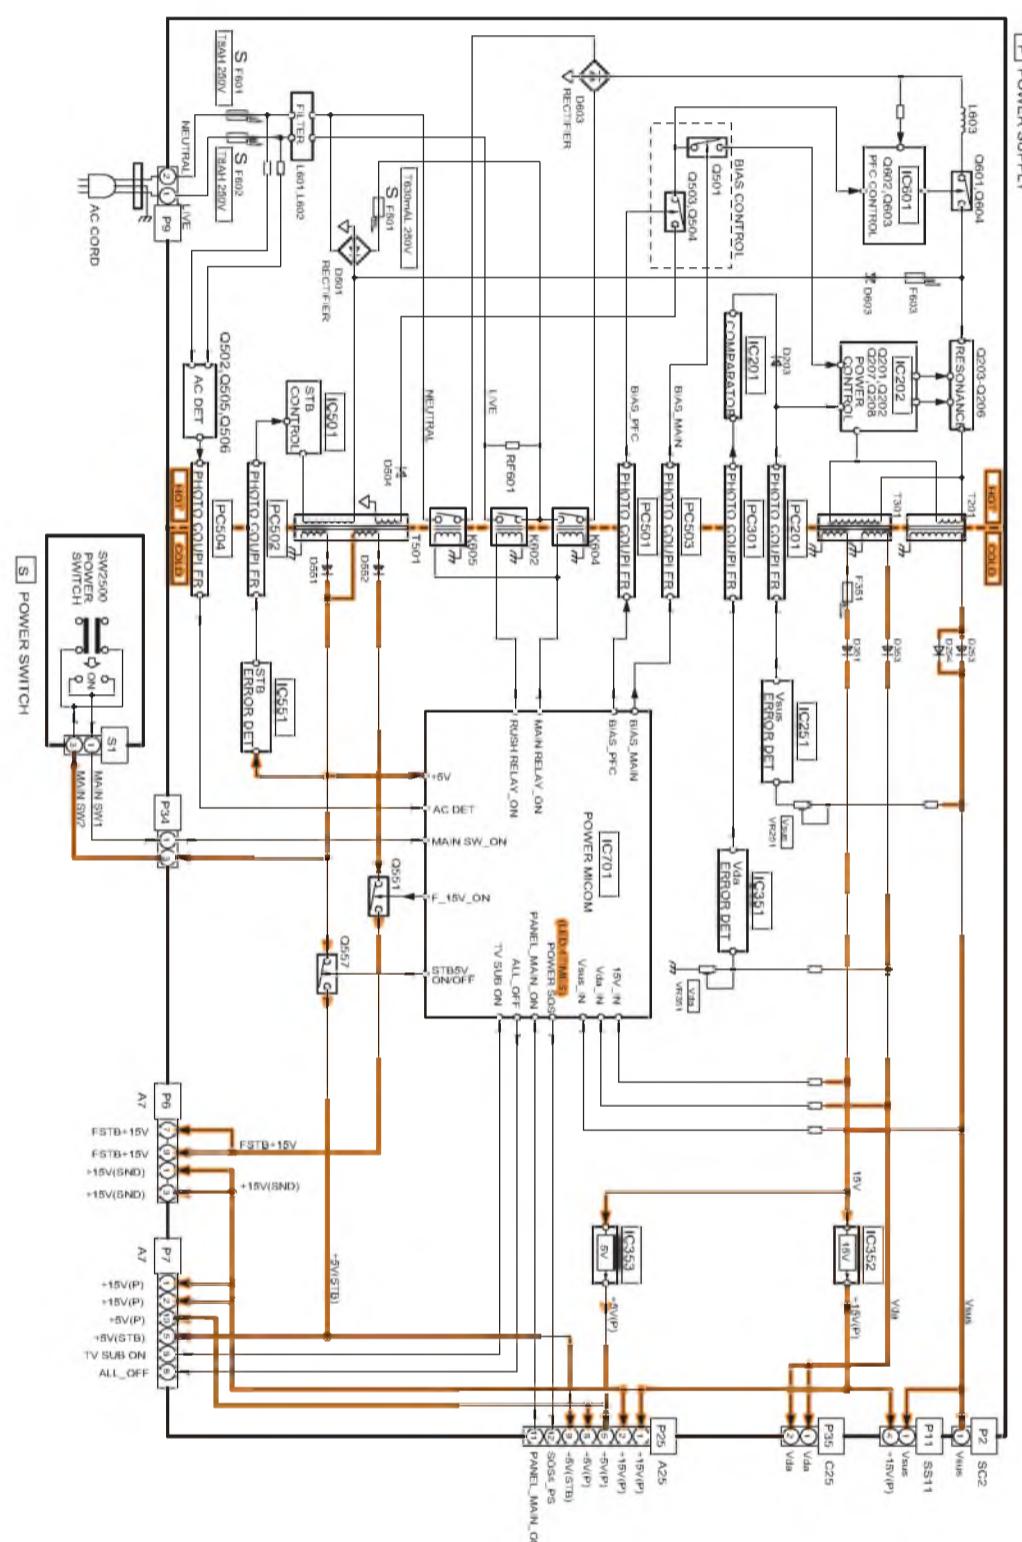

9.5. Block (4/4) Diagram

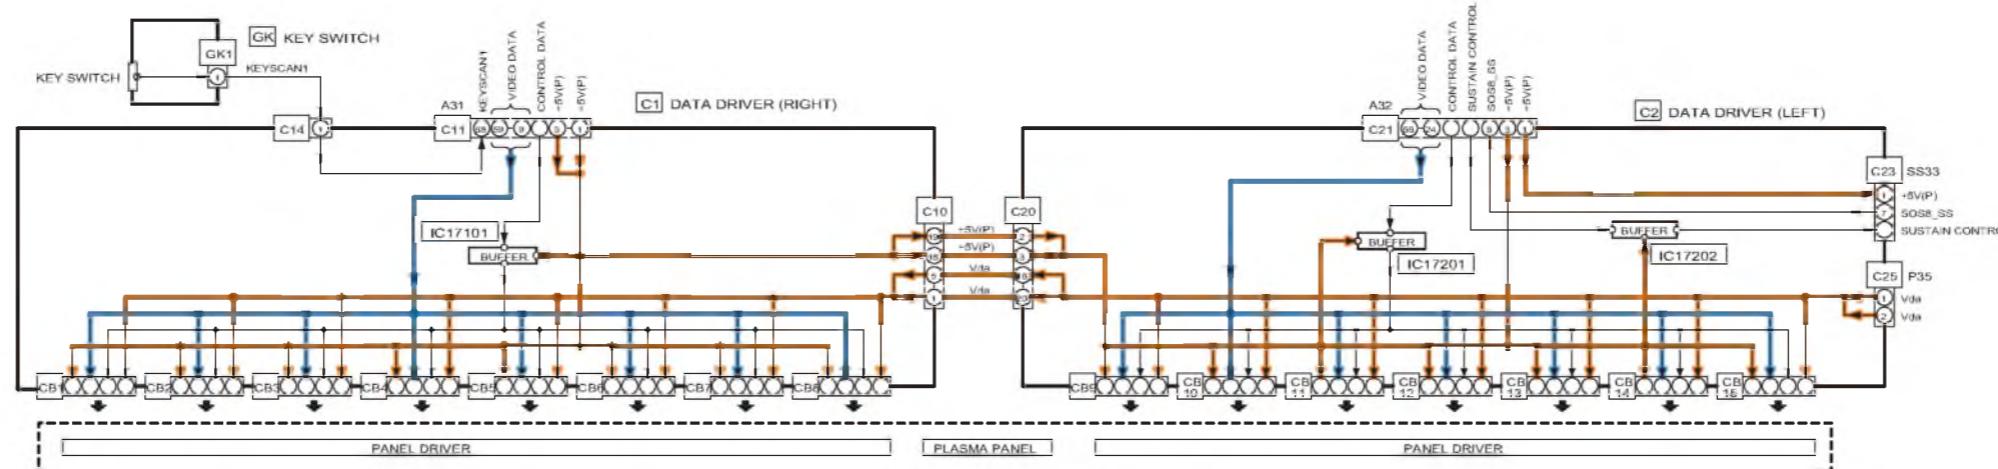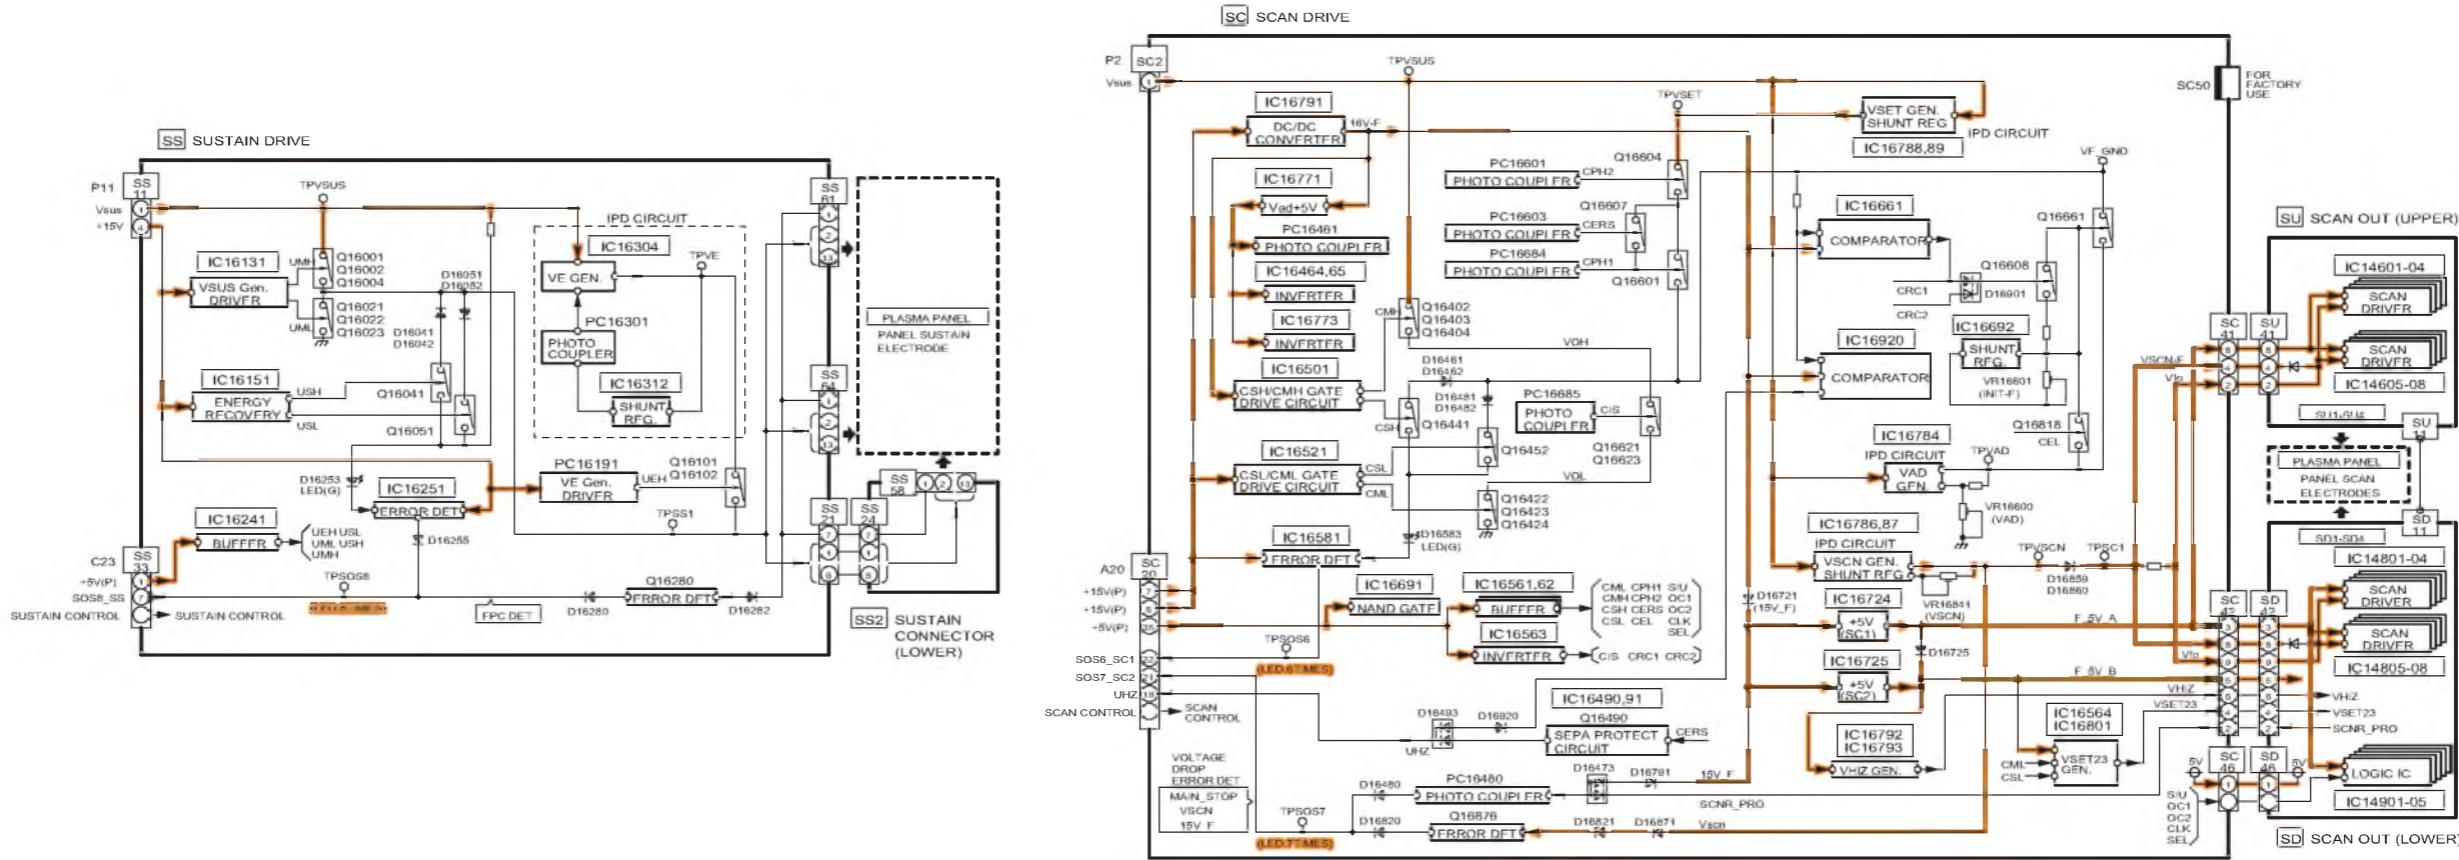

10 Wiring Connection Diagram

10.1. Caution statement.


Caution:

Please confirm that all flexible cables are assembled correctly.

Also make sure that they are locked in the connectors.



Verify by giving the flexible cables a very slight pull.

10.2. Wiring (1)

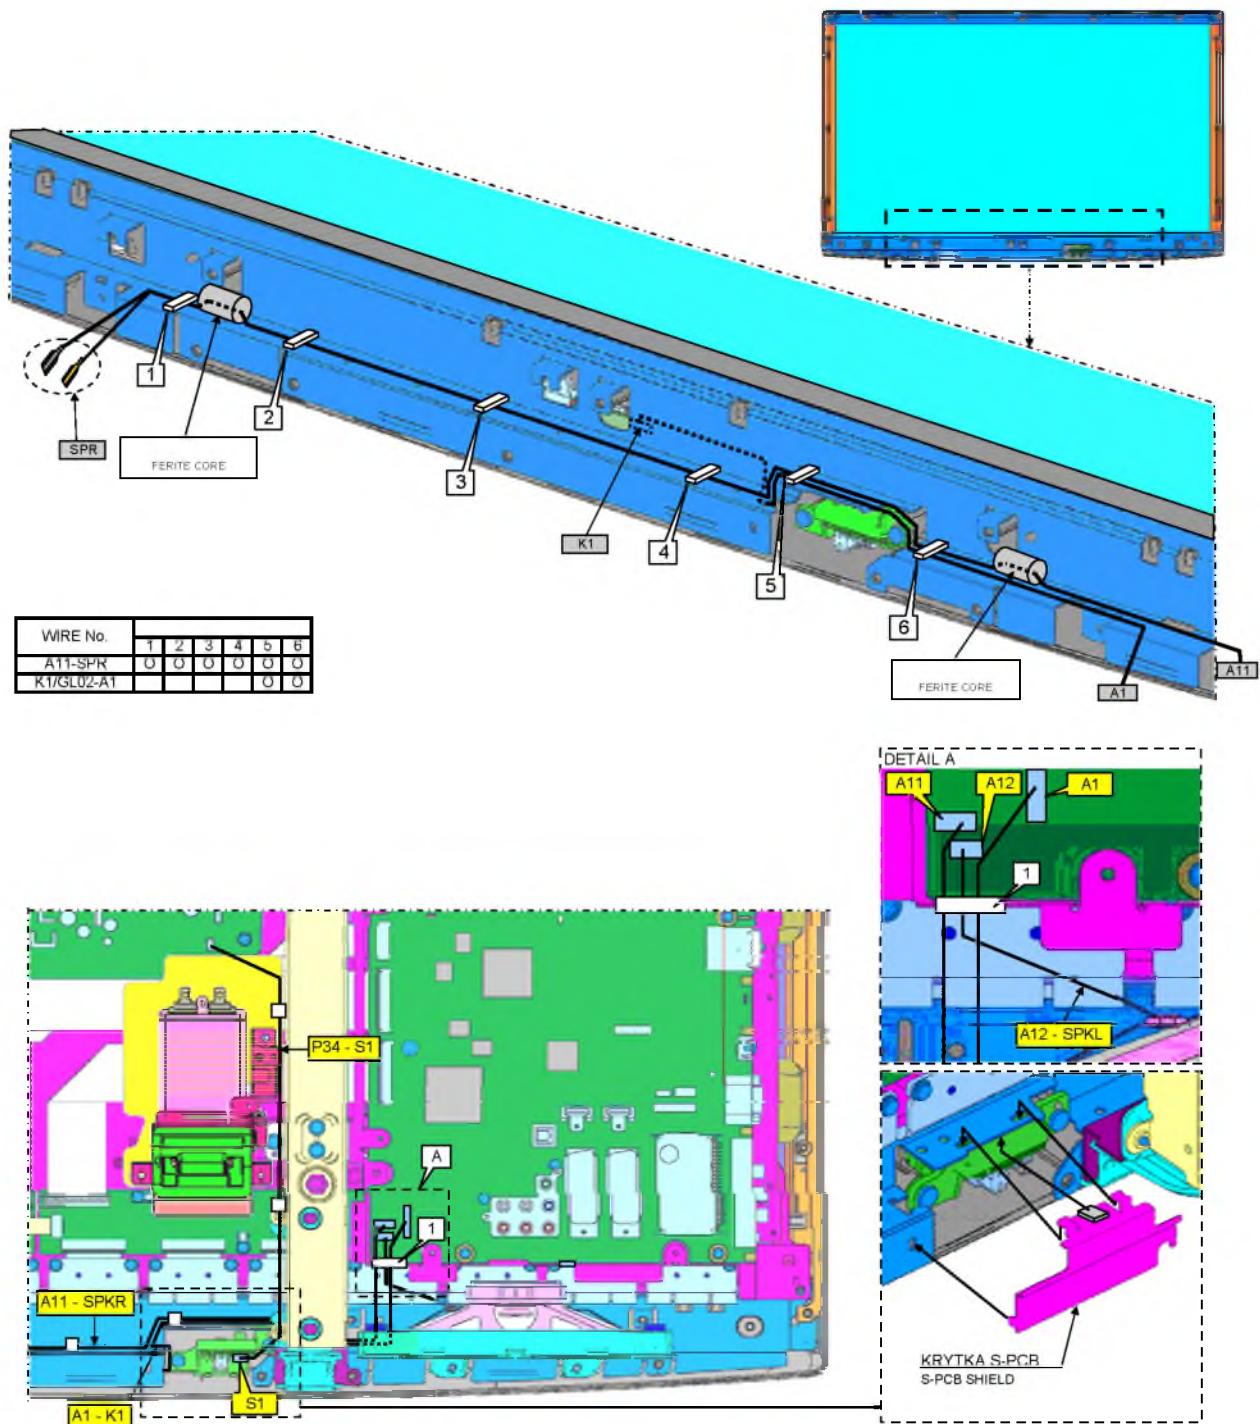


10.3. Wiring (2)


WIRE No.	1	2	3	4	5	6	7	8	9	10
S1-P34								O	O	O
A8-FAN	O	O	O	O	O	O	O			

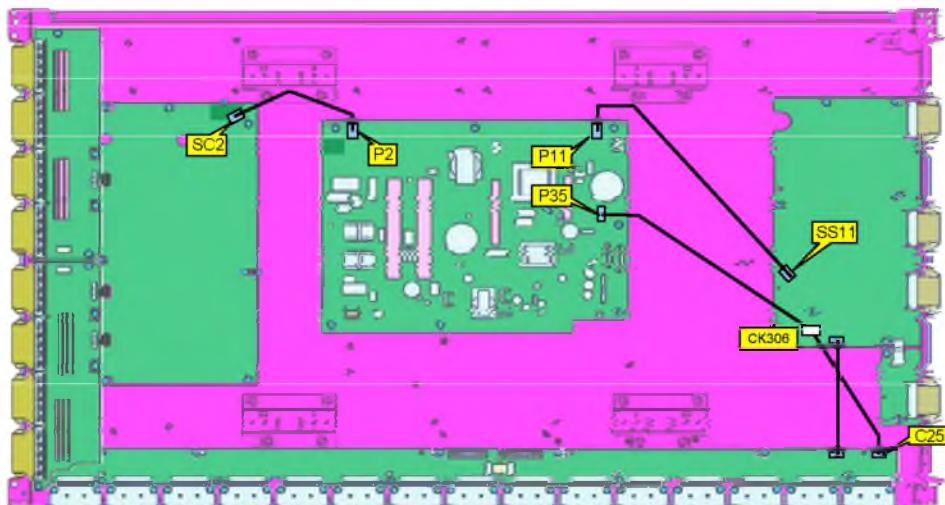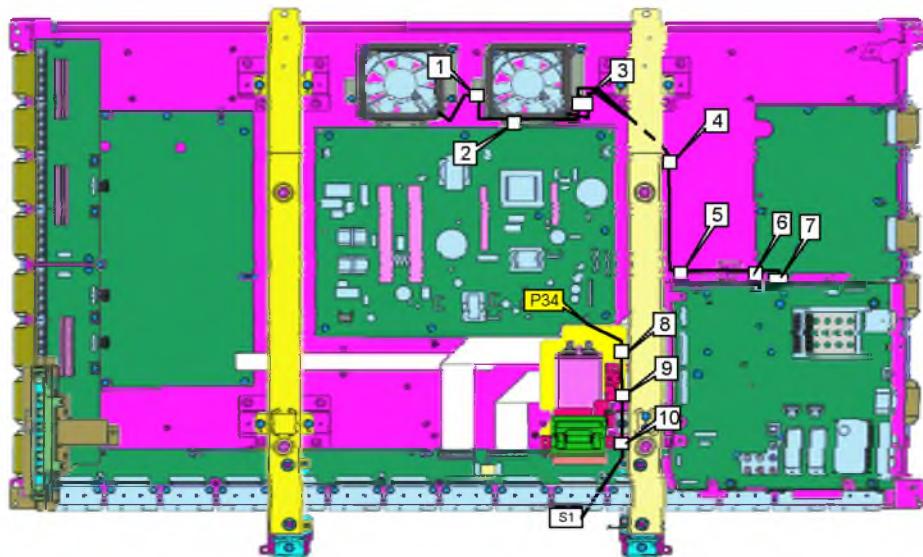

10.4. Wiring (3)

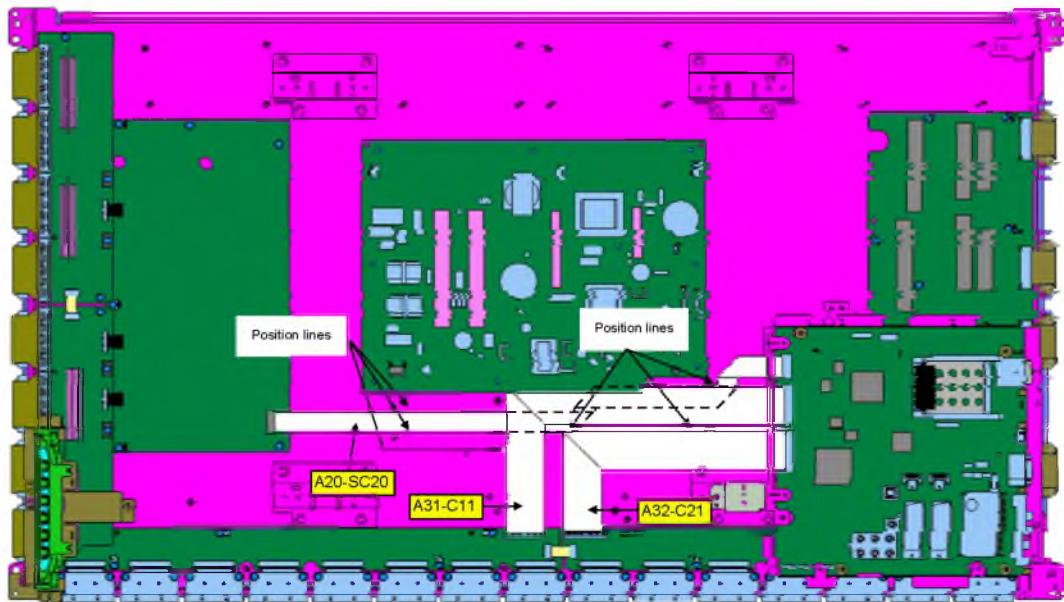

WIRE No.	1	2	3	4	5	6
P25-A25			O	O		
P6//A/	O	O	O			
P9-AC INLET					O	O
C14-GK1						

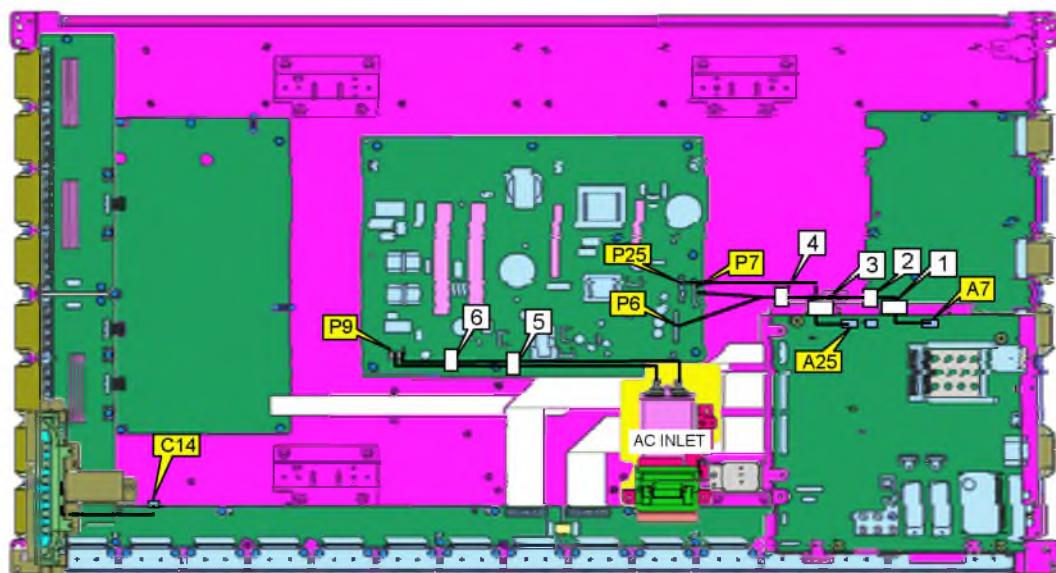

11 Schematic Diagram

11.1. Schematic Diagram Note

Notes:

1. Resistor

Unit of resistance is OHM [Ω] ($K=1,000$, $M=1,000,000$).

2. Capacitor

Unit of capacitance is μF , unless otherwise noted.

3. Coil

Unit of inductance is H, unless otherwise noted.

4. Test Point

 : Test Point position

5. Earth Symbol

 : Chassis Earth (Cold)



: Line Earth (Hot)

6. Voltage Measurement

Voltage is measured by a DC voltmeter.

Conditions of the measurement are the following:

Power Source AC220-240V, 50/60Hz

Receiving Signal Colour Bar signal (RF)

All customer's controls Maximum positions

7. When arrow mark () is found, connection is easily found from the direction of arrow.
8. Indicates the major signal flow. : Video \rightarrow Audio \Rightarrow
9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.


The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.

All circuits, except the Power Circuit, are cold.


Precautions

- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.


11.2. P-Board (1/2) Schematic Diagram

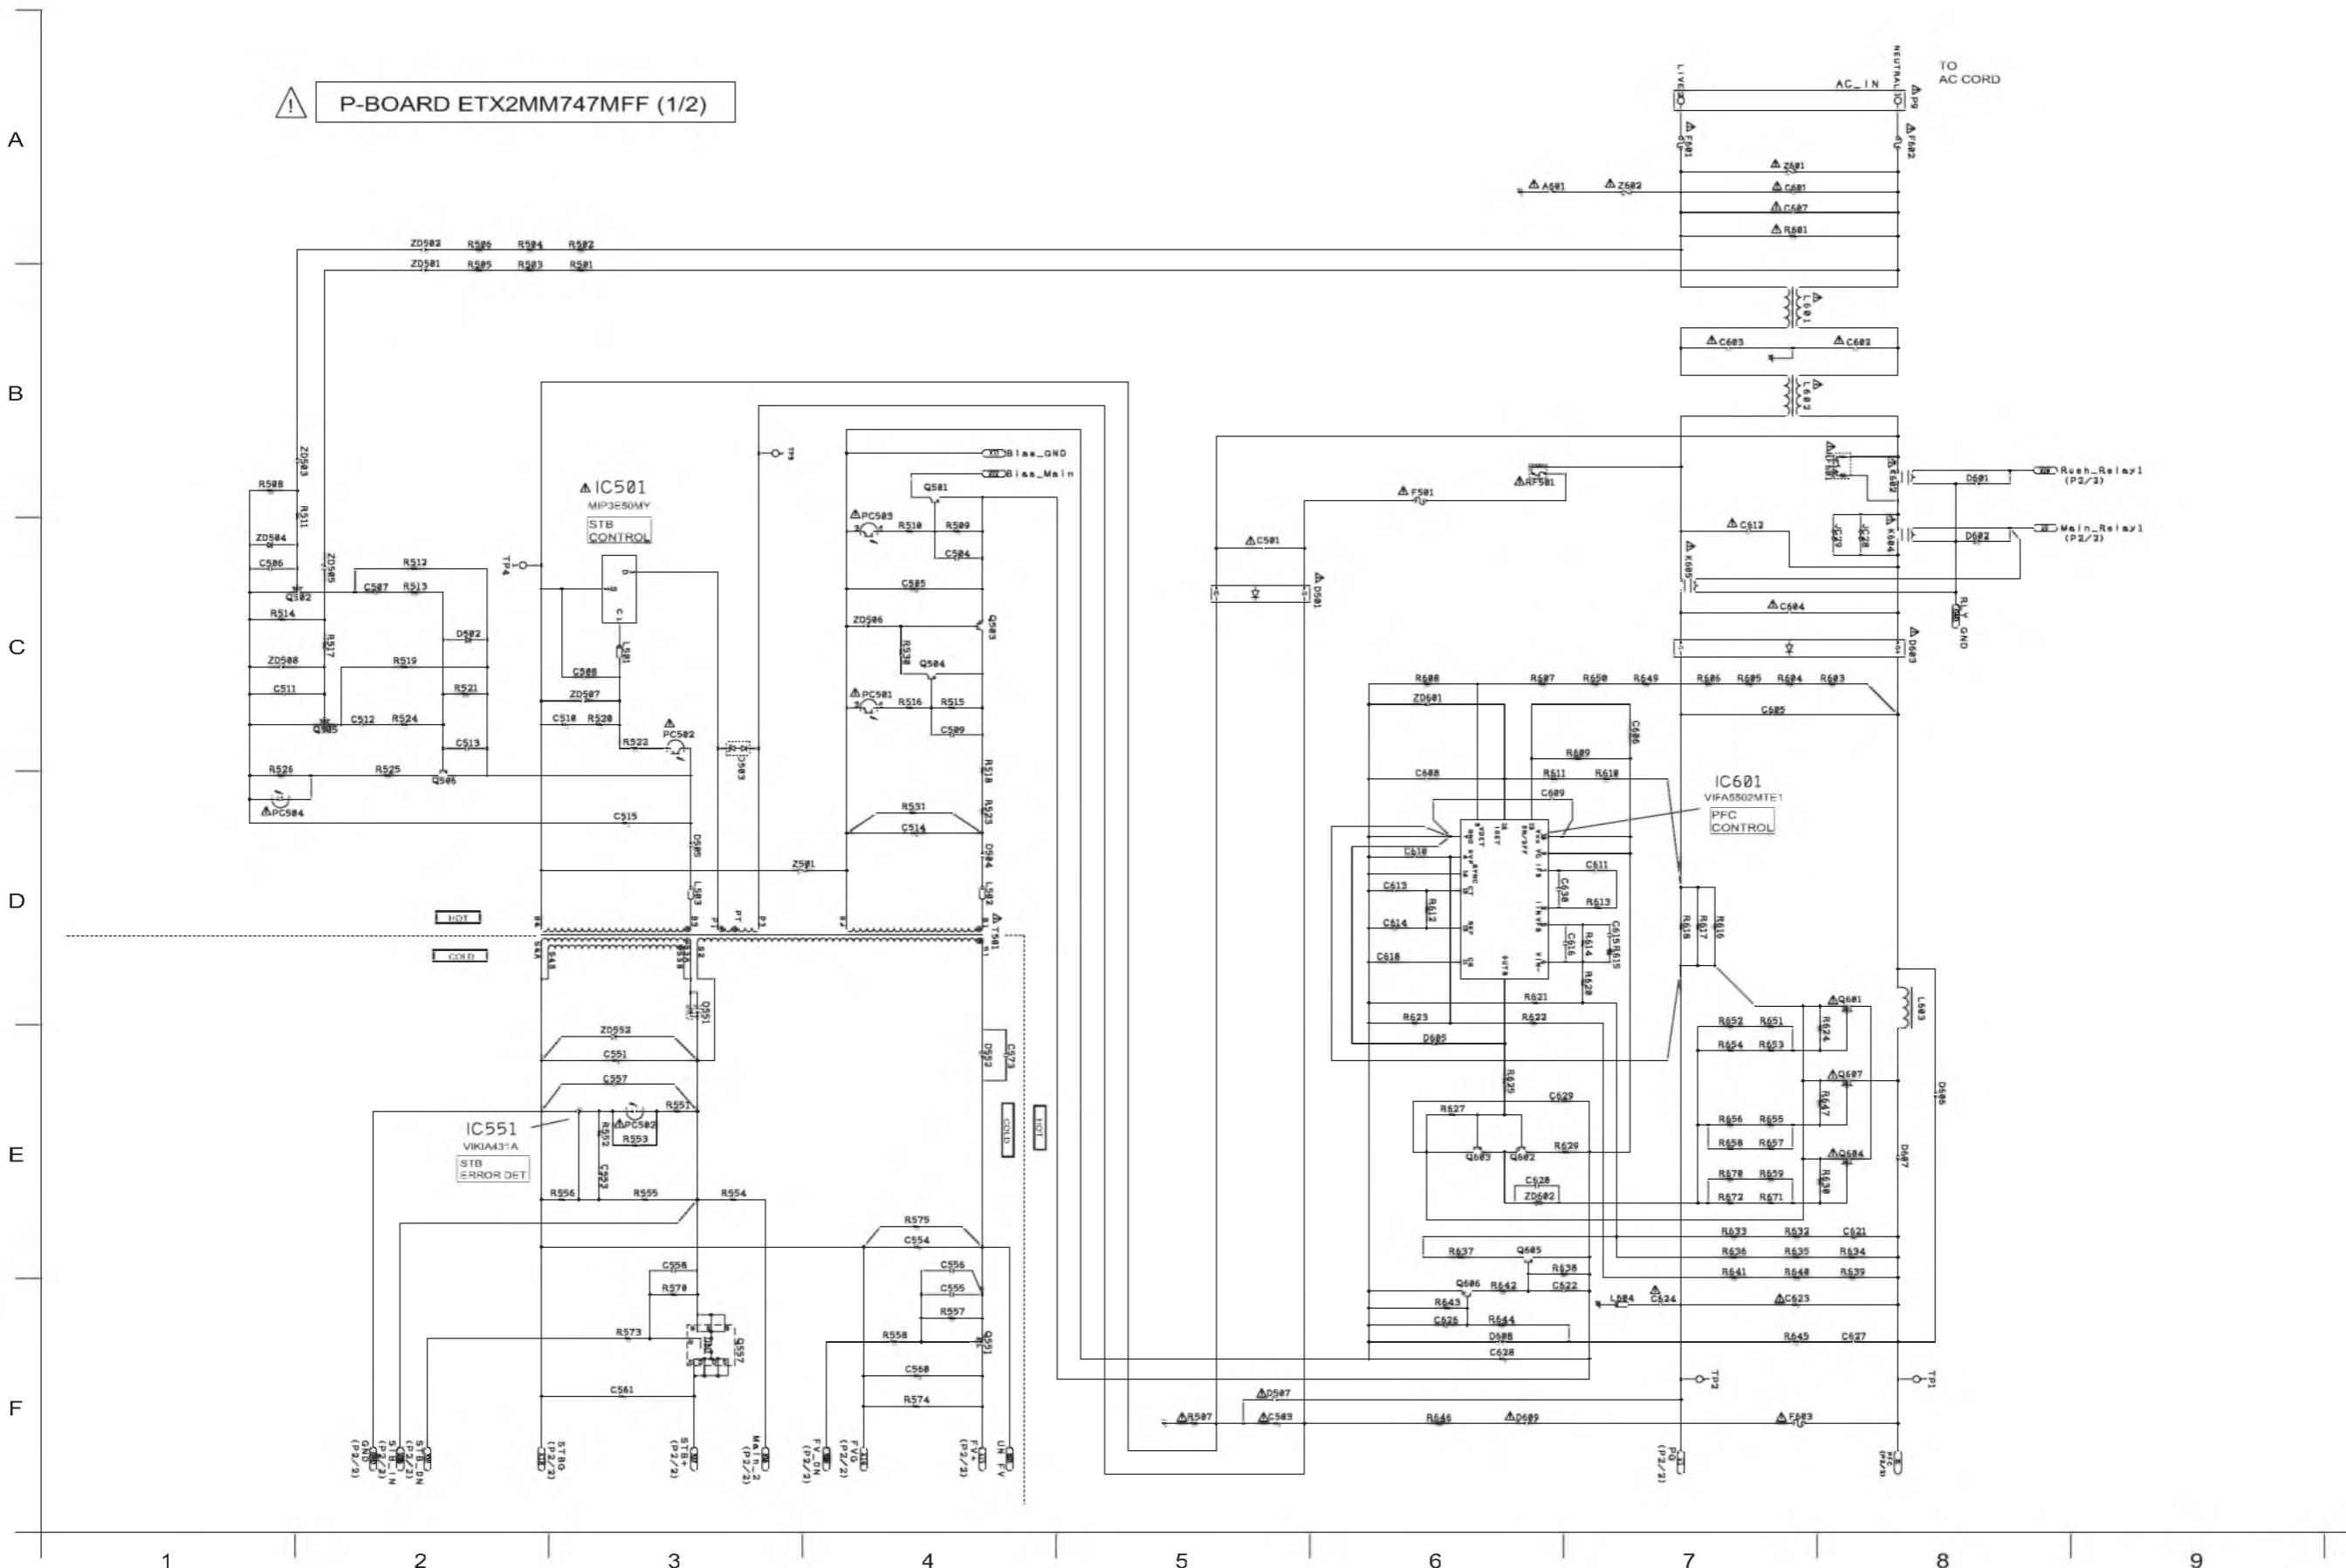


11.3. P-Board (2/2) Schematic Diagram

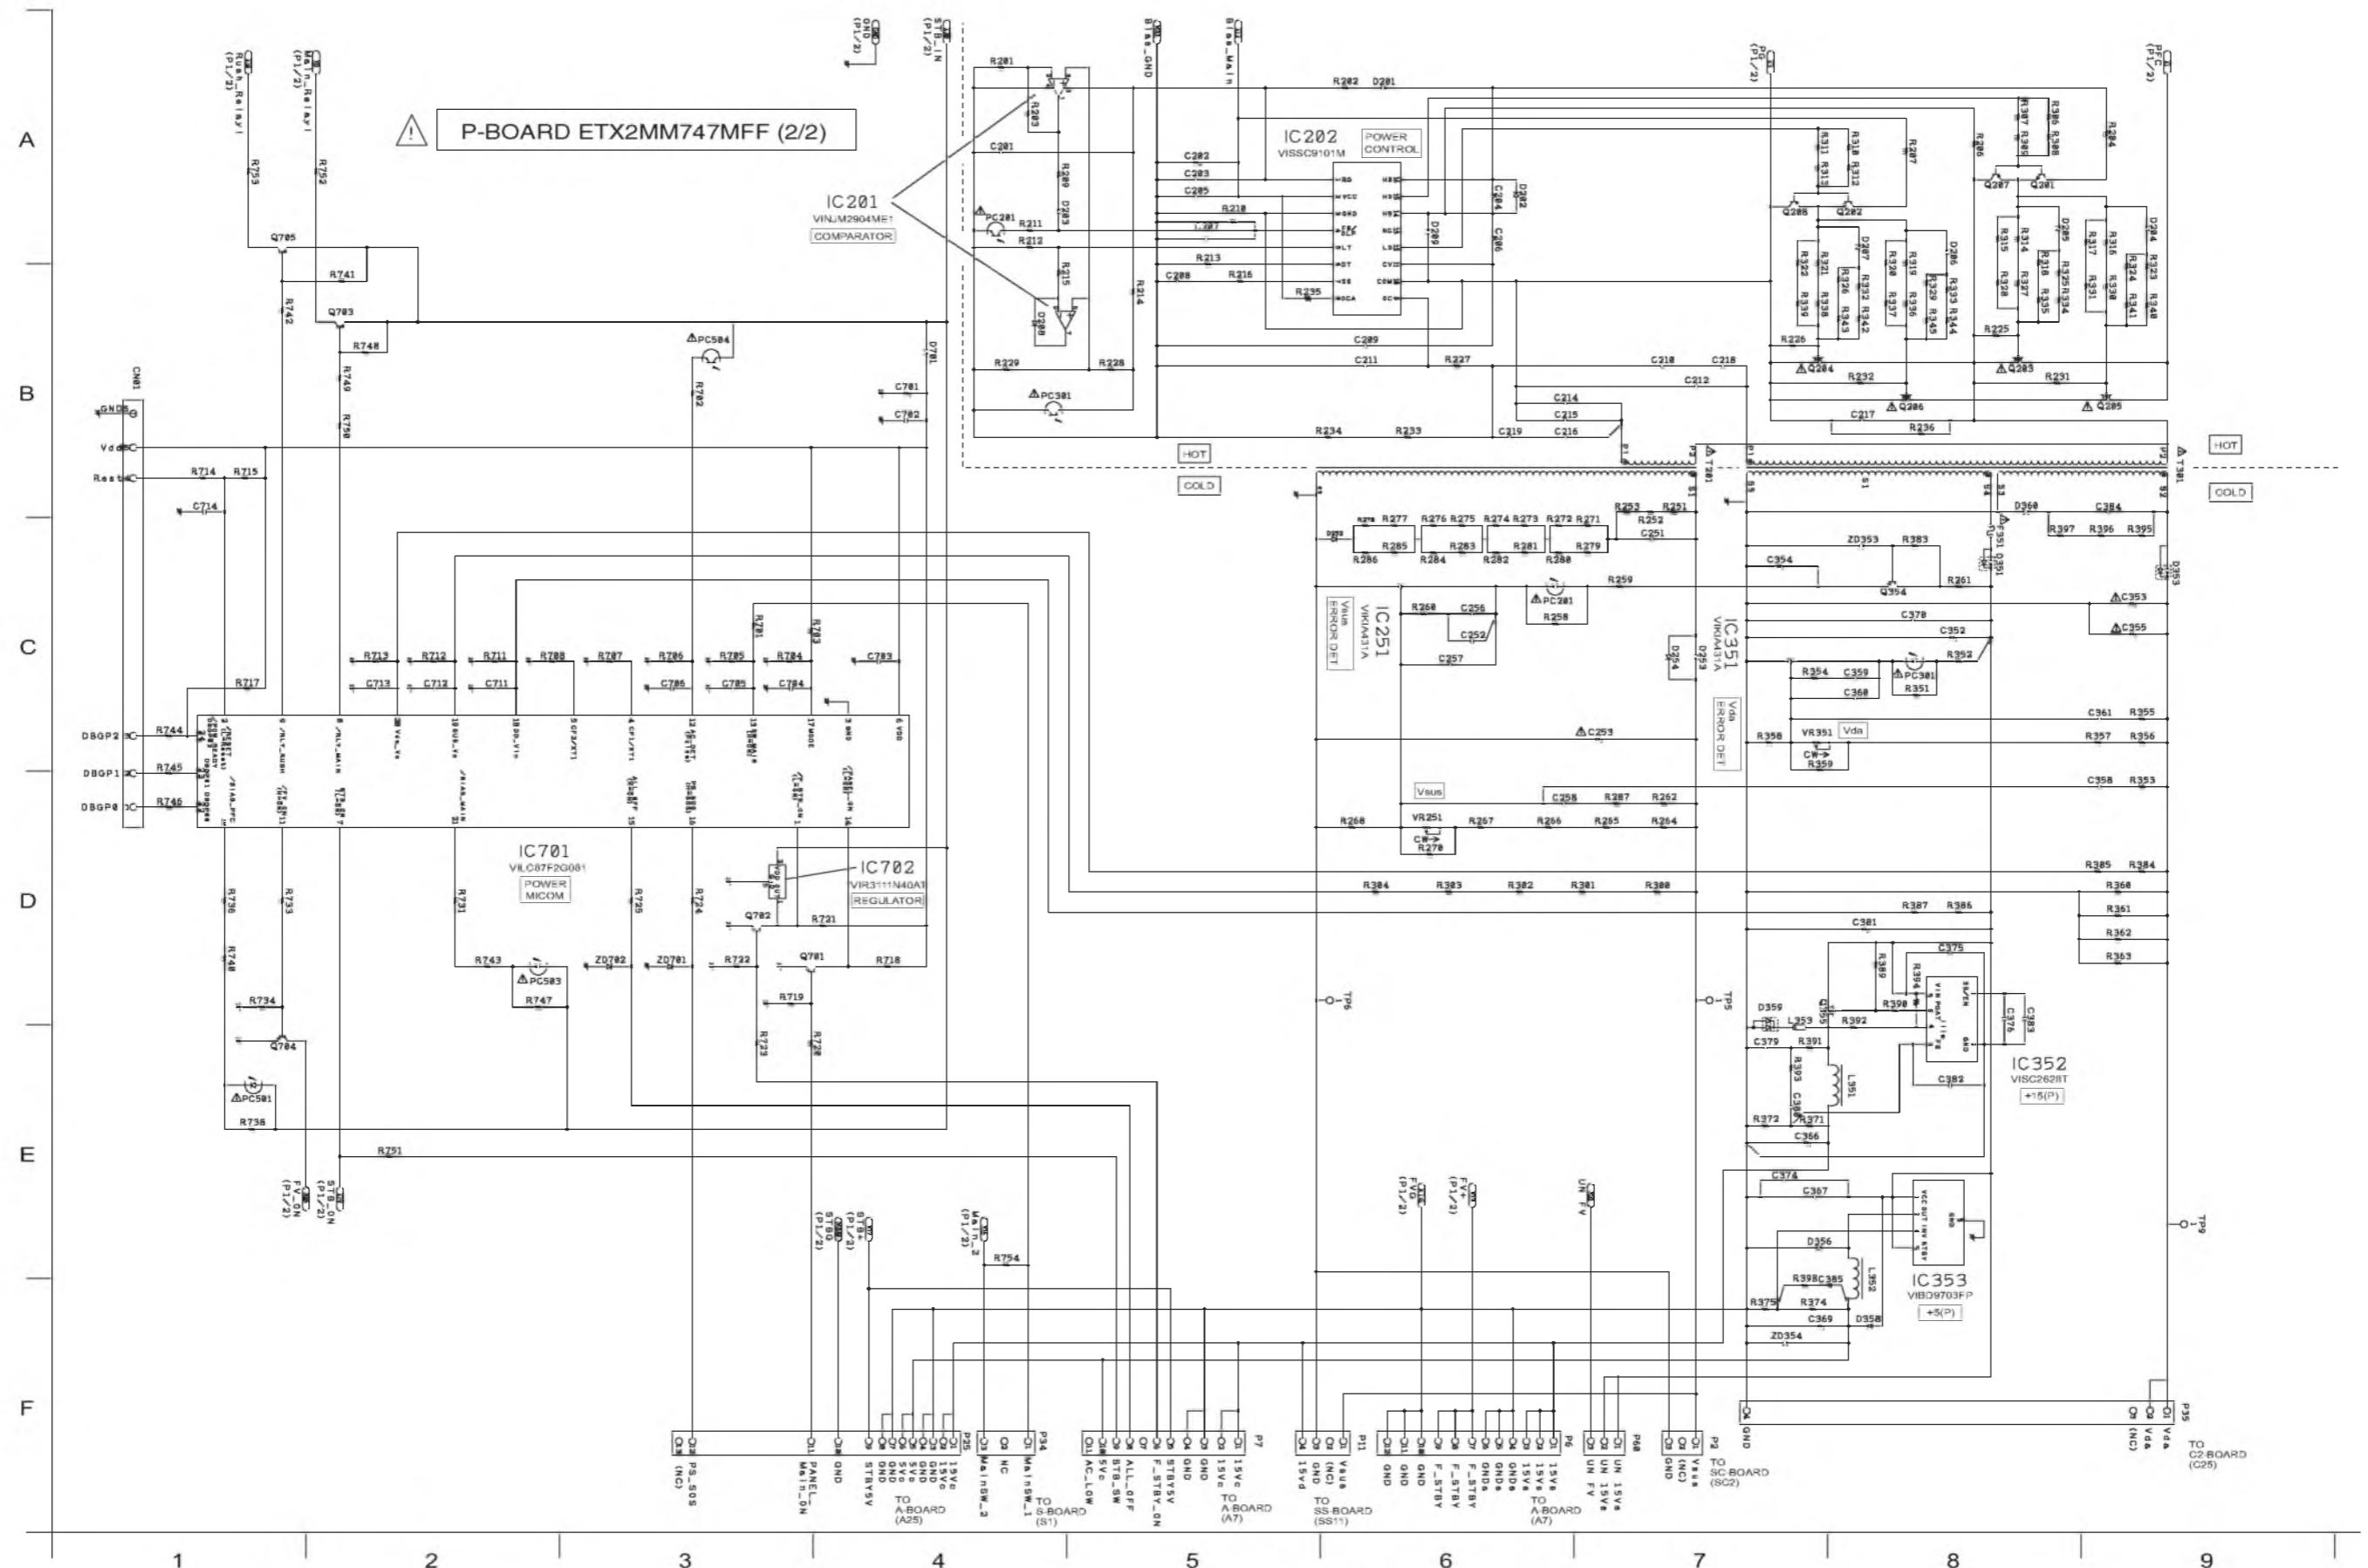


11.4. GK, GL, K and S-Board Schematic Diagram

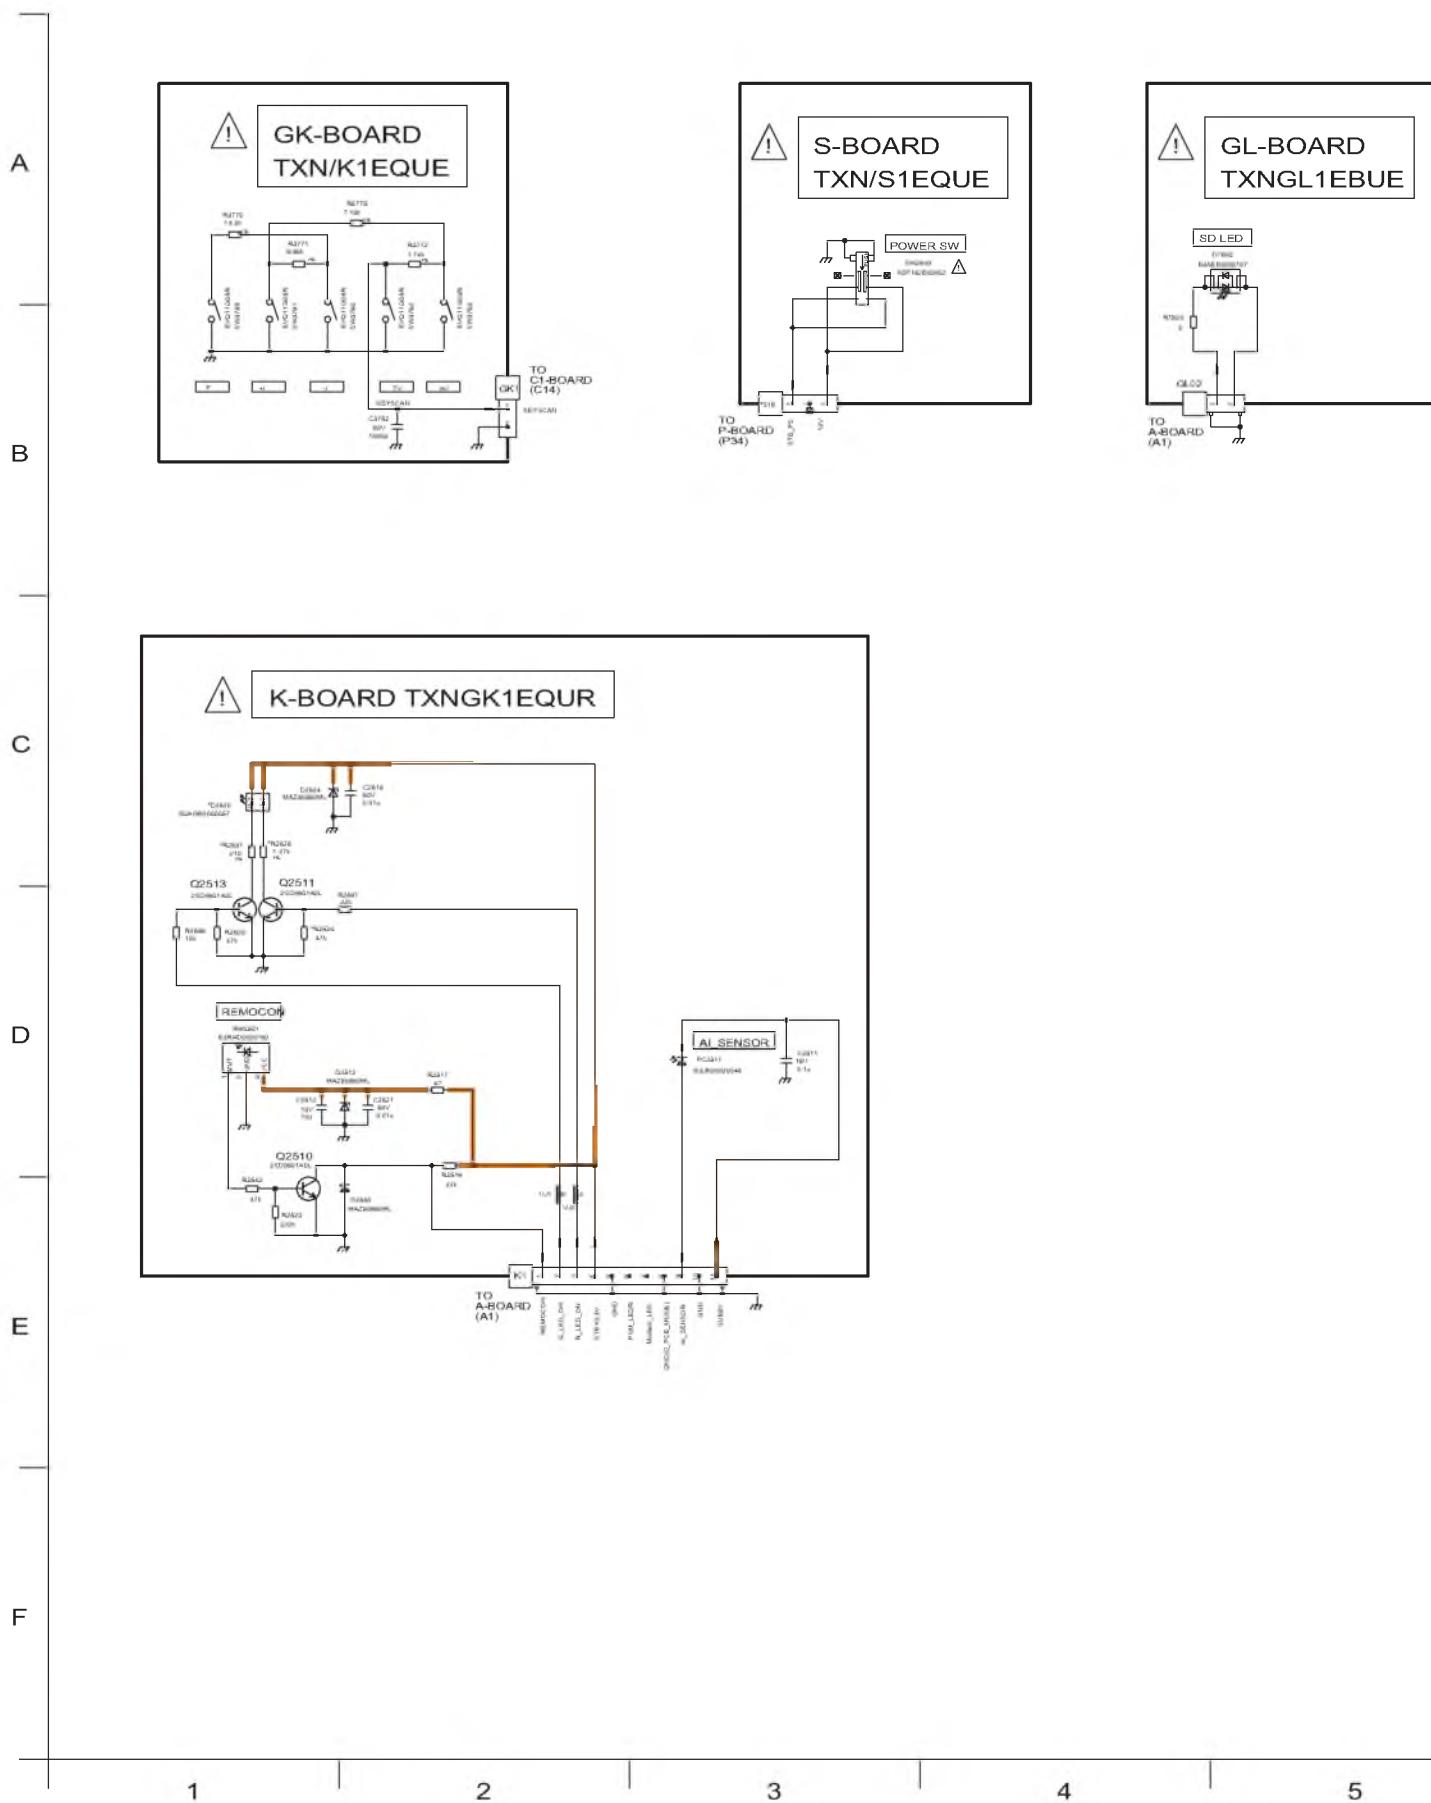


11.5. A-Board (1/20) Schematic Diagram

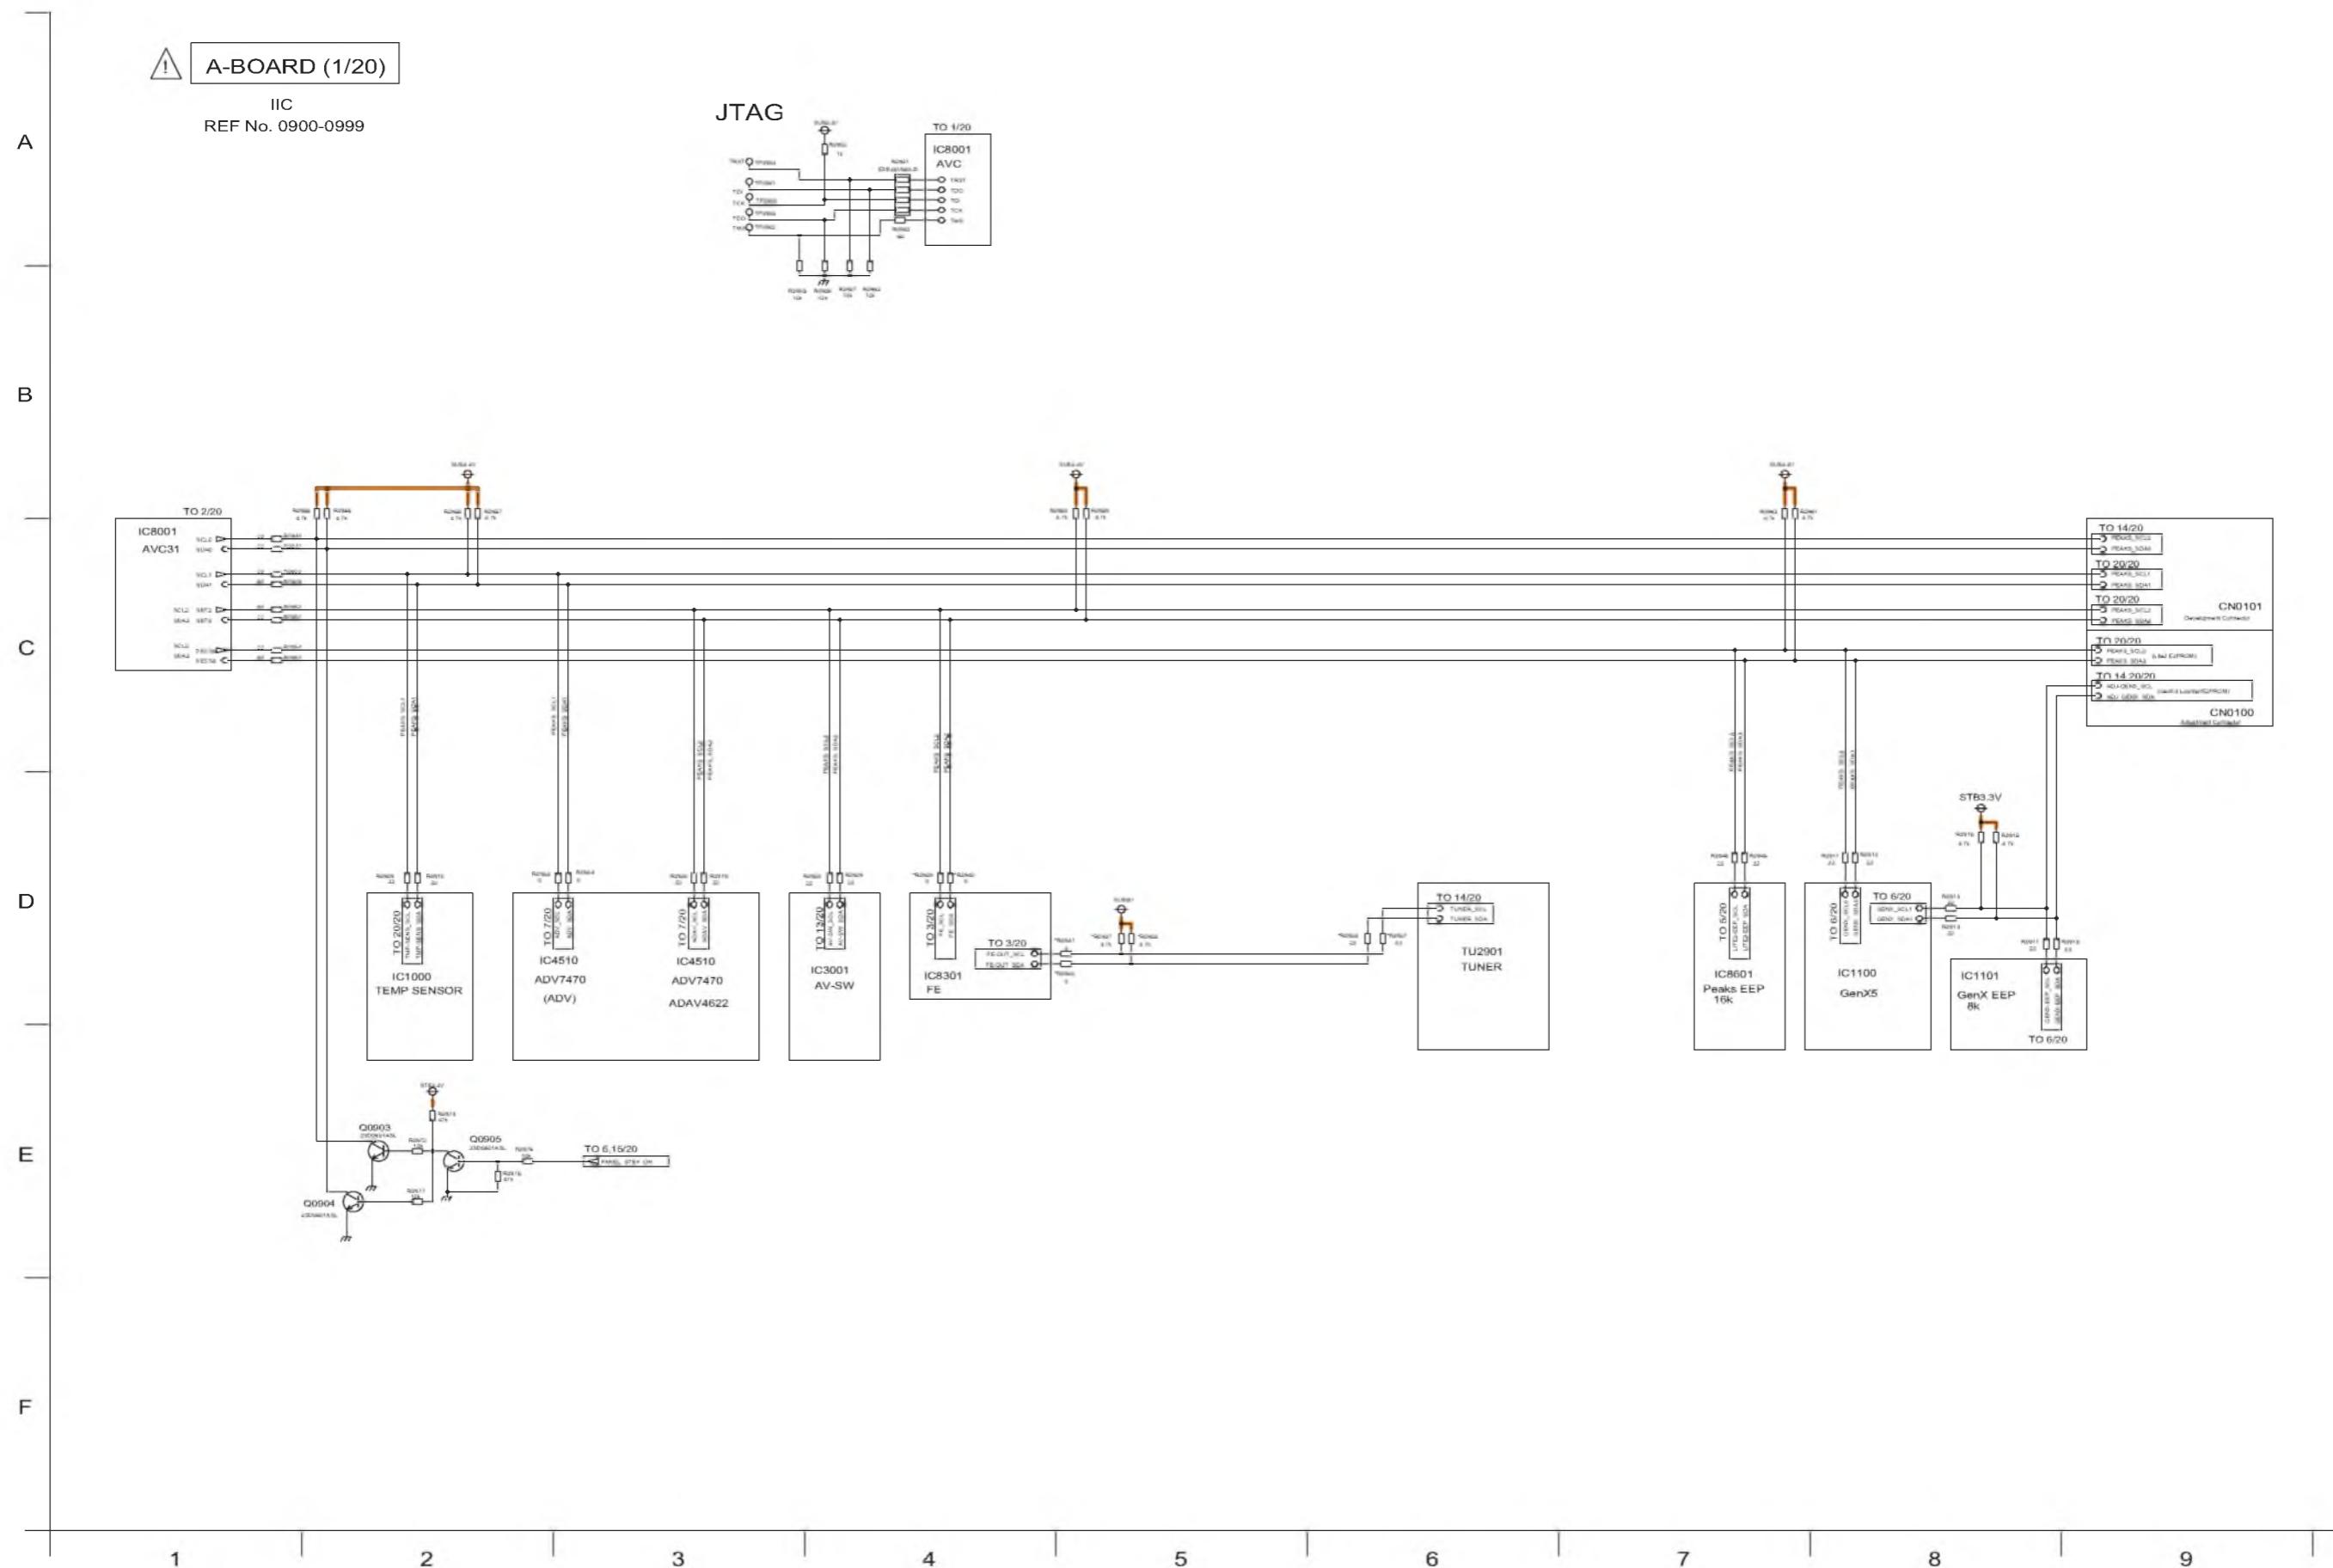

11.6. A-Board (2/20) Schematic Diagram

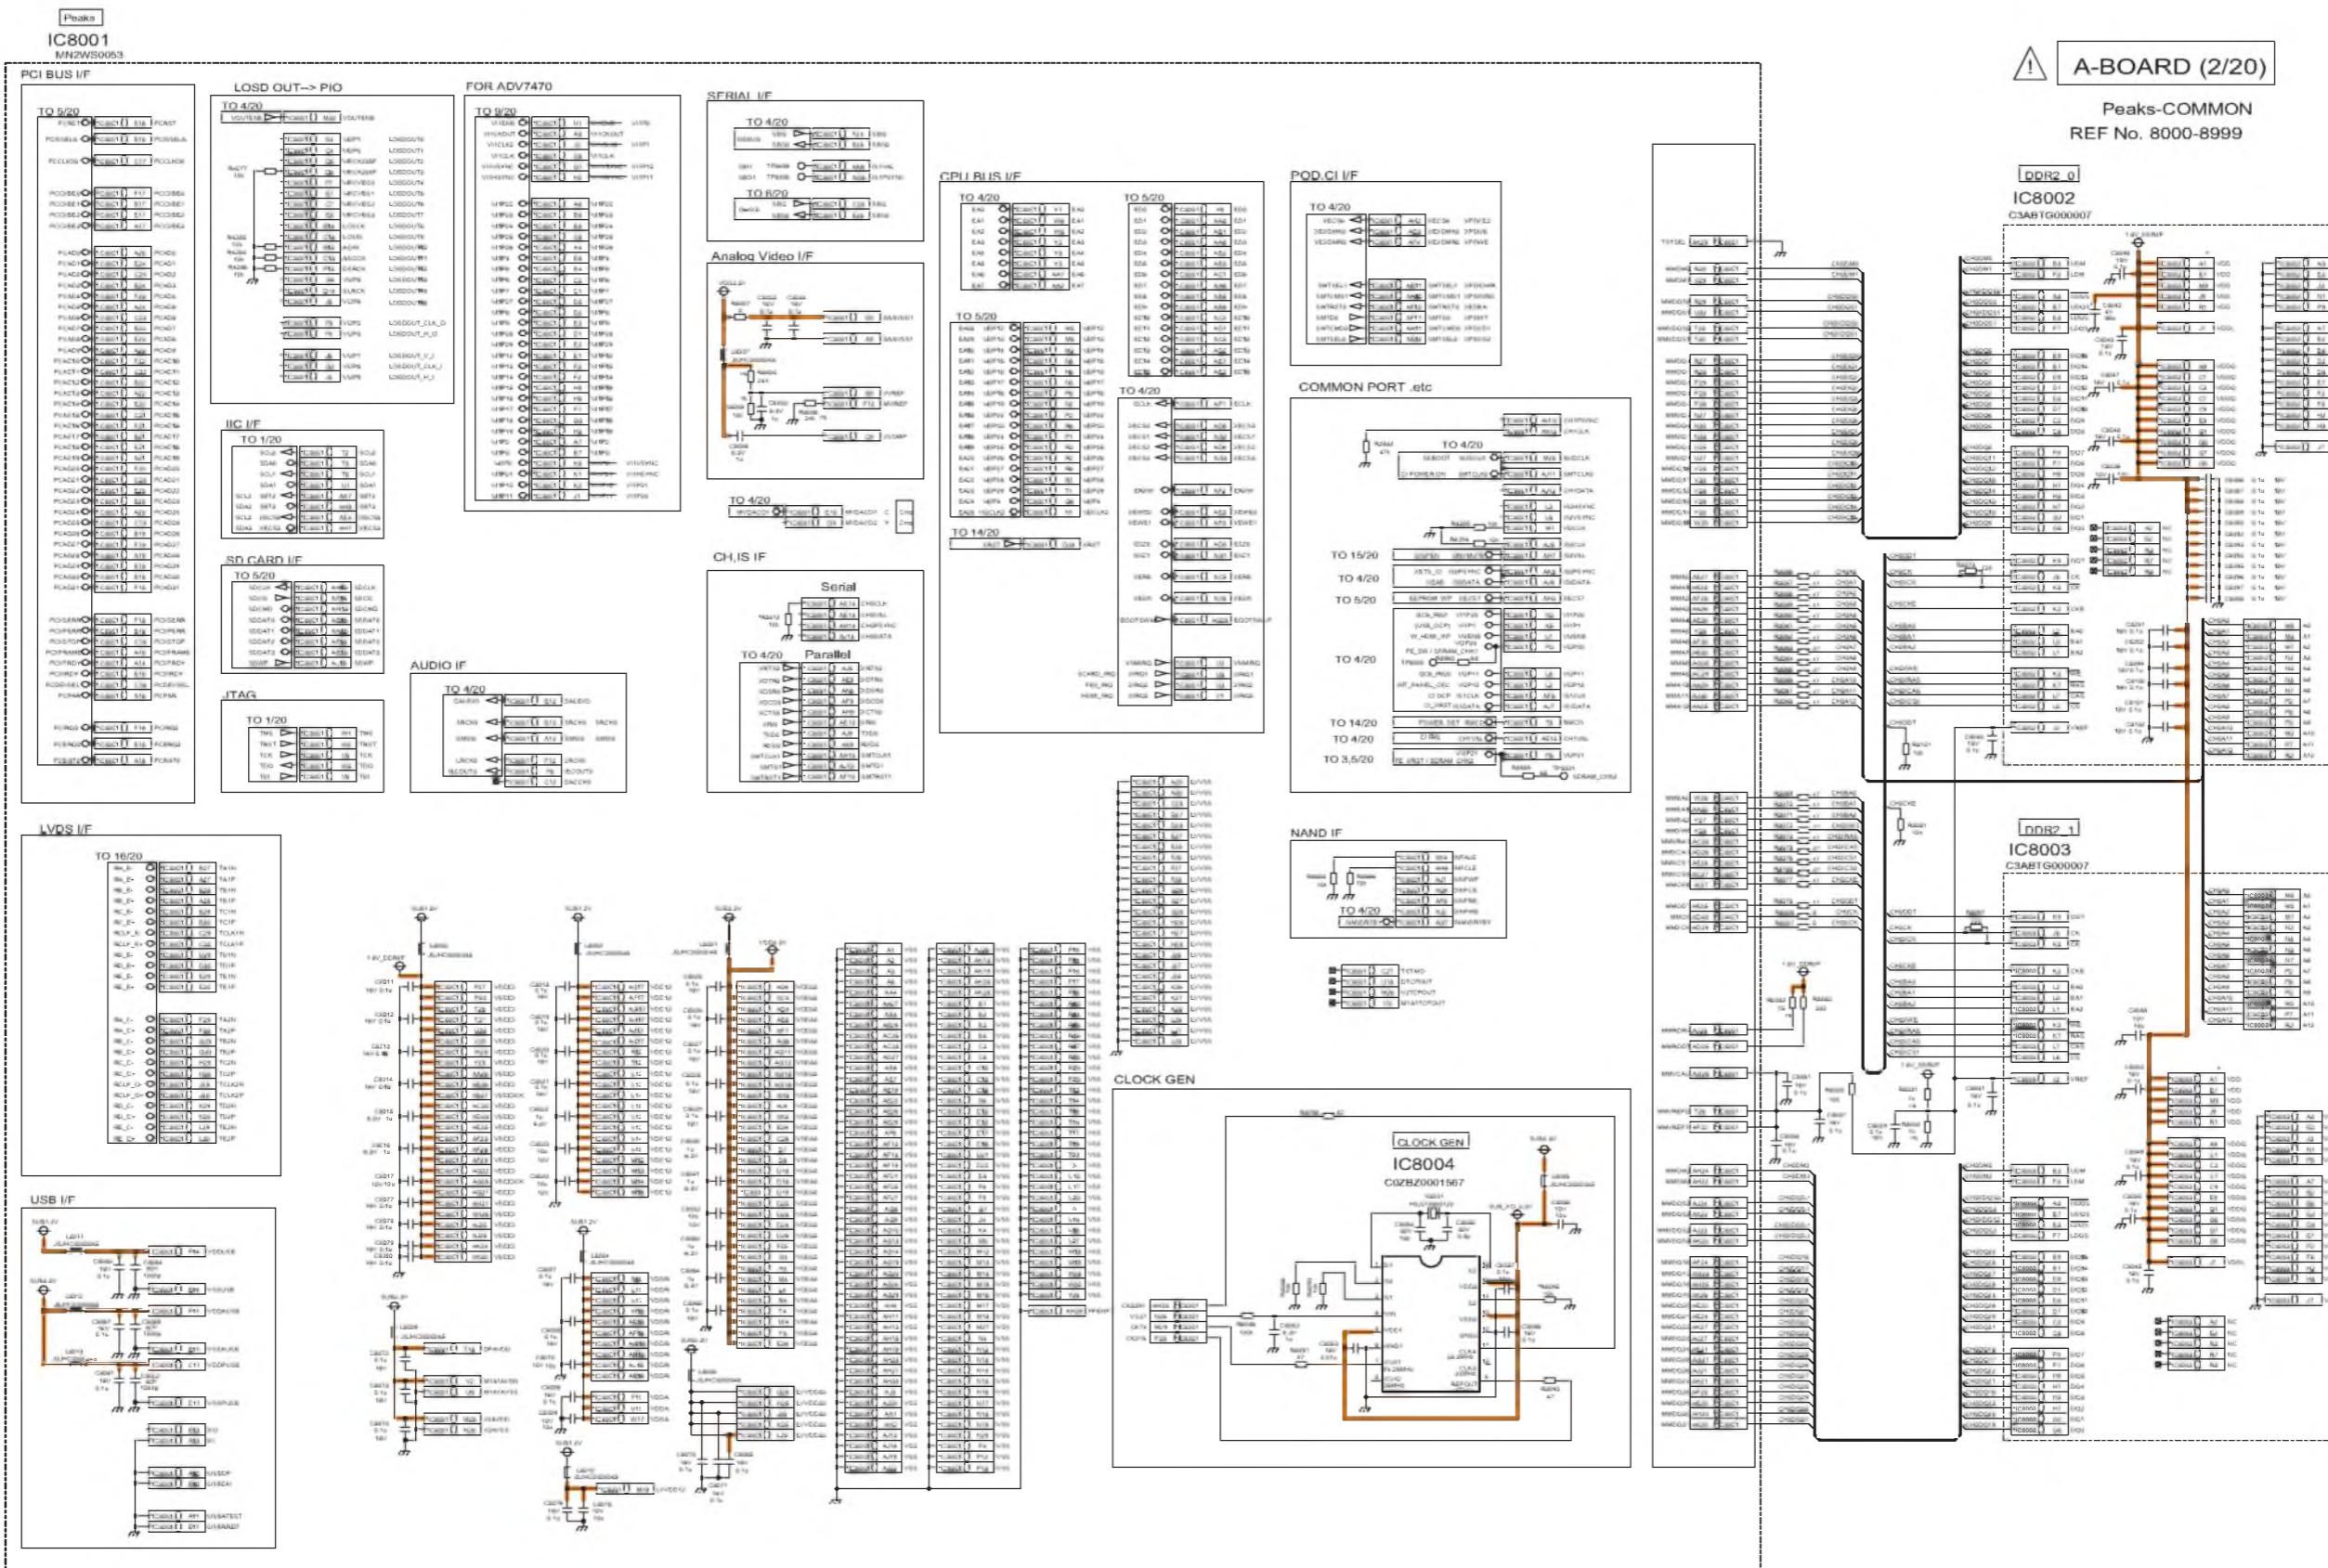

11.7. A-Board (3/20) Schematic Diagram

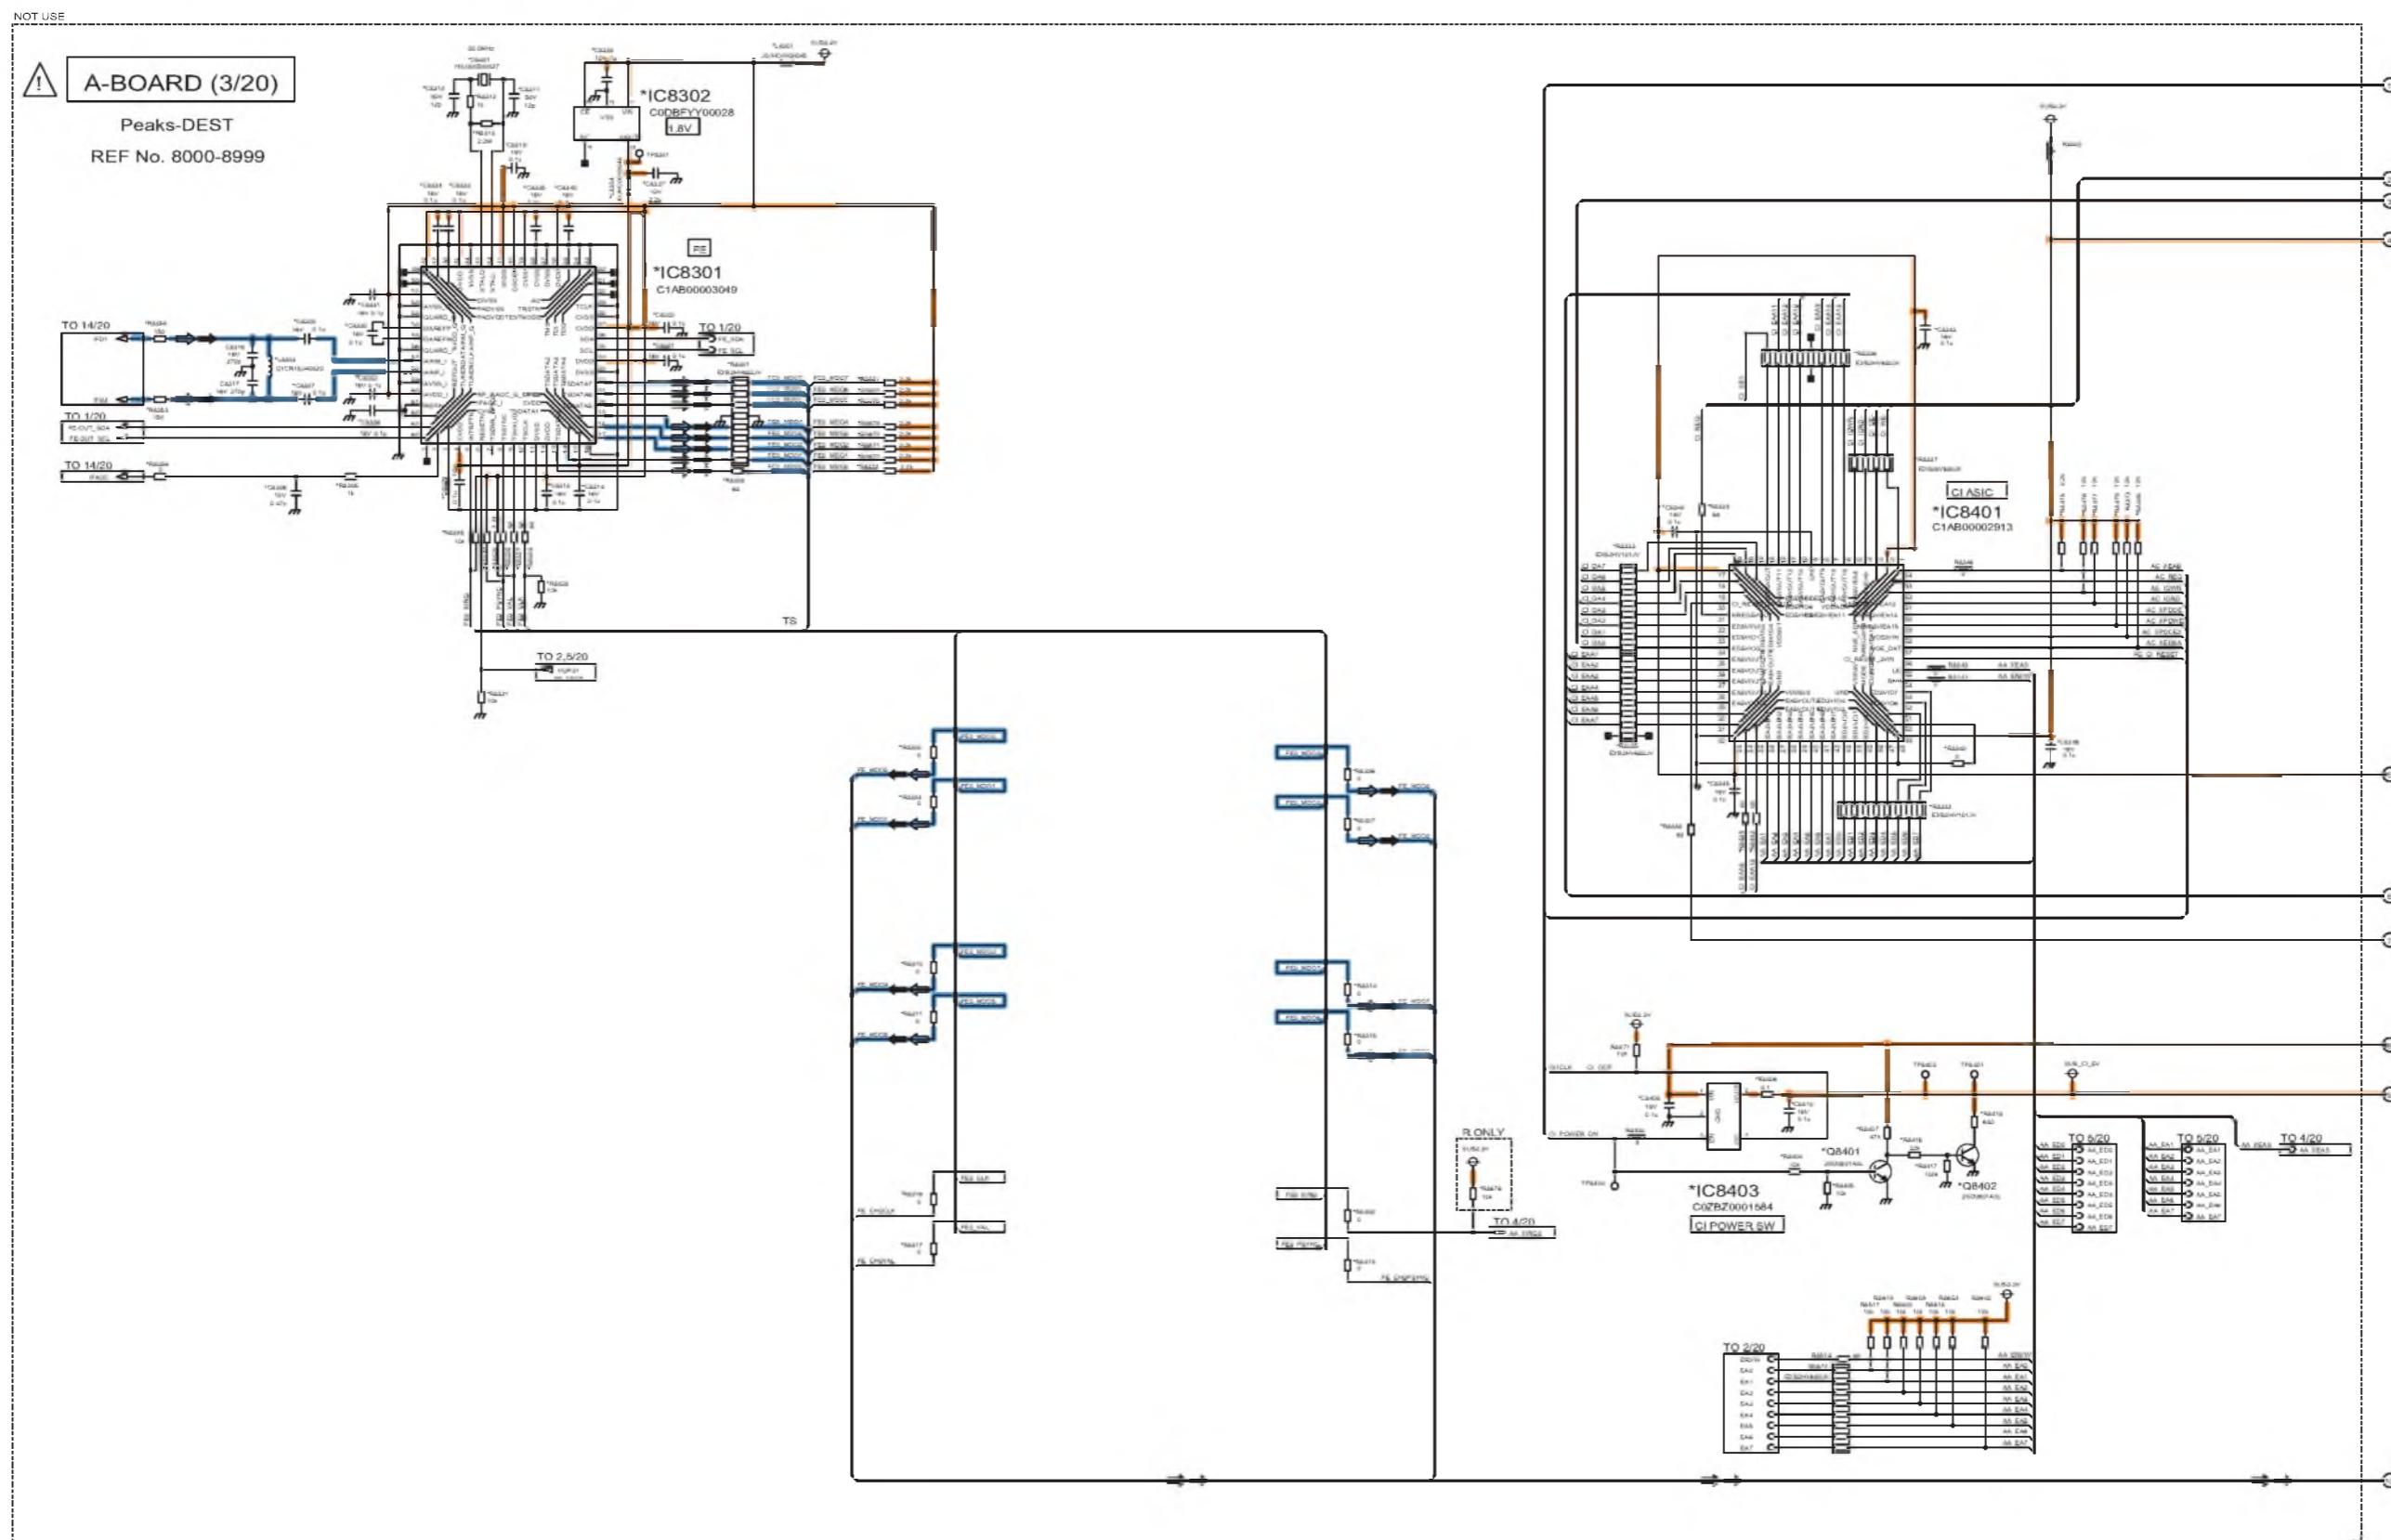

19

20

21

22

23


24

25

26

27

11.8. A-Board (4/20) Schematic Diagram

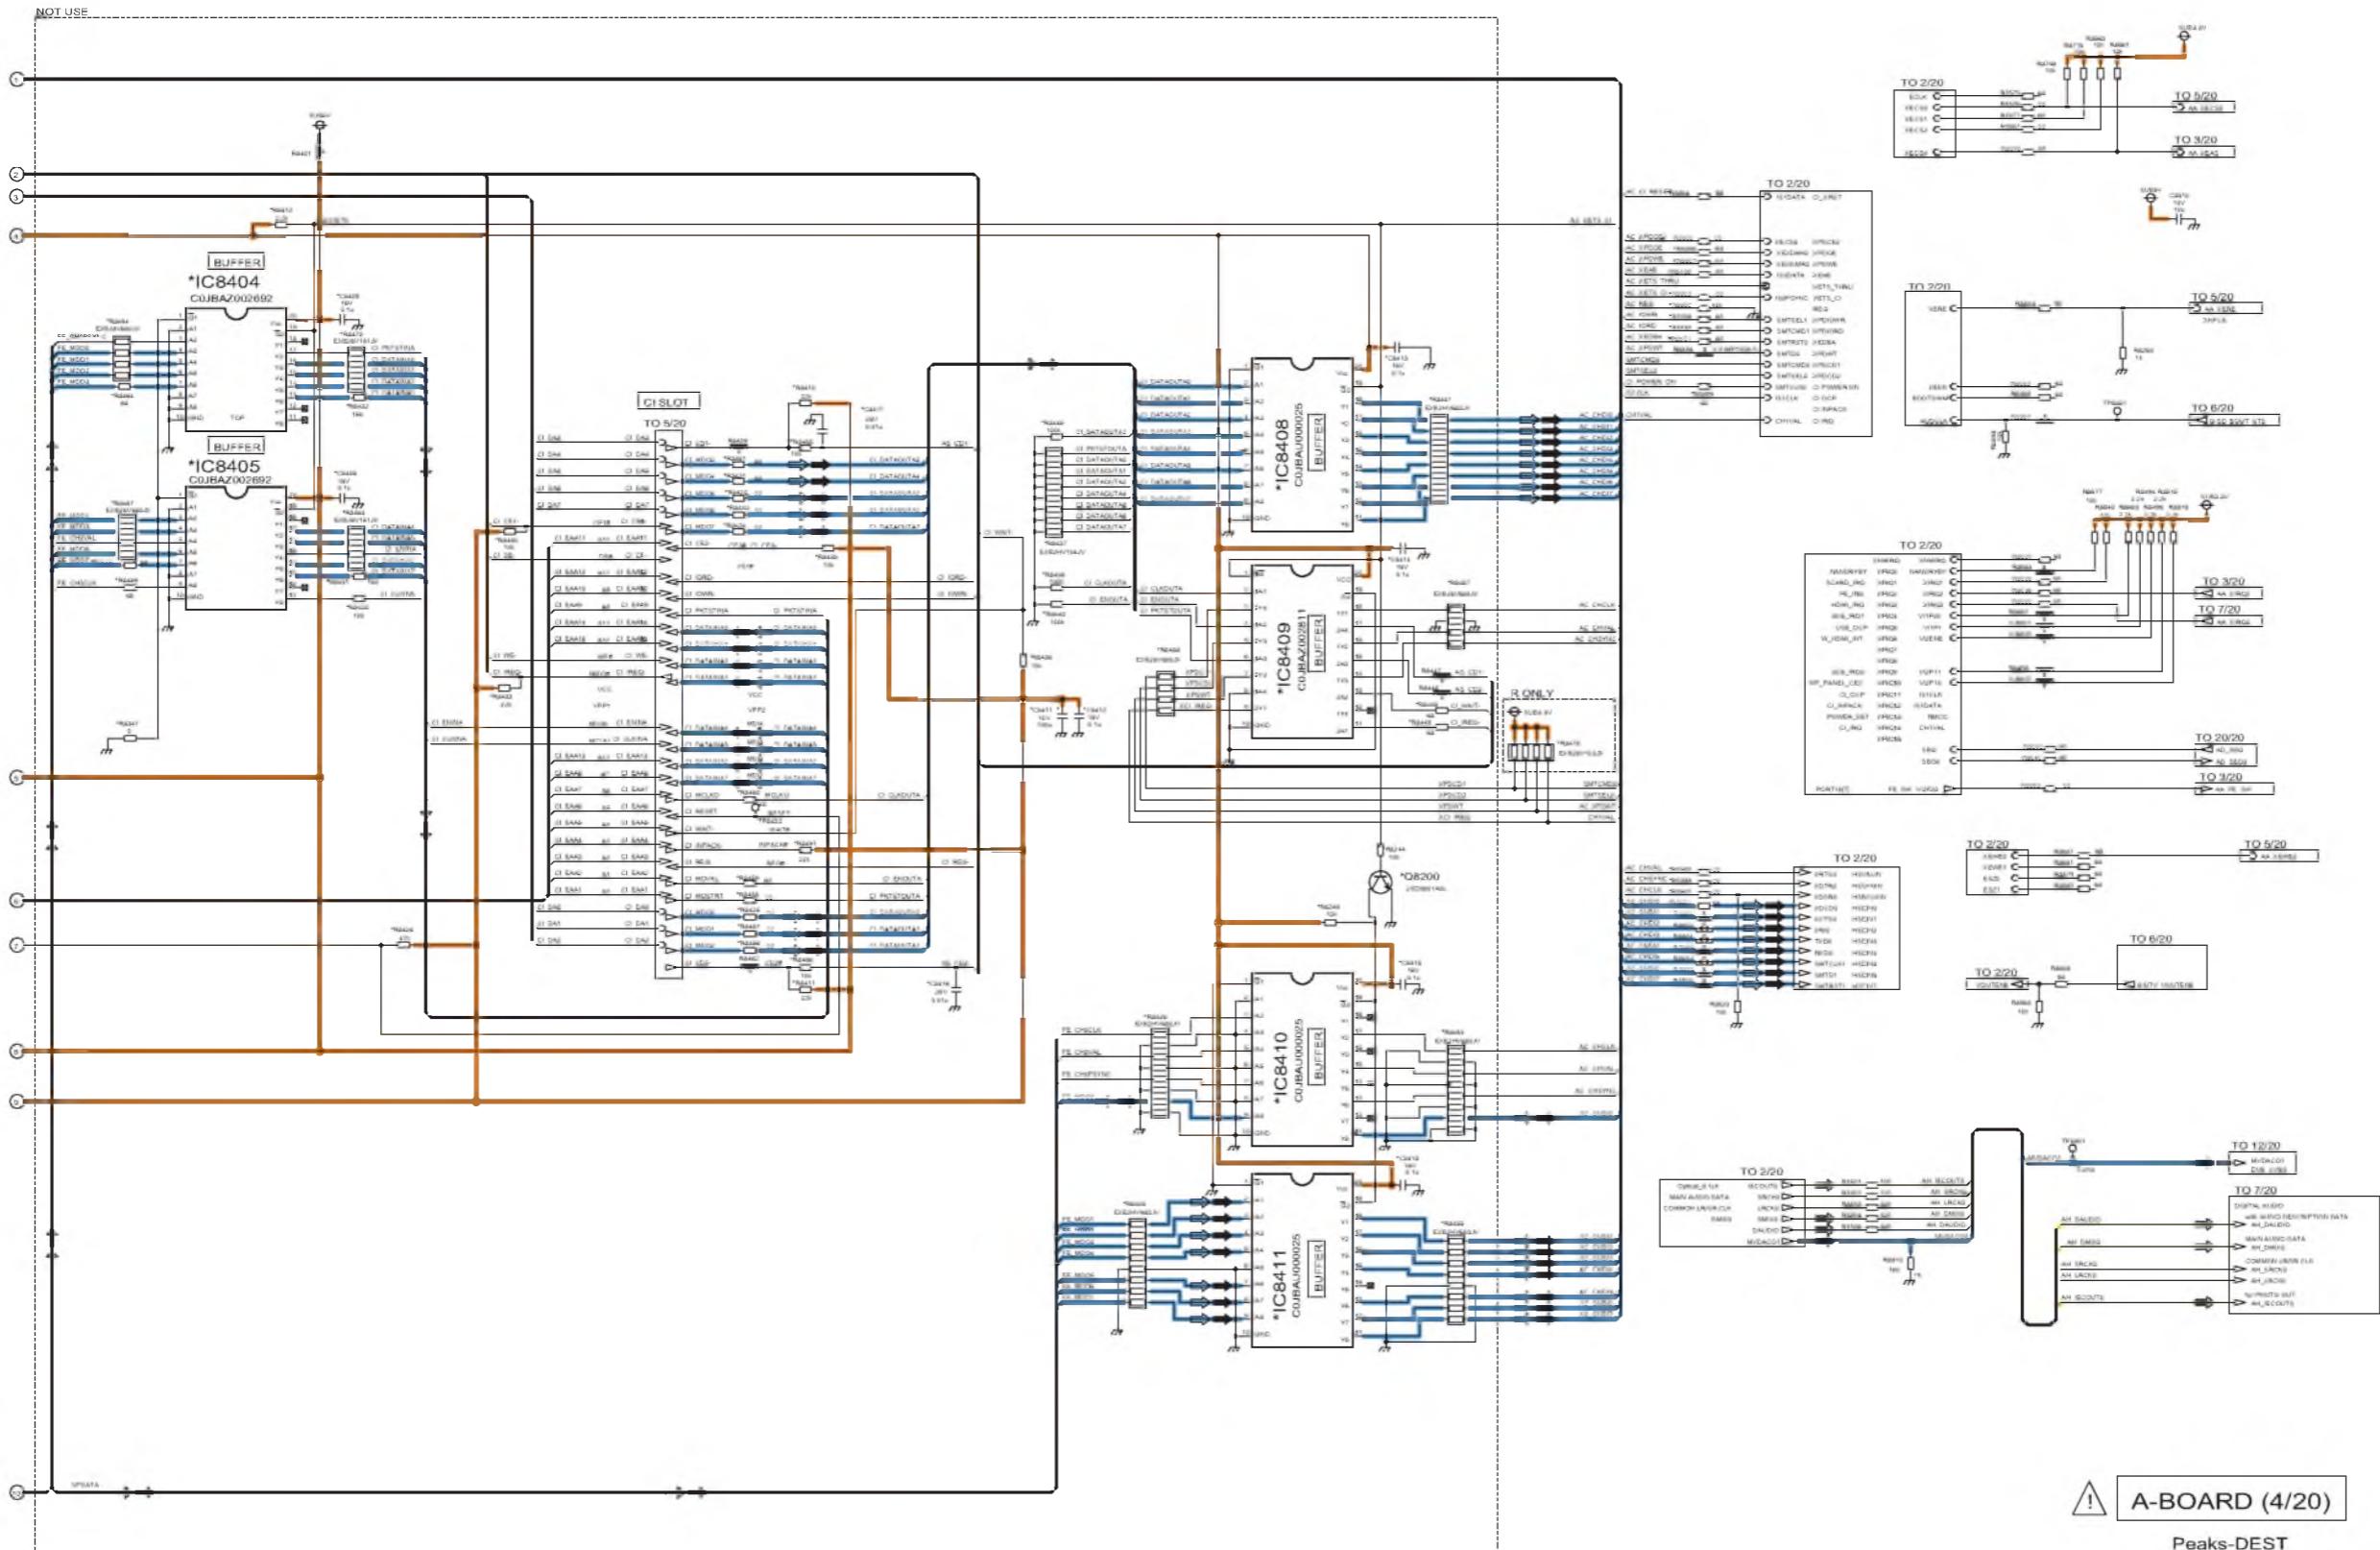



A-BOARD (4/20)

Peaks-DEST

REF No. 8000-8999






11.9. A-Board (5/20) Schematic Diagram

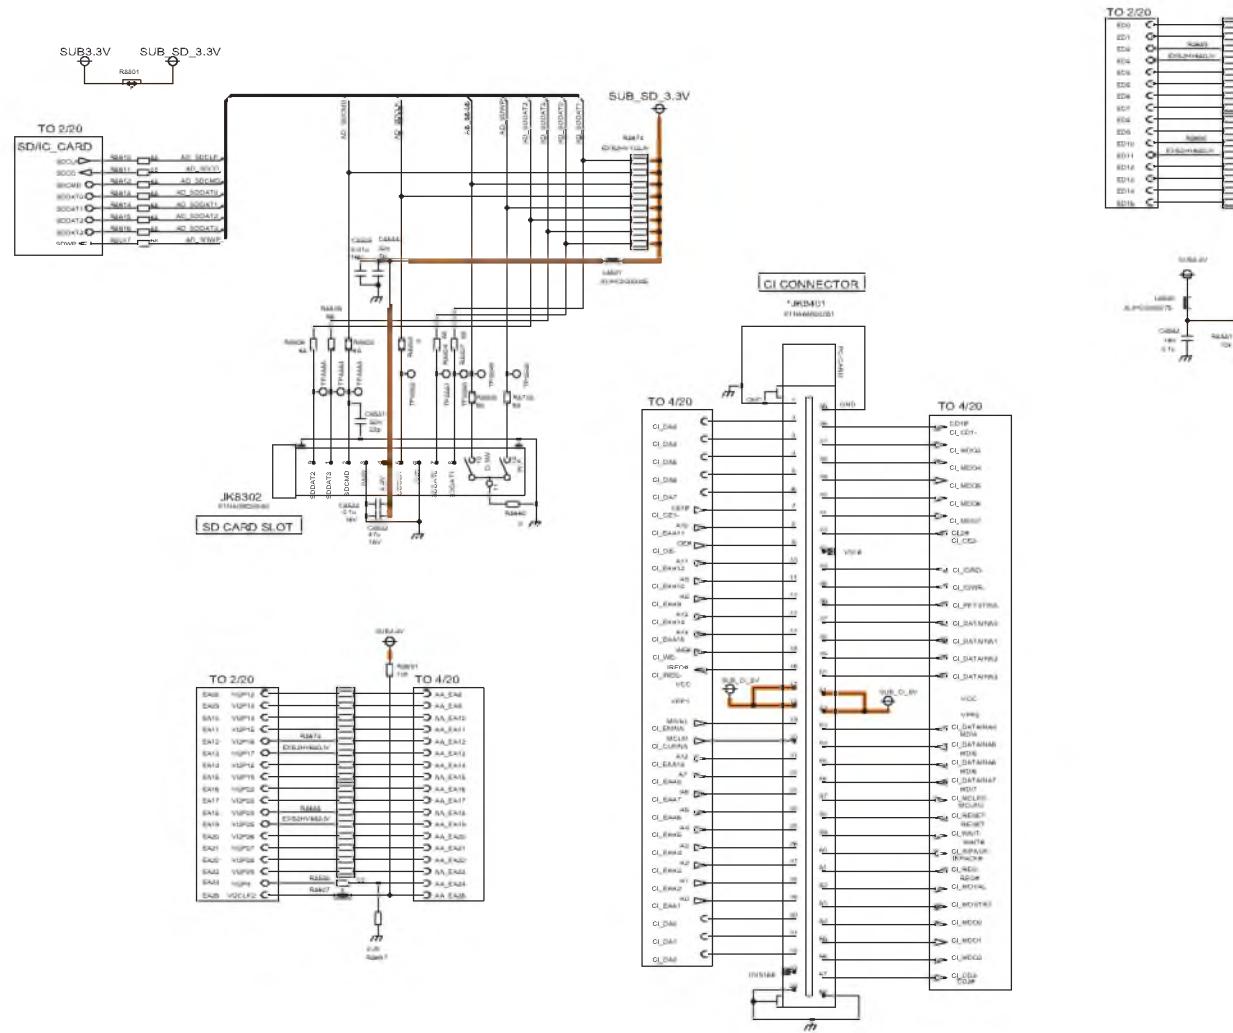

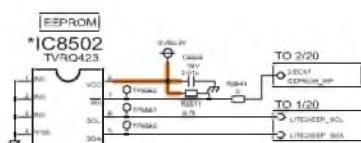

A-BOARD (5/20)

Peaks-MODEL
REF No. 8000-8999

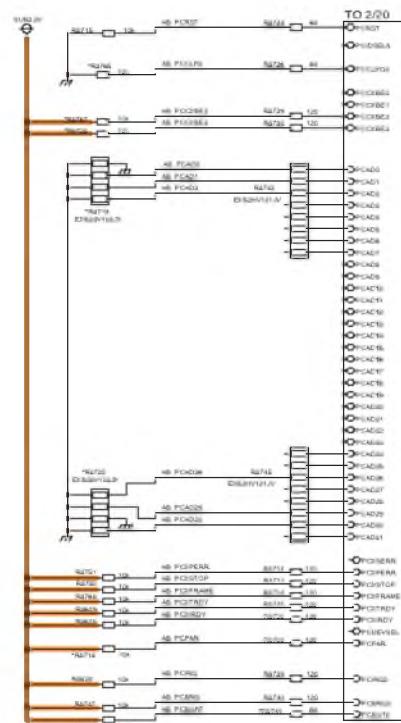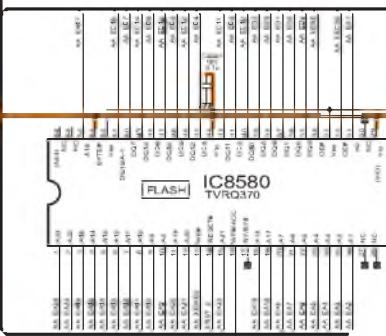


5VDC 2A
R2661 10k

11.10. A-Board (6/20) Schematic Diagram

 A-BOARD (6/20)

GenX
REF No. 1100-1499

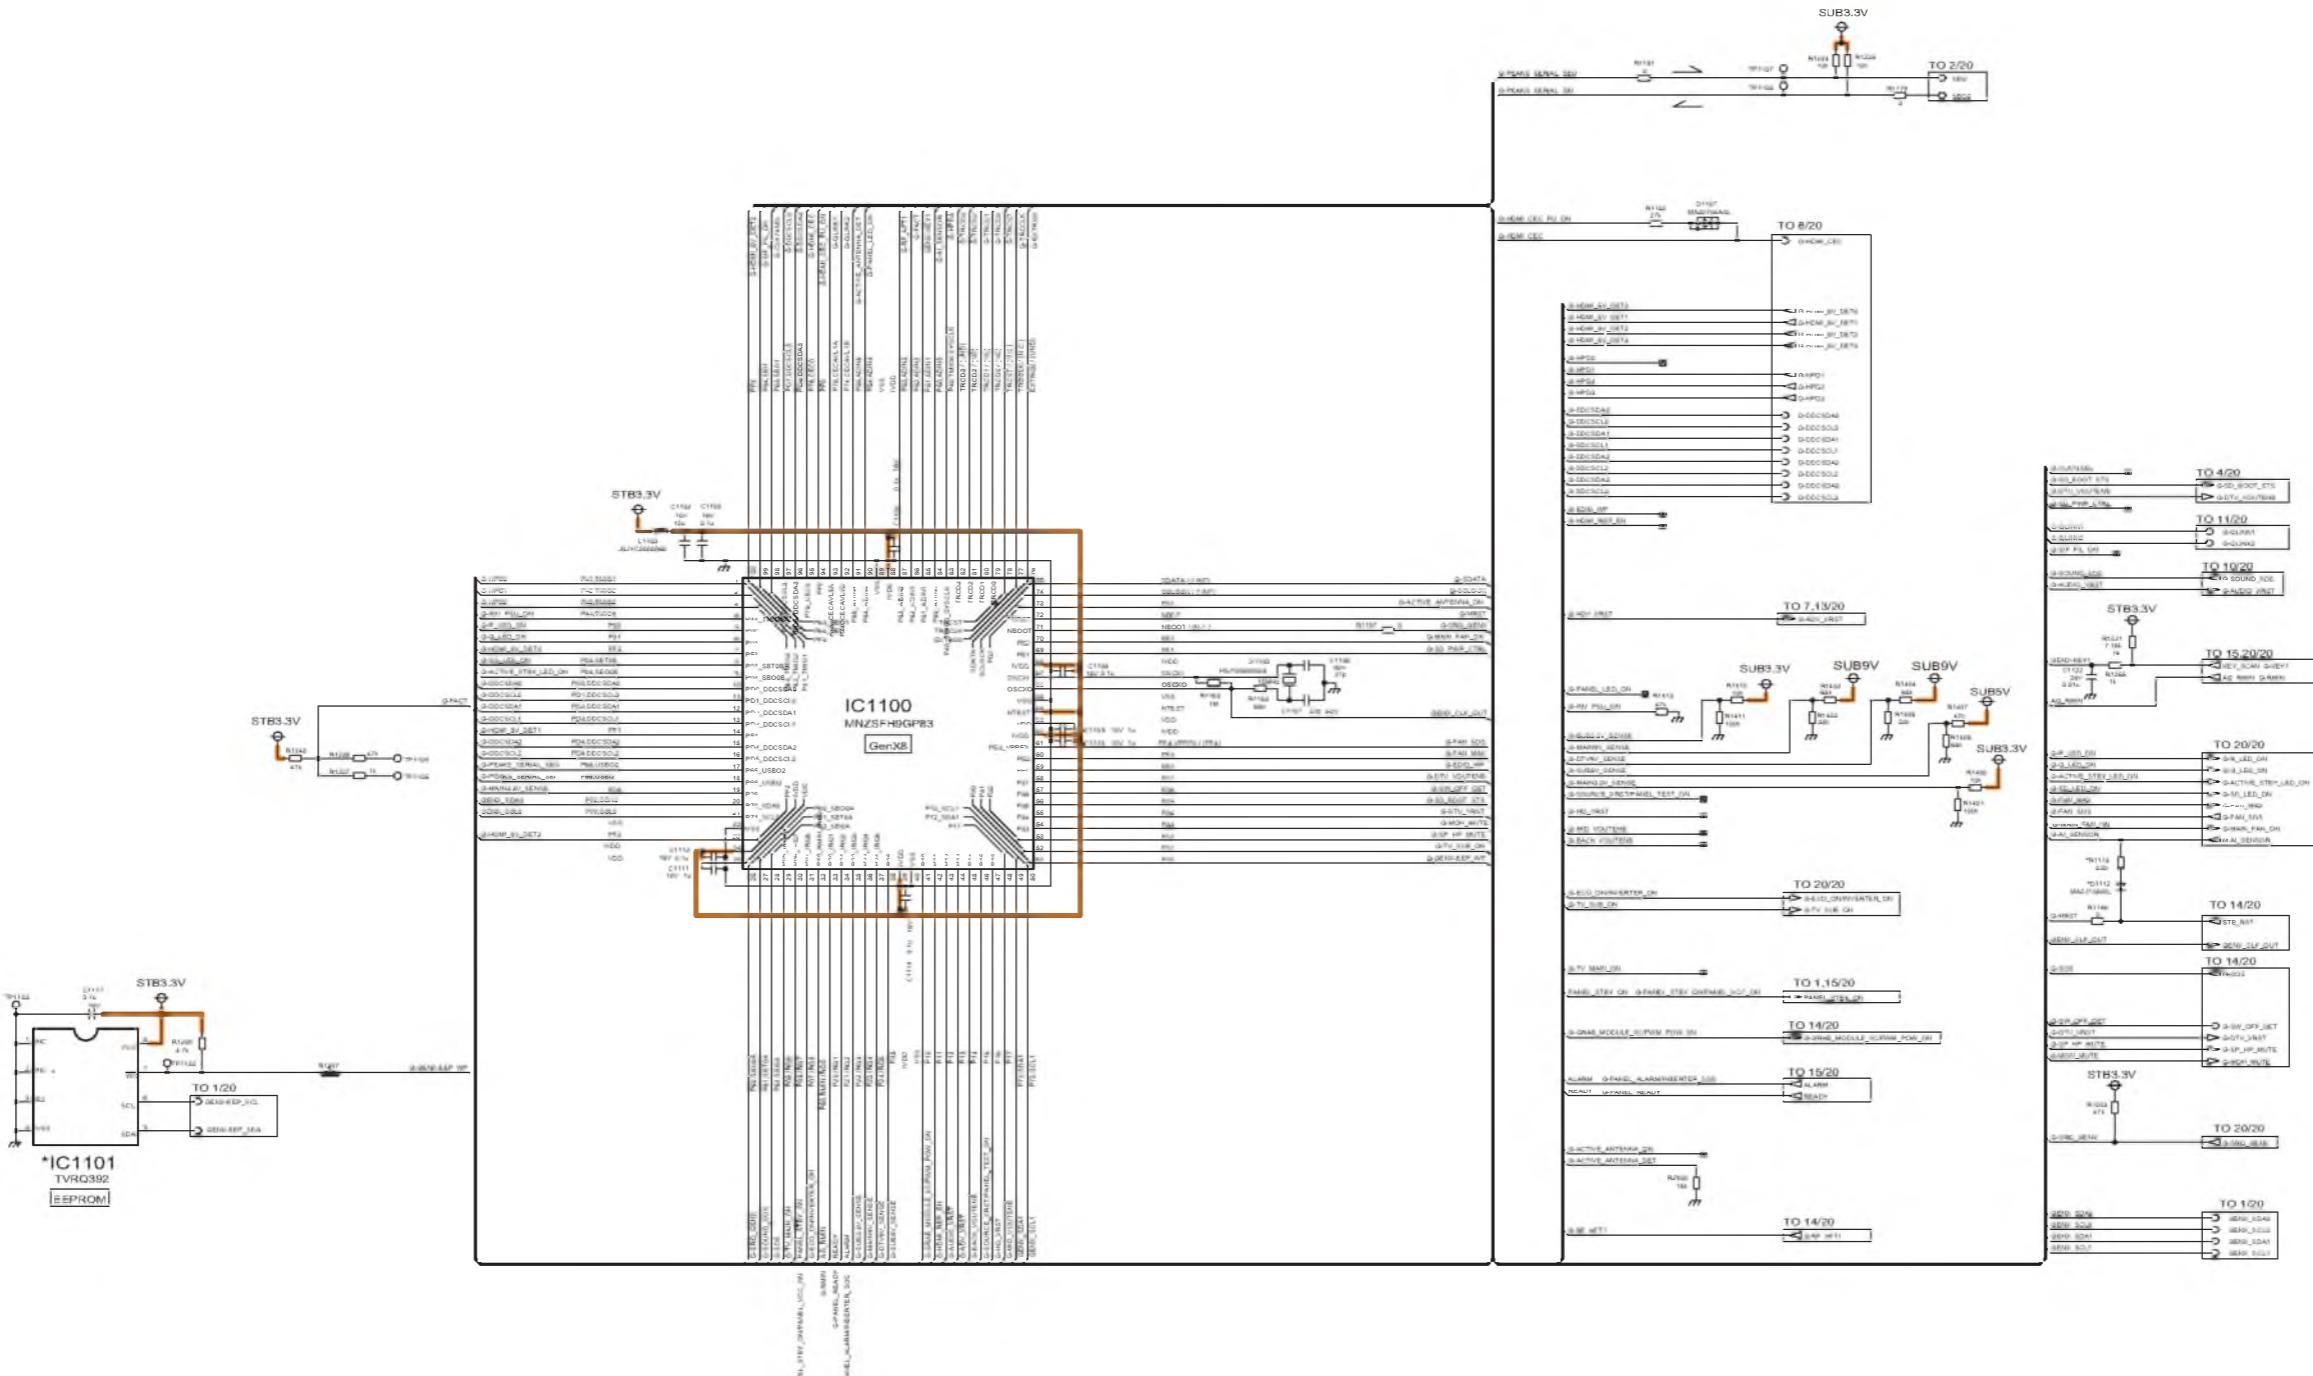

11.11. A-Board (7/20) Schematic Diagram


⚠ A-BOARD (7/20)

ADV

REF No. 4500-4799


IC4510
C1AB00003045

PowerSupply

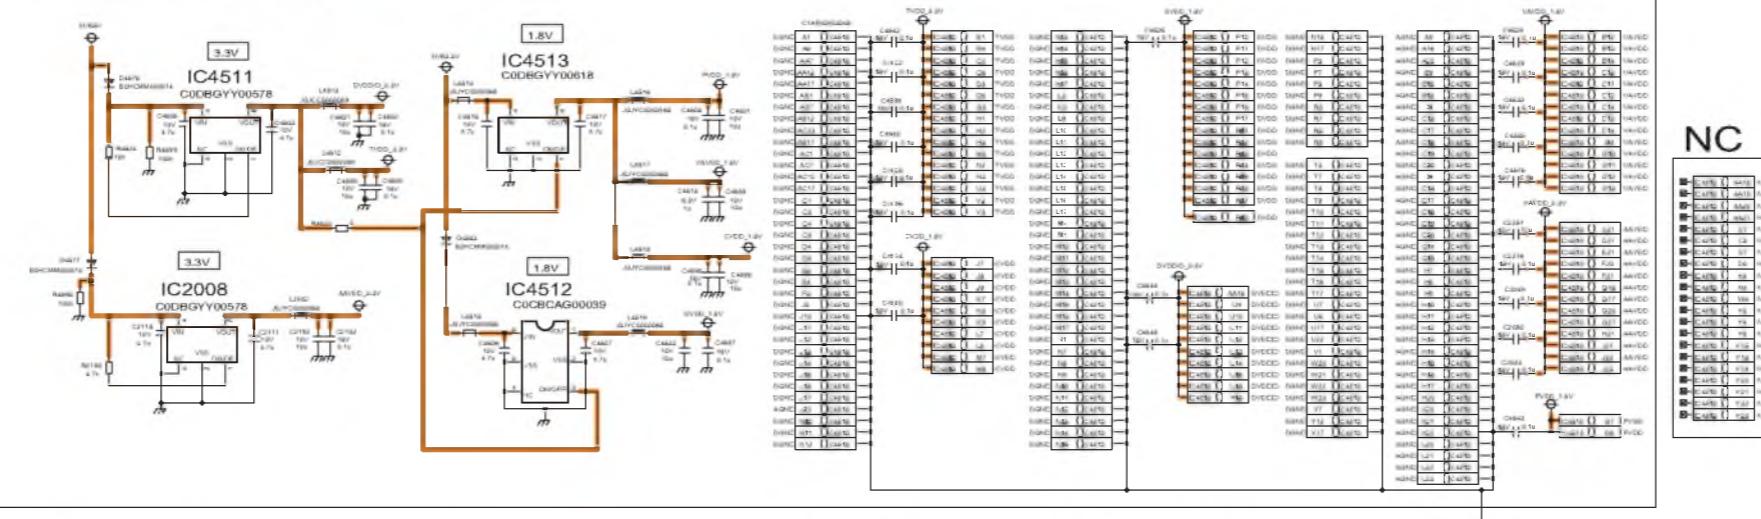

NC


ADV7496

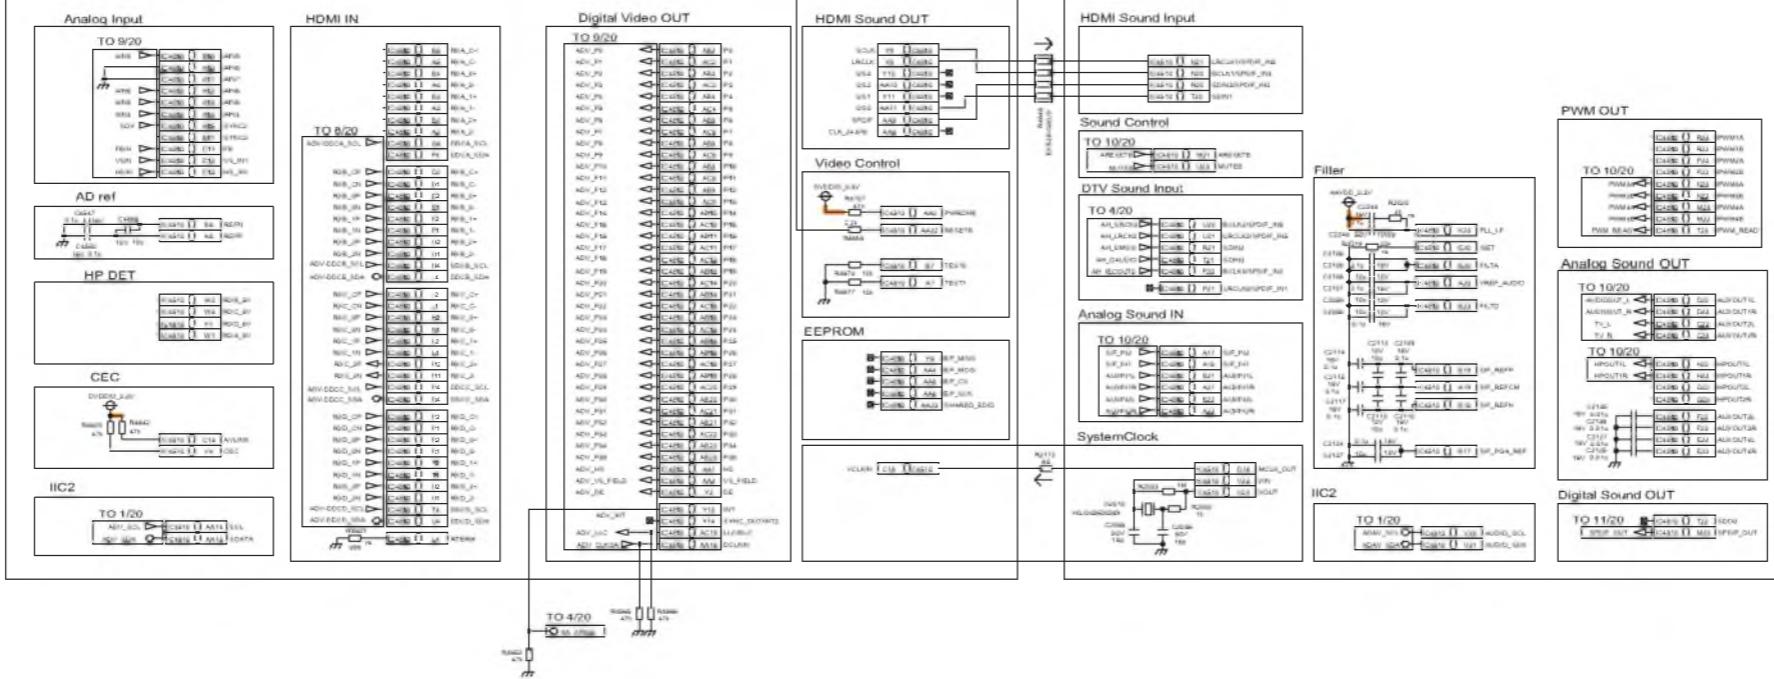

11.12. A-Board (8/20) Schematic Diagram

 A-BOARD (8/20)

ADV_V
REF No. 4500-4799

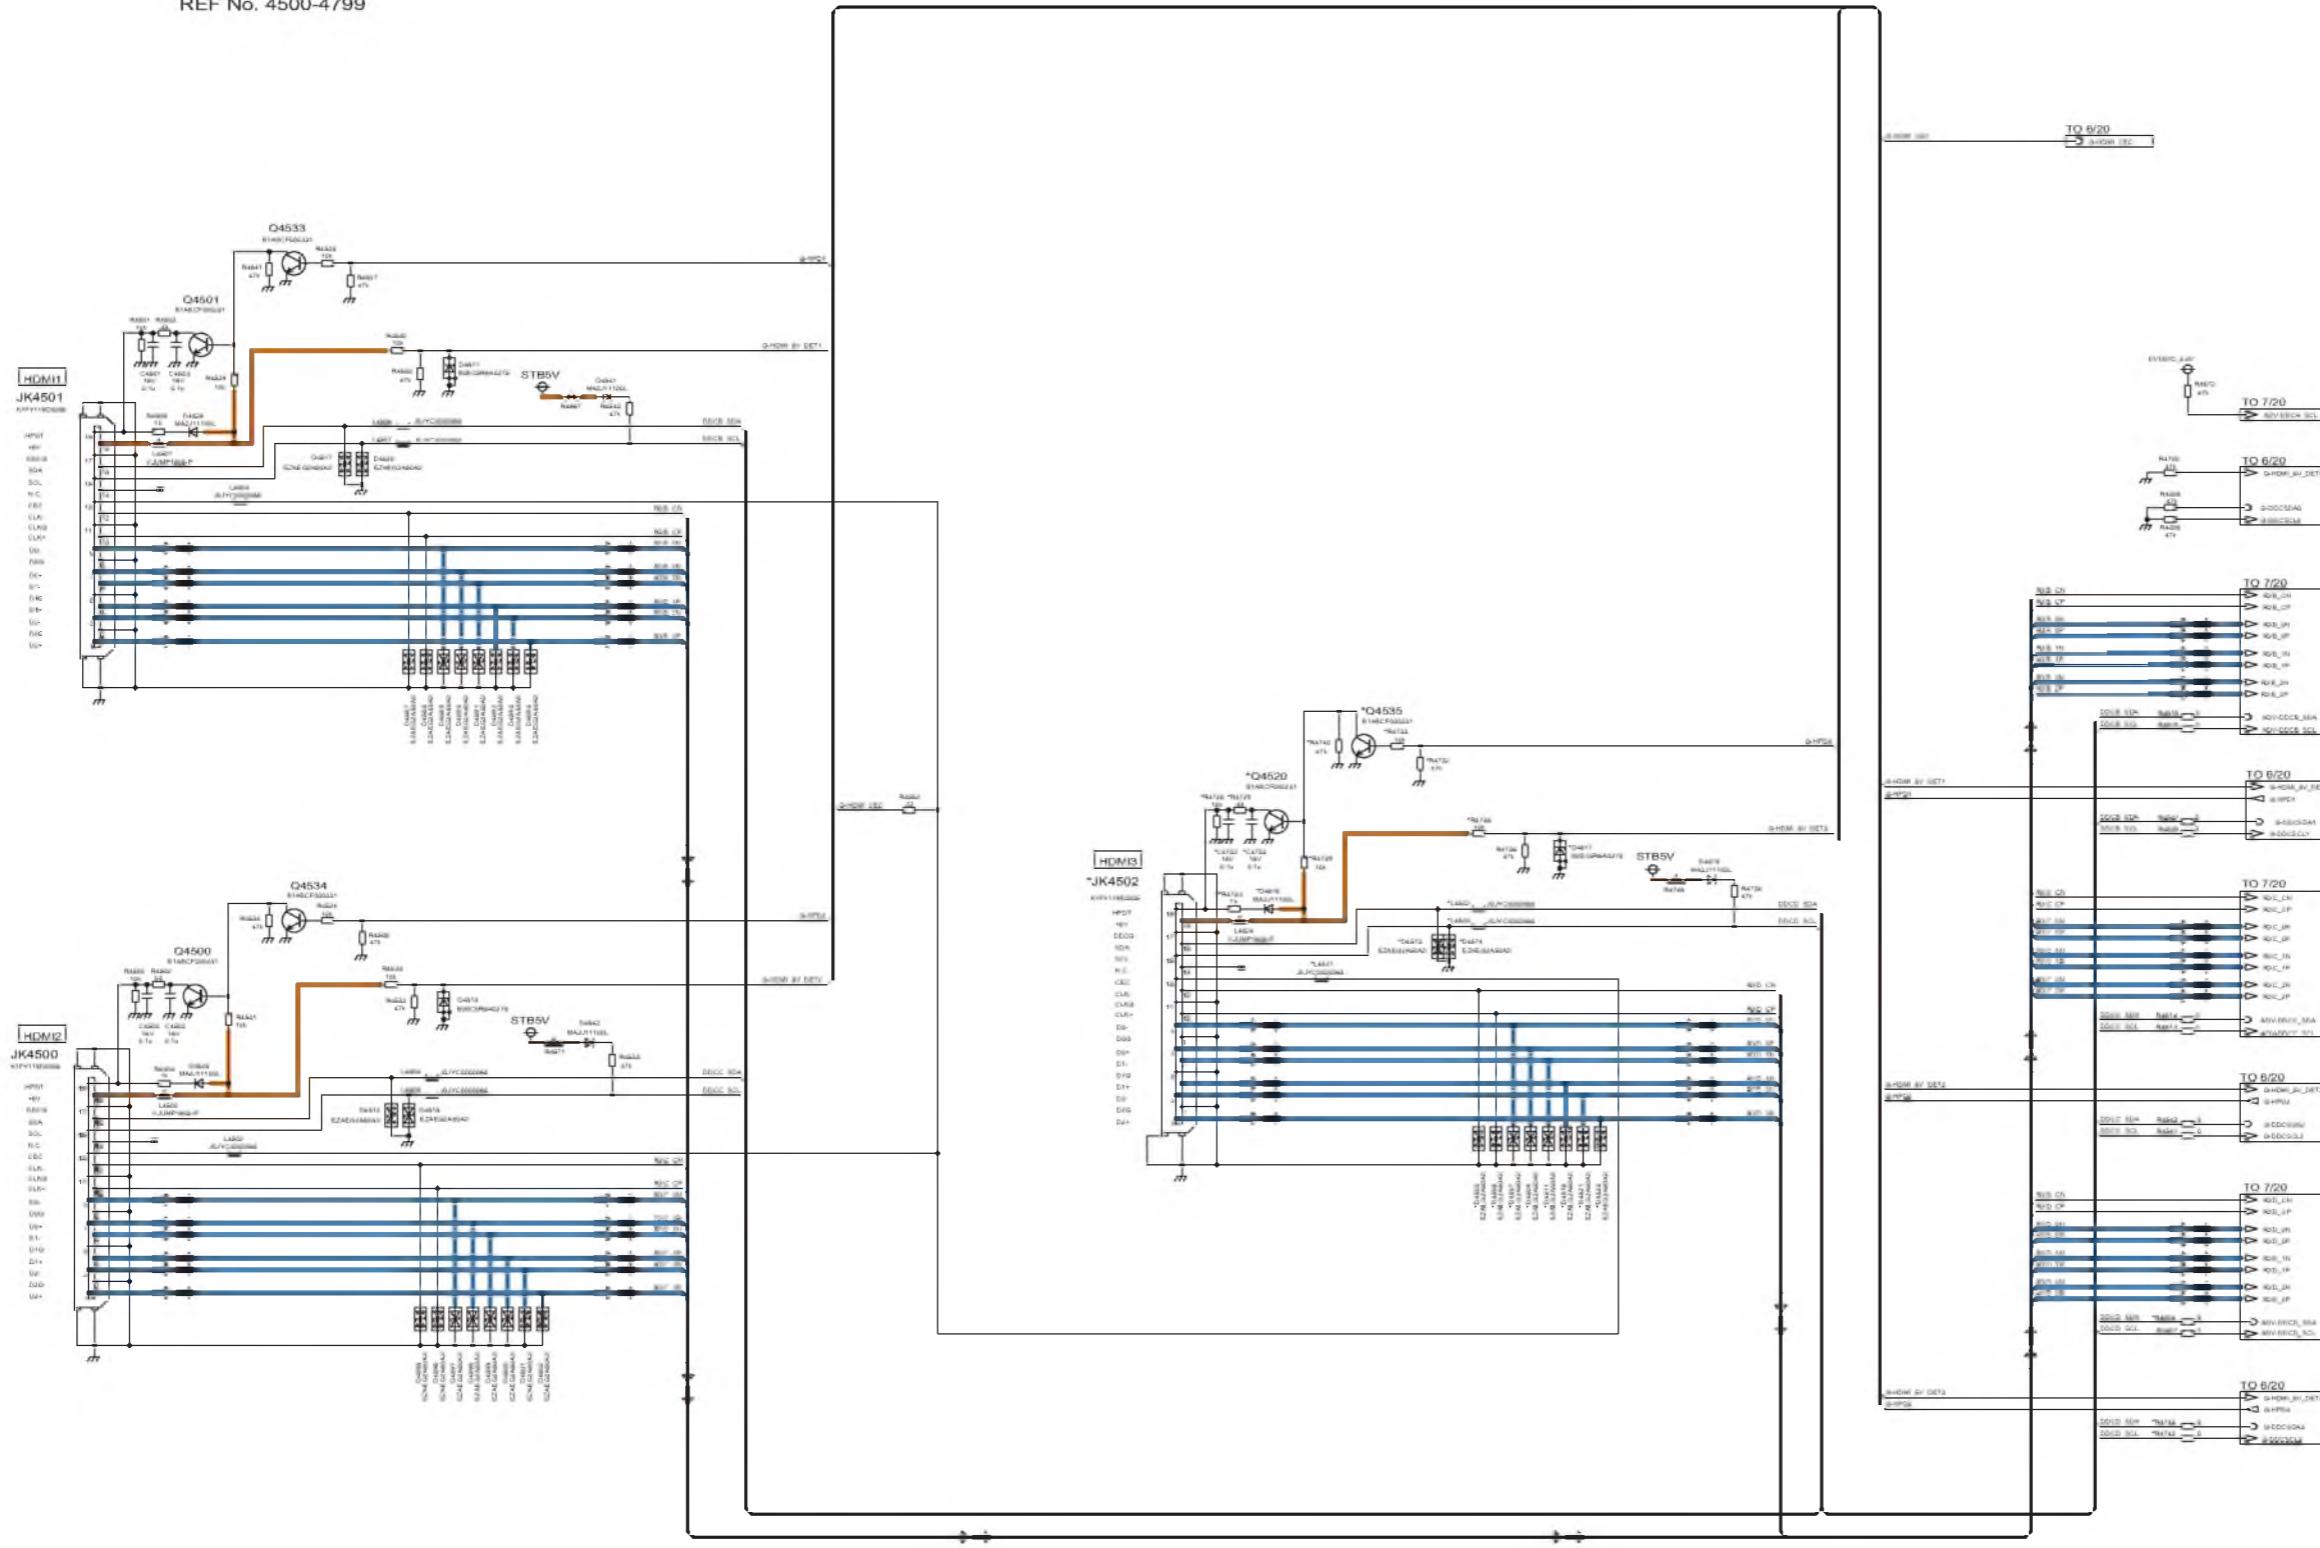

64 65 66 67 68 69 70 71 72


11.13. A-Board (9/20) Schematic Diagram




A-BOARD (9/20)

ADV_V

REF No. 4500-4799

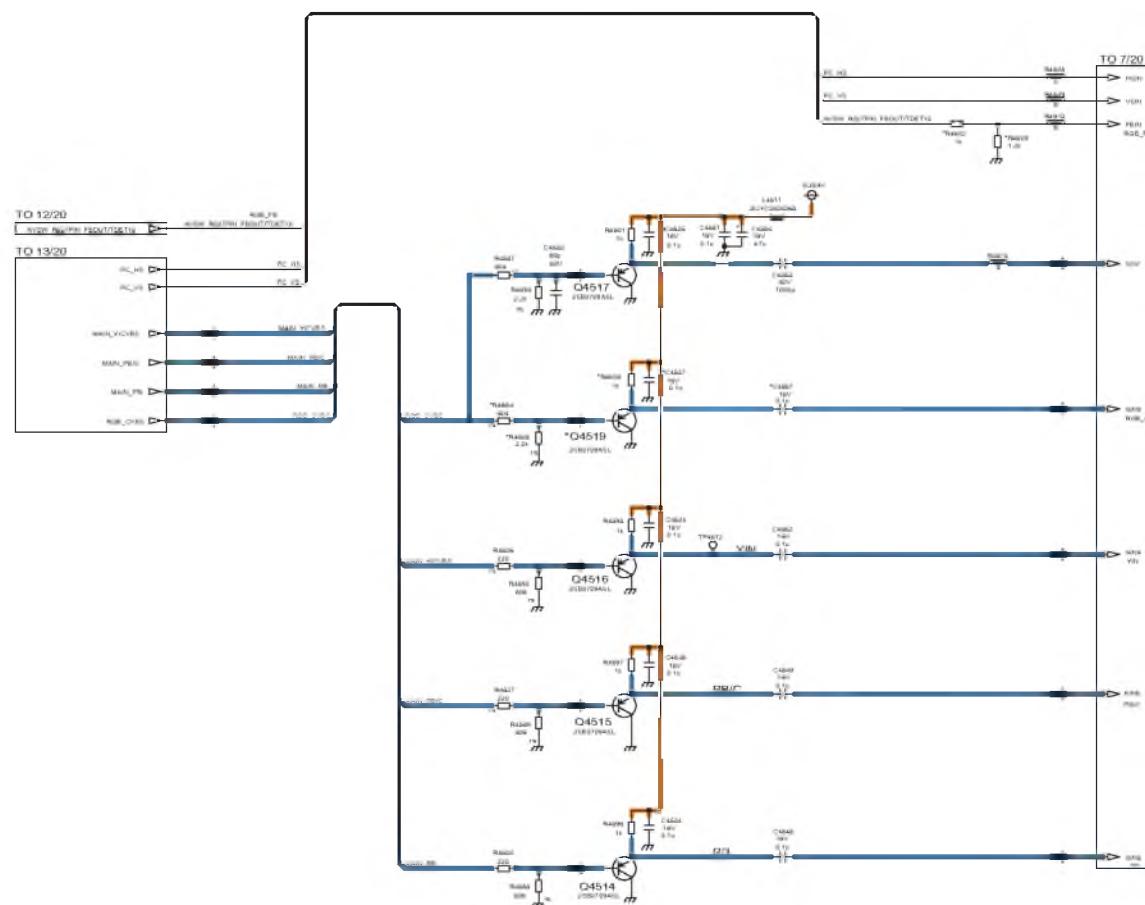


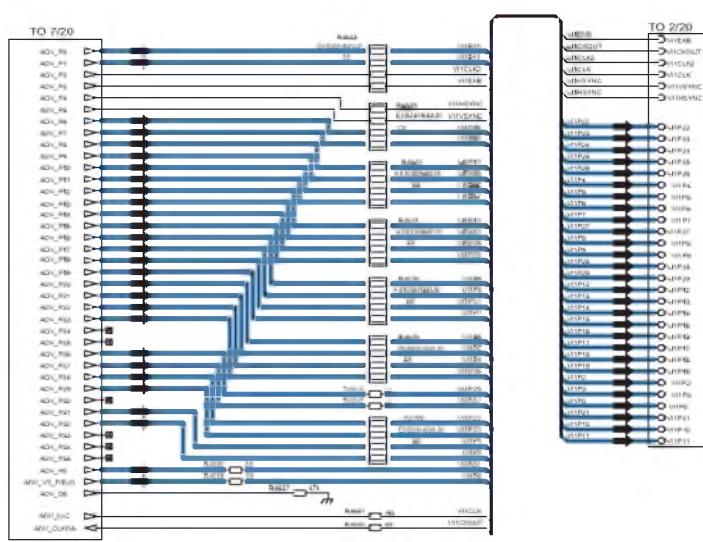

11.14. A-Board (10/20) Schematic Diagram

A-BOARD (10/20)

ADV_A
REF No. 2000-2499


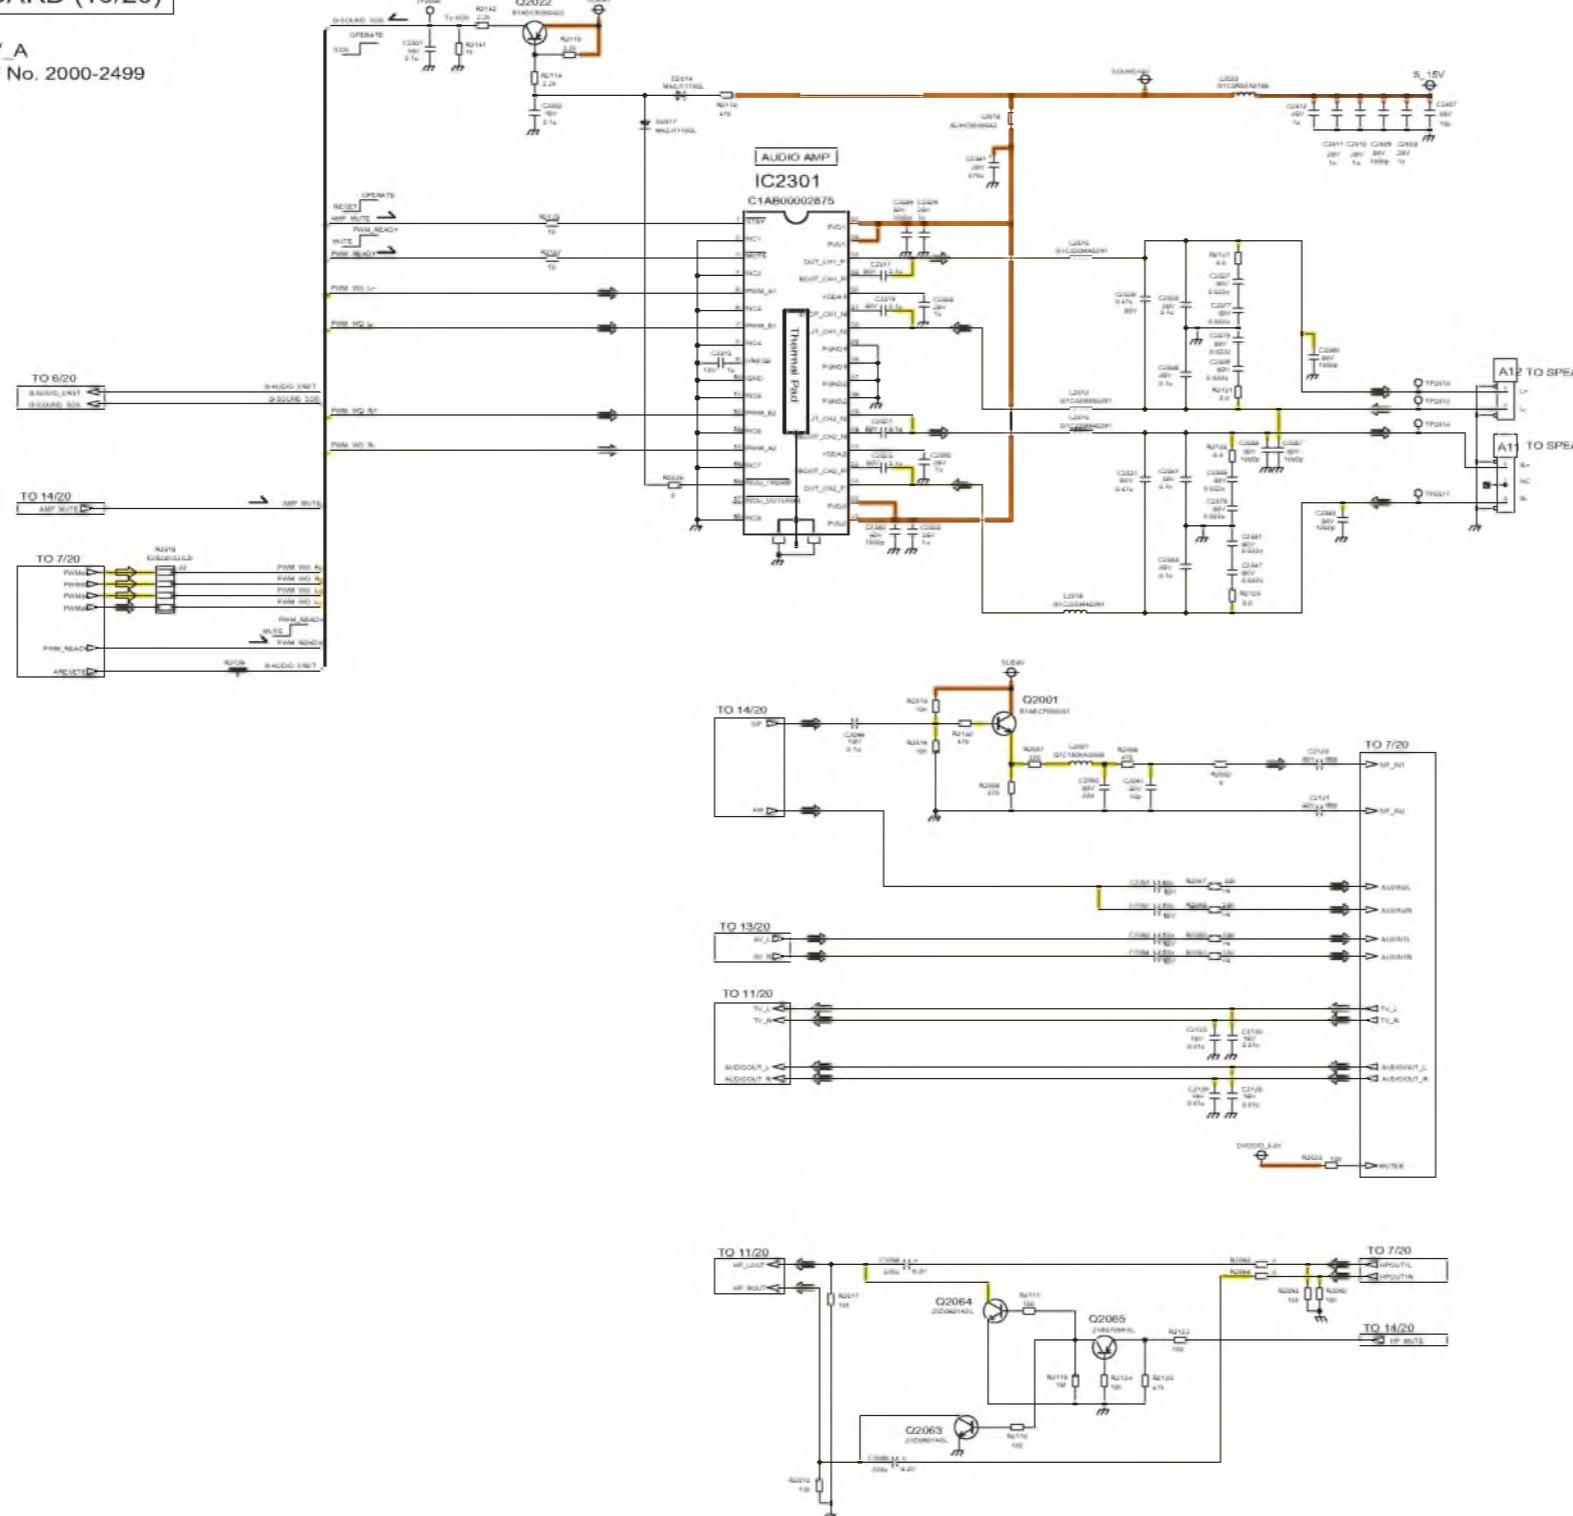



11.15. A-Board (11/20) Schematic Diagram

A-BOARD (11/20)

AVSW

REF No. 3000-3399

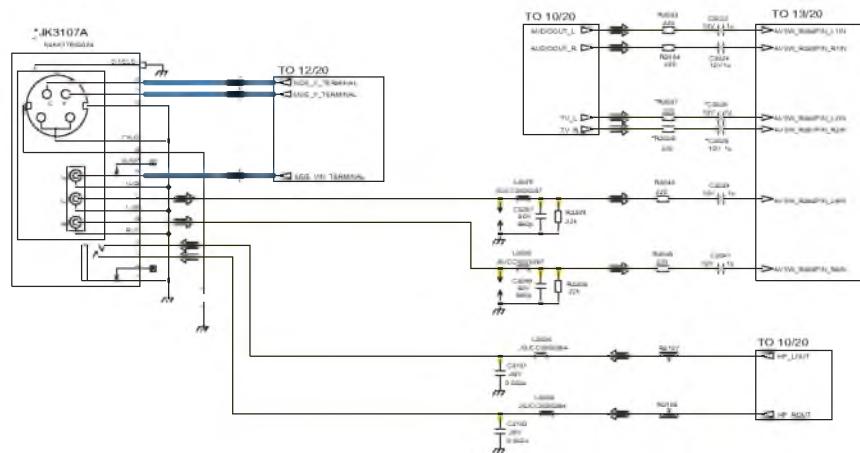
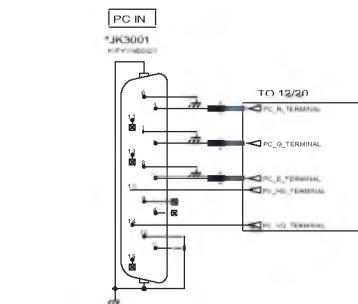


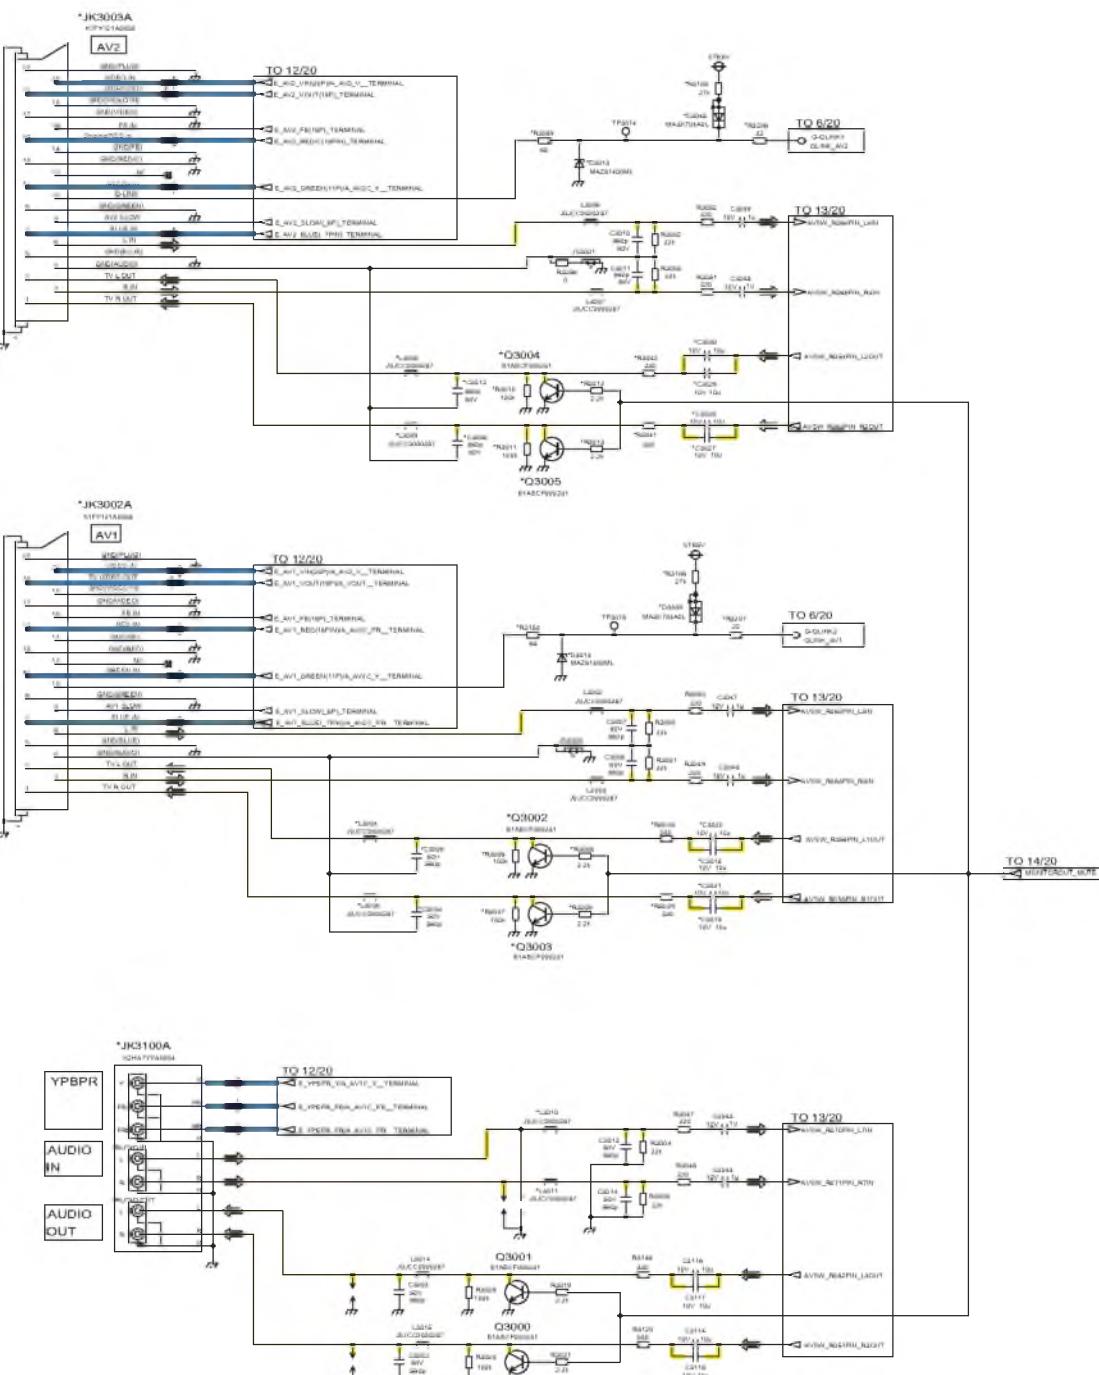


11.16. A-Board (12/20) Schematic Diagram

A-BOARD (12/20)


AVSW
REF No. 3000-3399

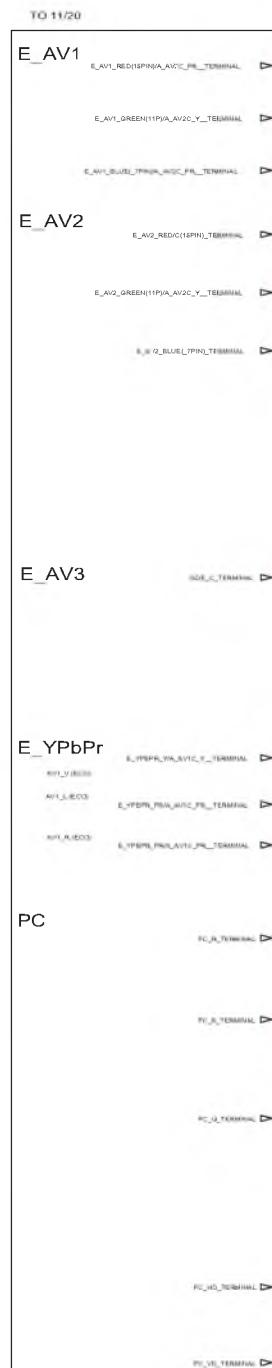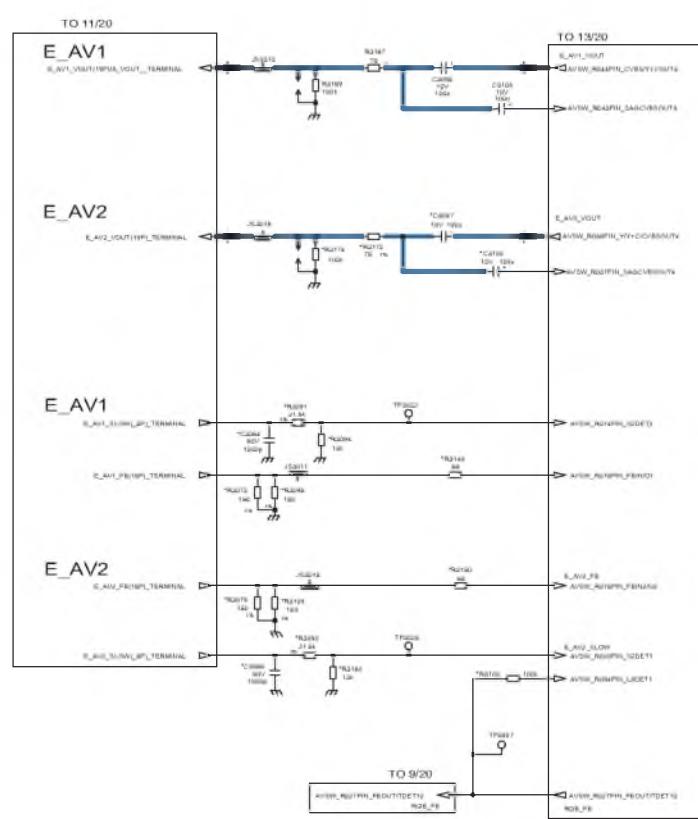

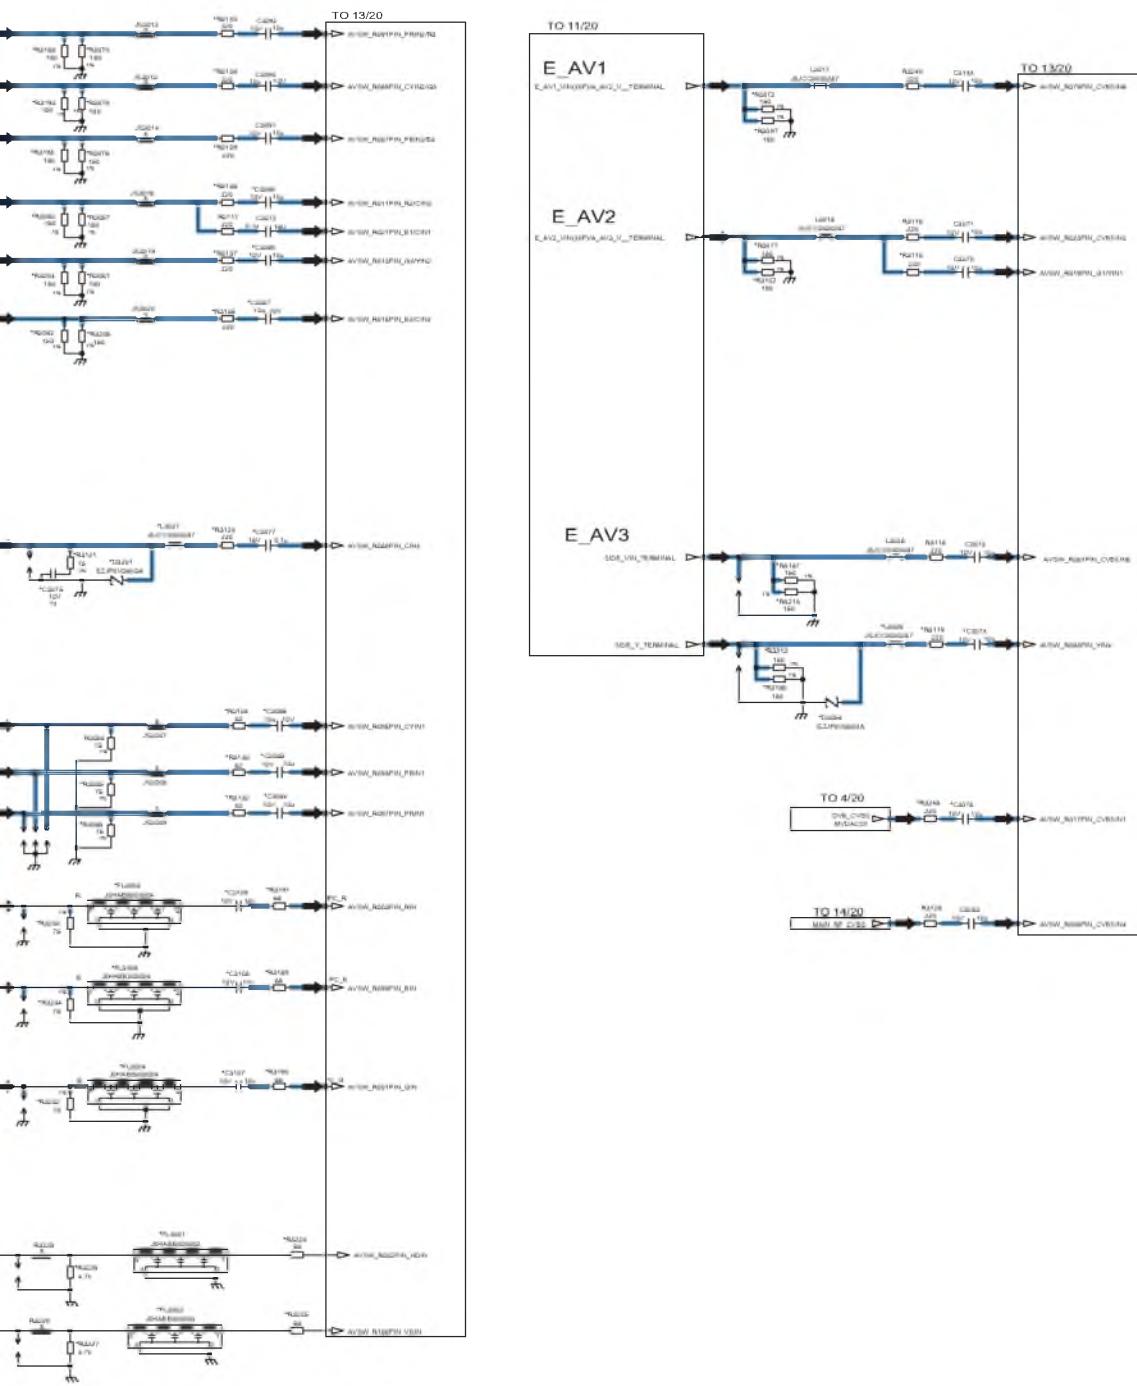

11.17. A-Board (13/20) Schematic Diagram

⚠ A-BOARD (13/20)
AVSW
REF No. 3000-3399

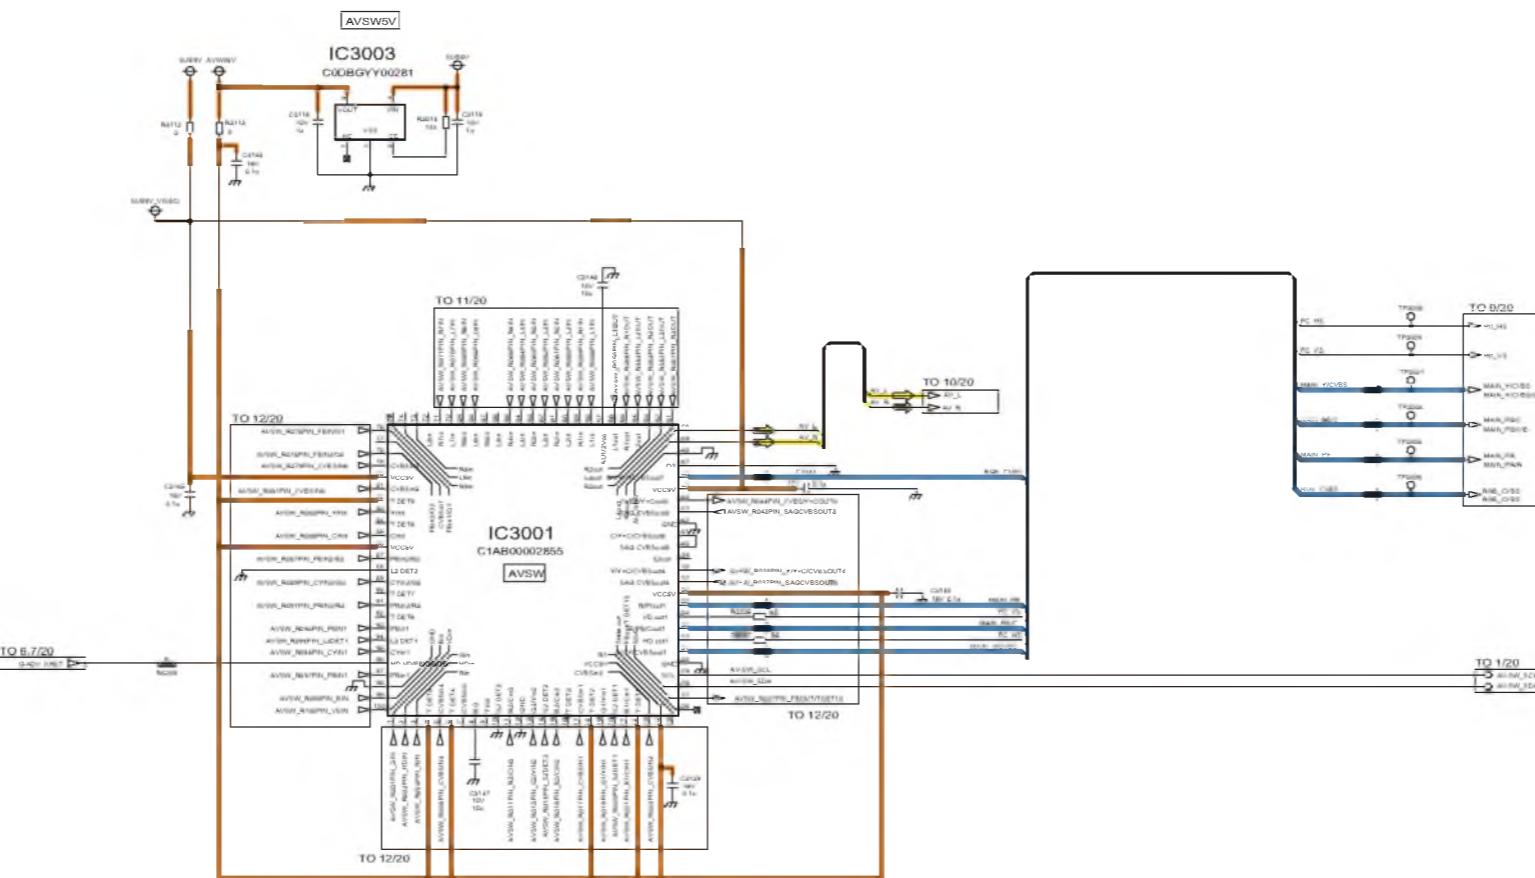

109

110

111

112

113


114

115


116

117


11.18. A-Board (14/20) Schematic Diagram

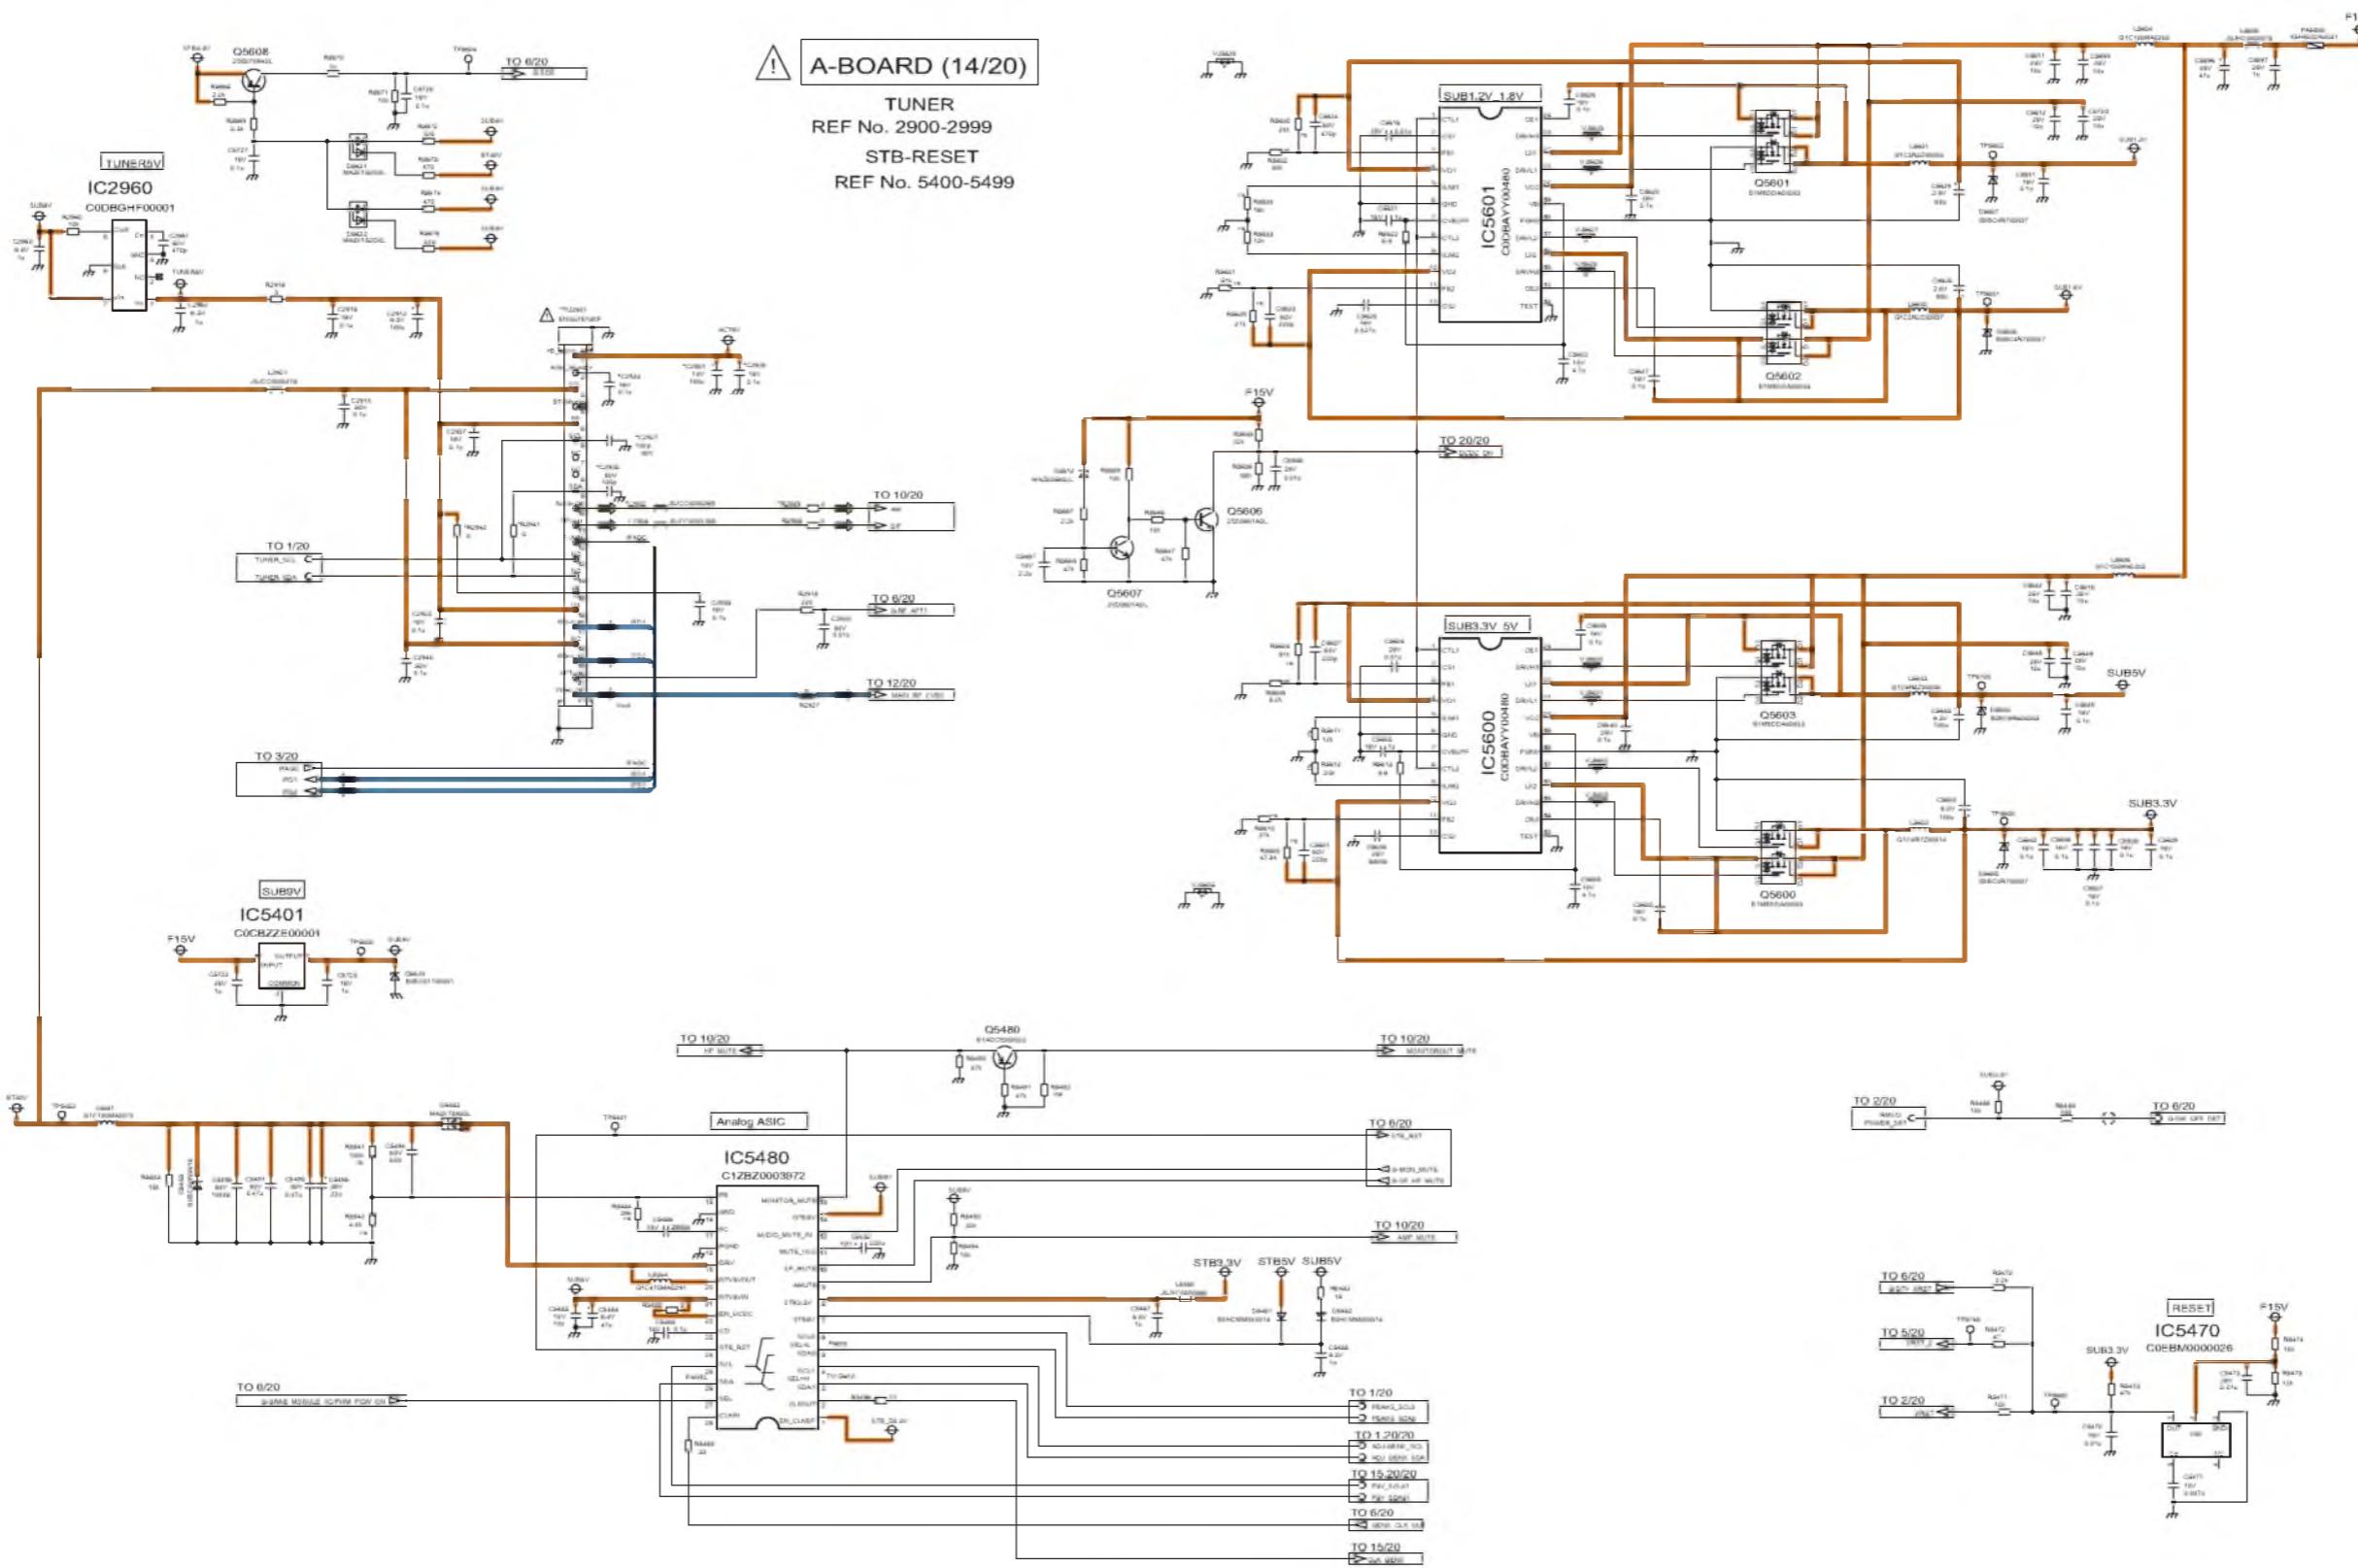


11.19. A-Board (15/20) Schematic Diagram

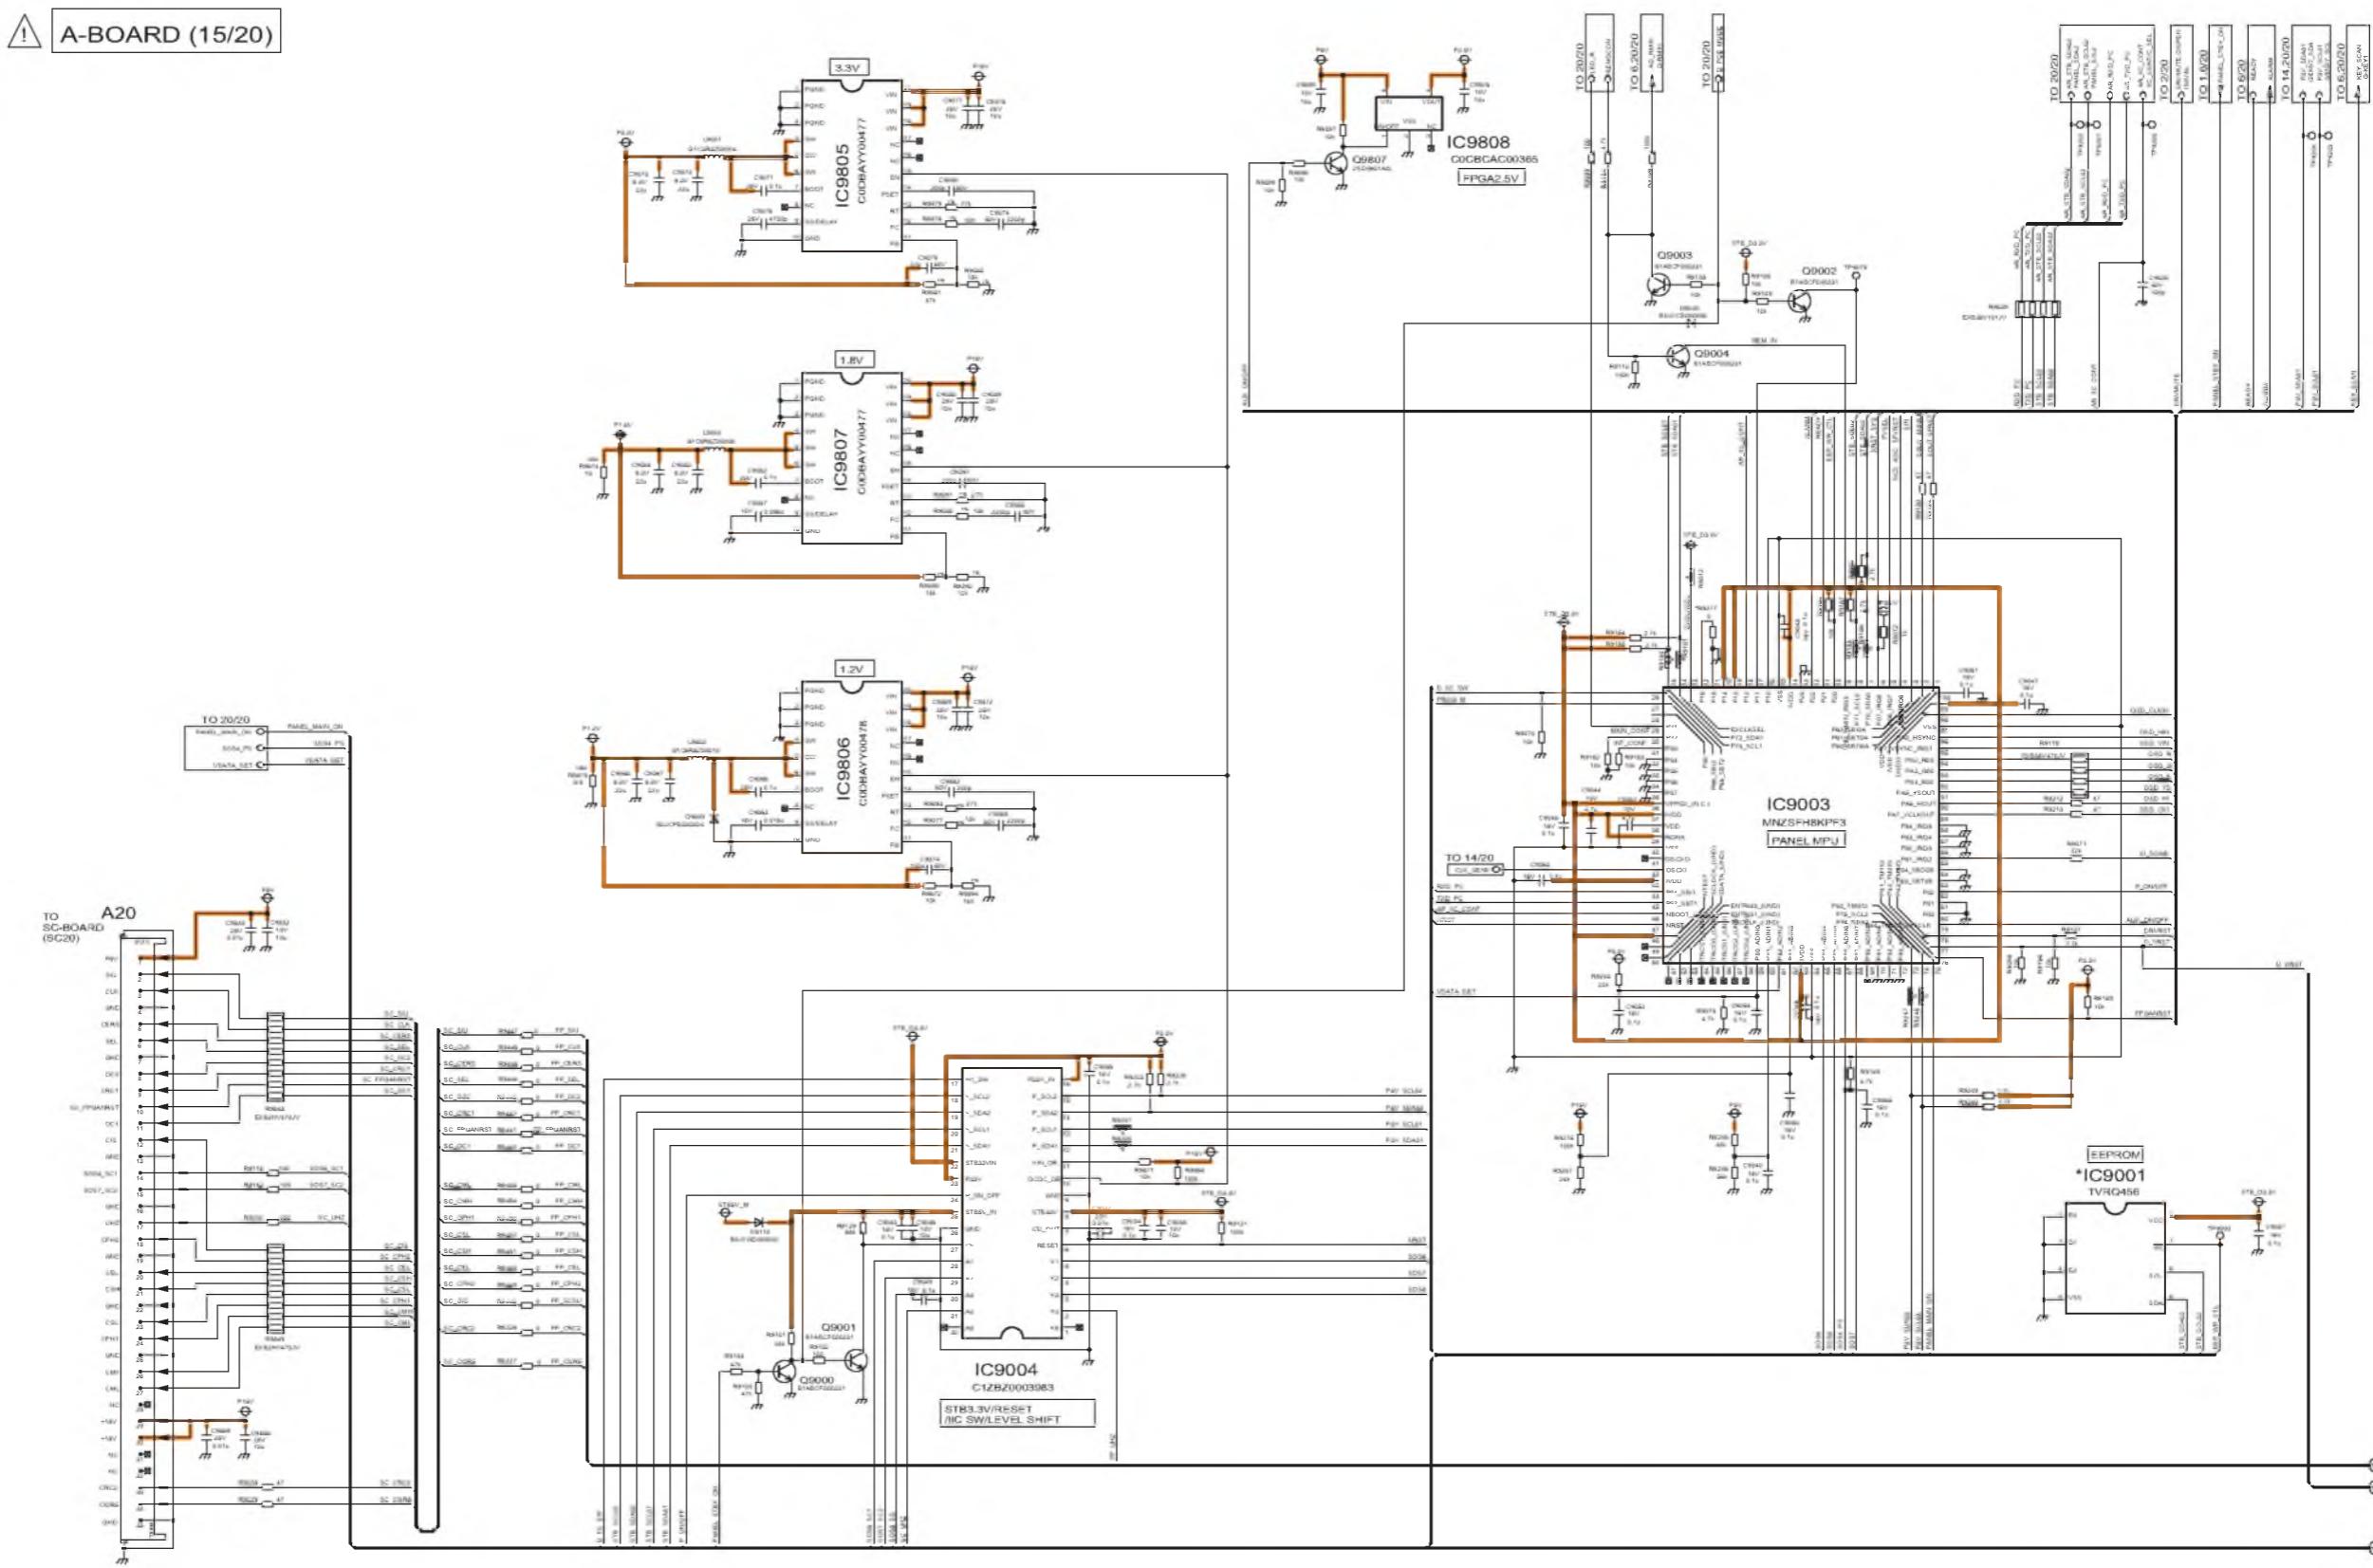

11.20. A-Board (16/20) Schematic Diagram

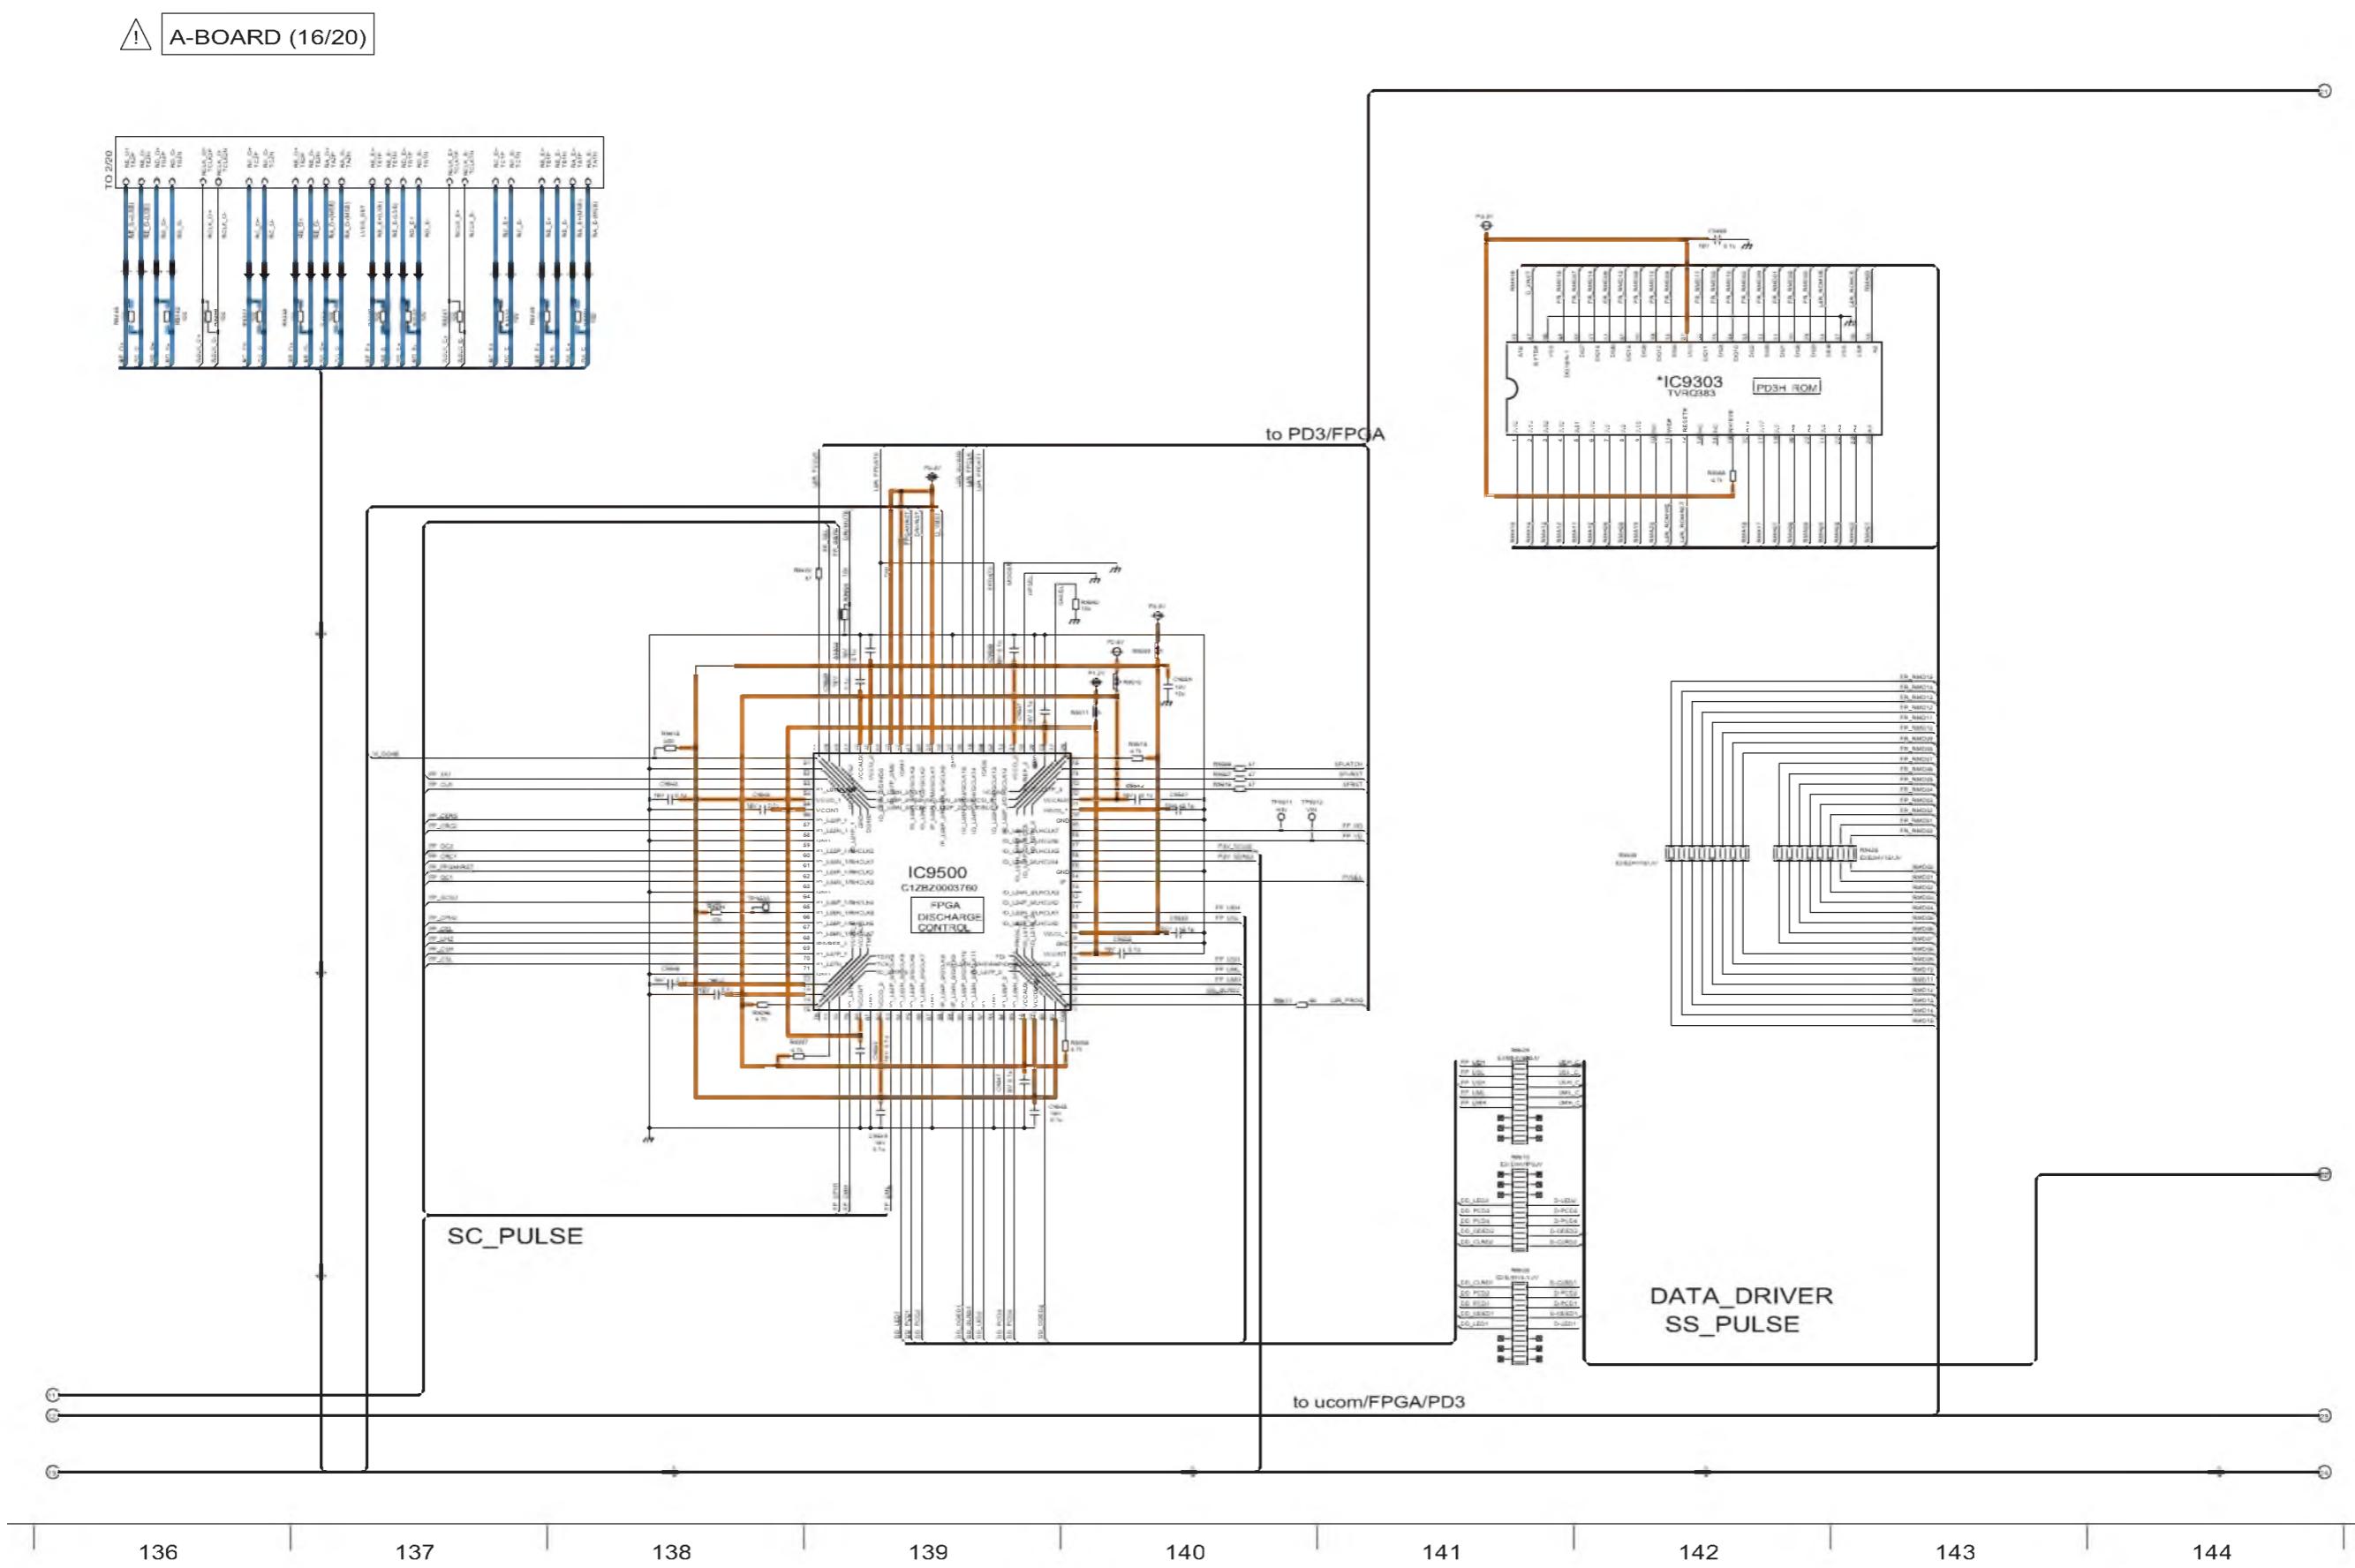


11.21. A-Board (17/20) Schematic Diagram

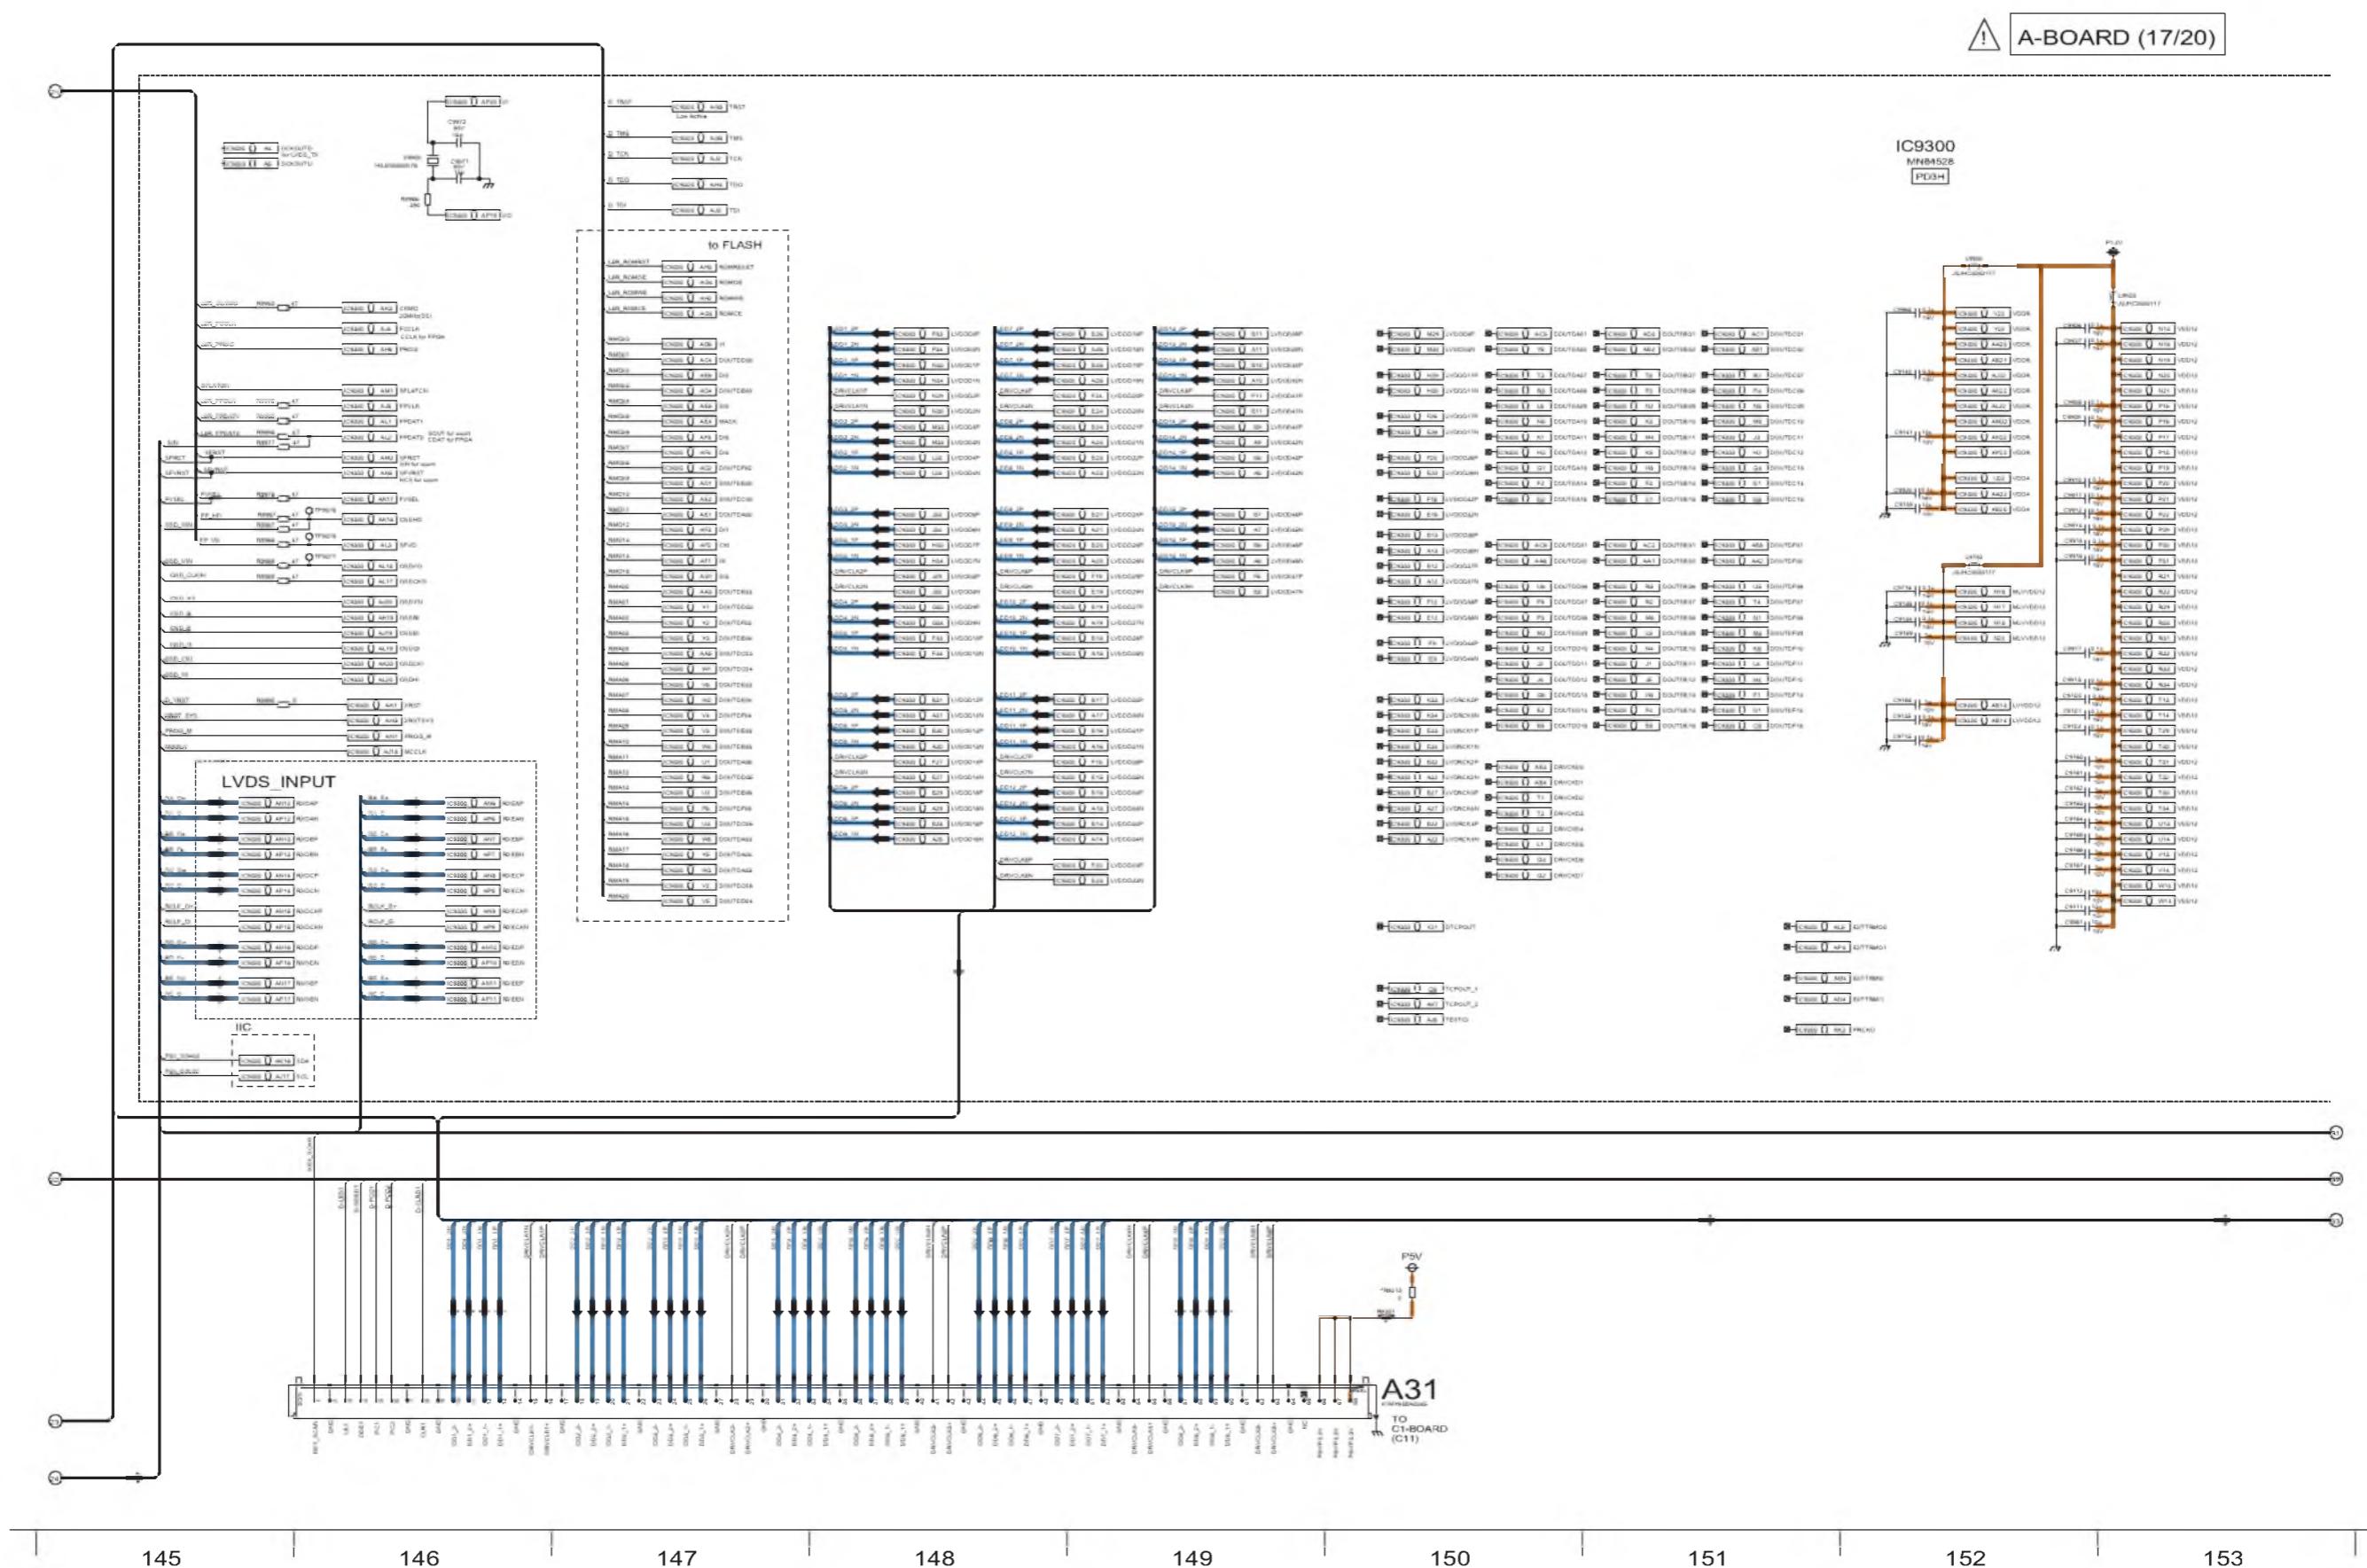


11.22. A-Board (18/20) Schematic Diagram

! A-BOARD (18/20)

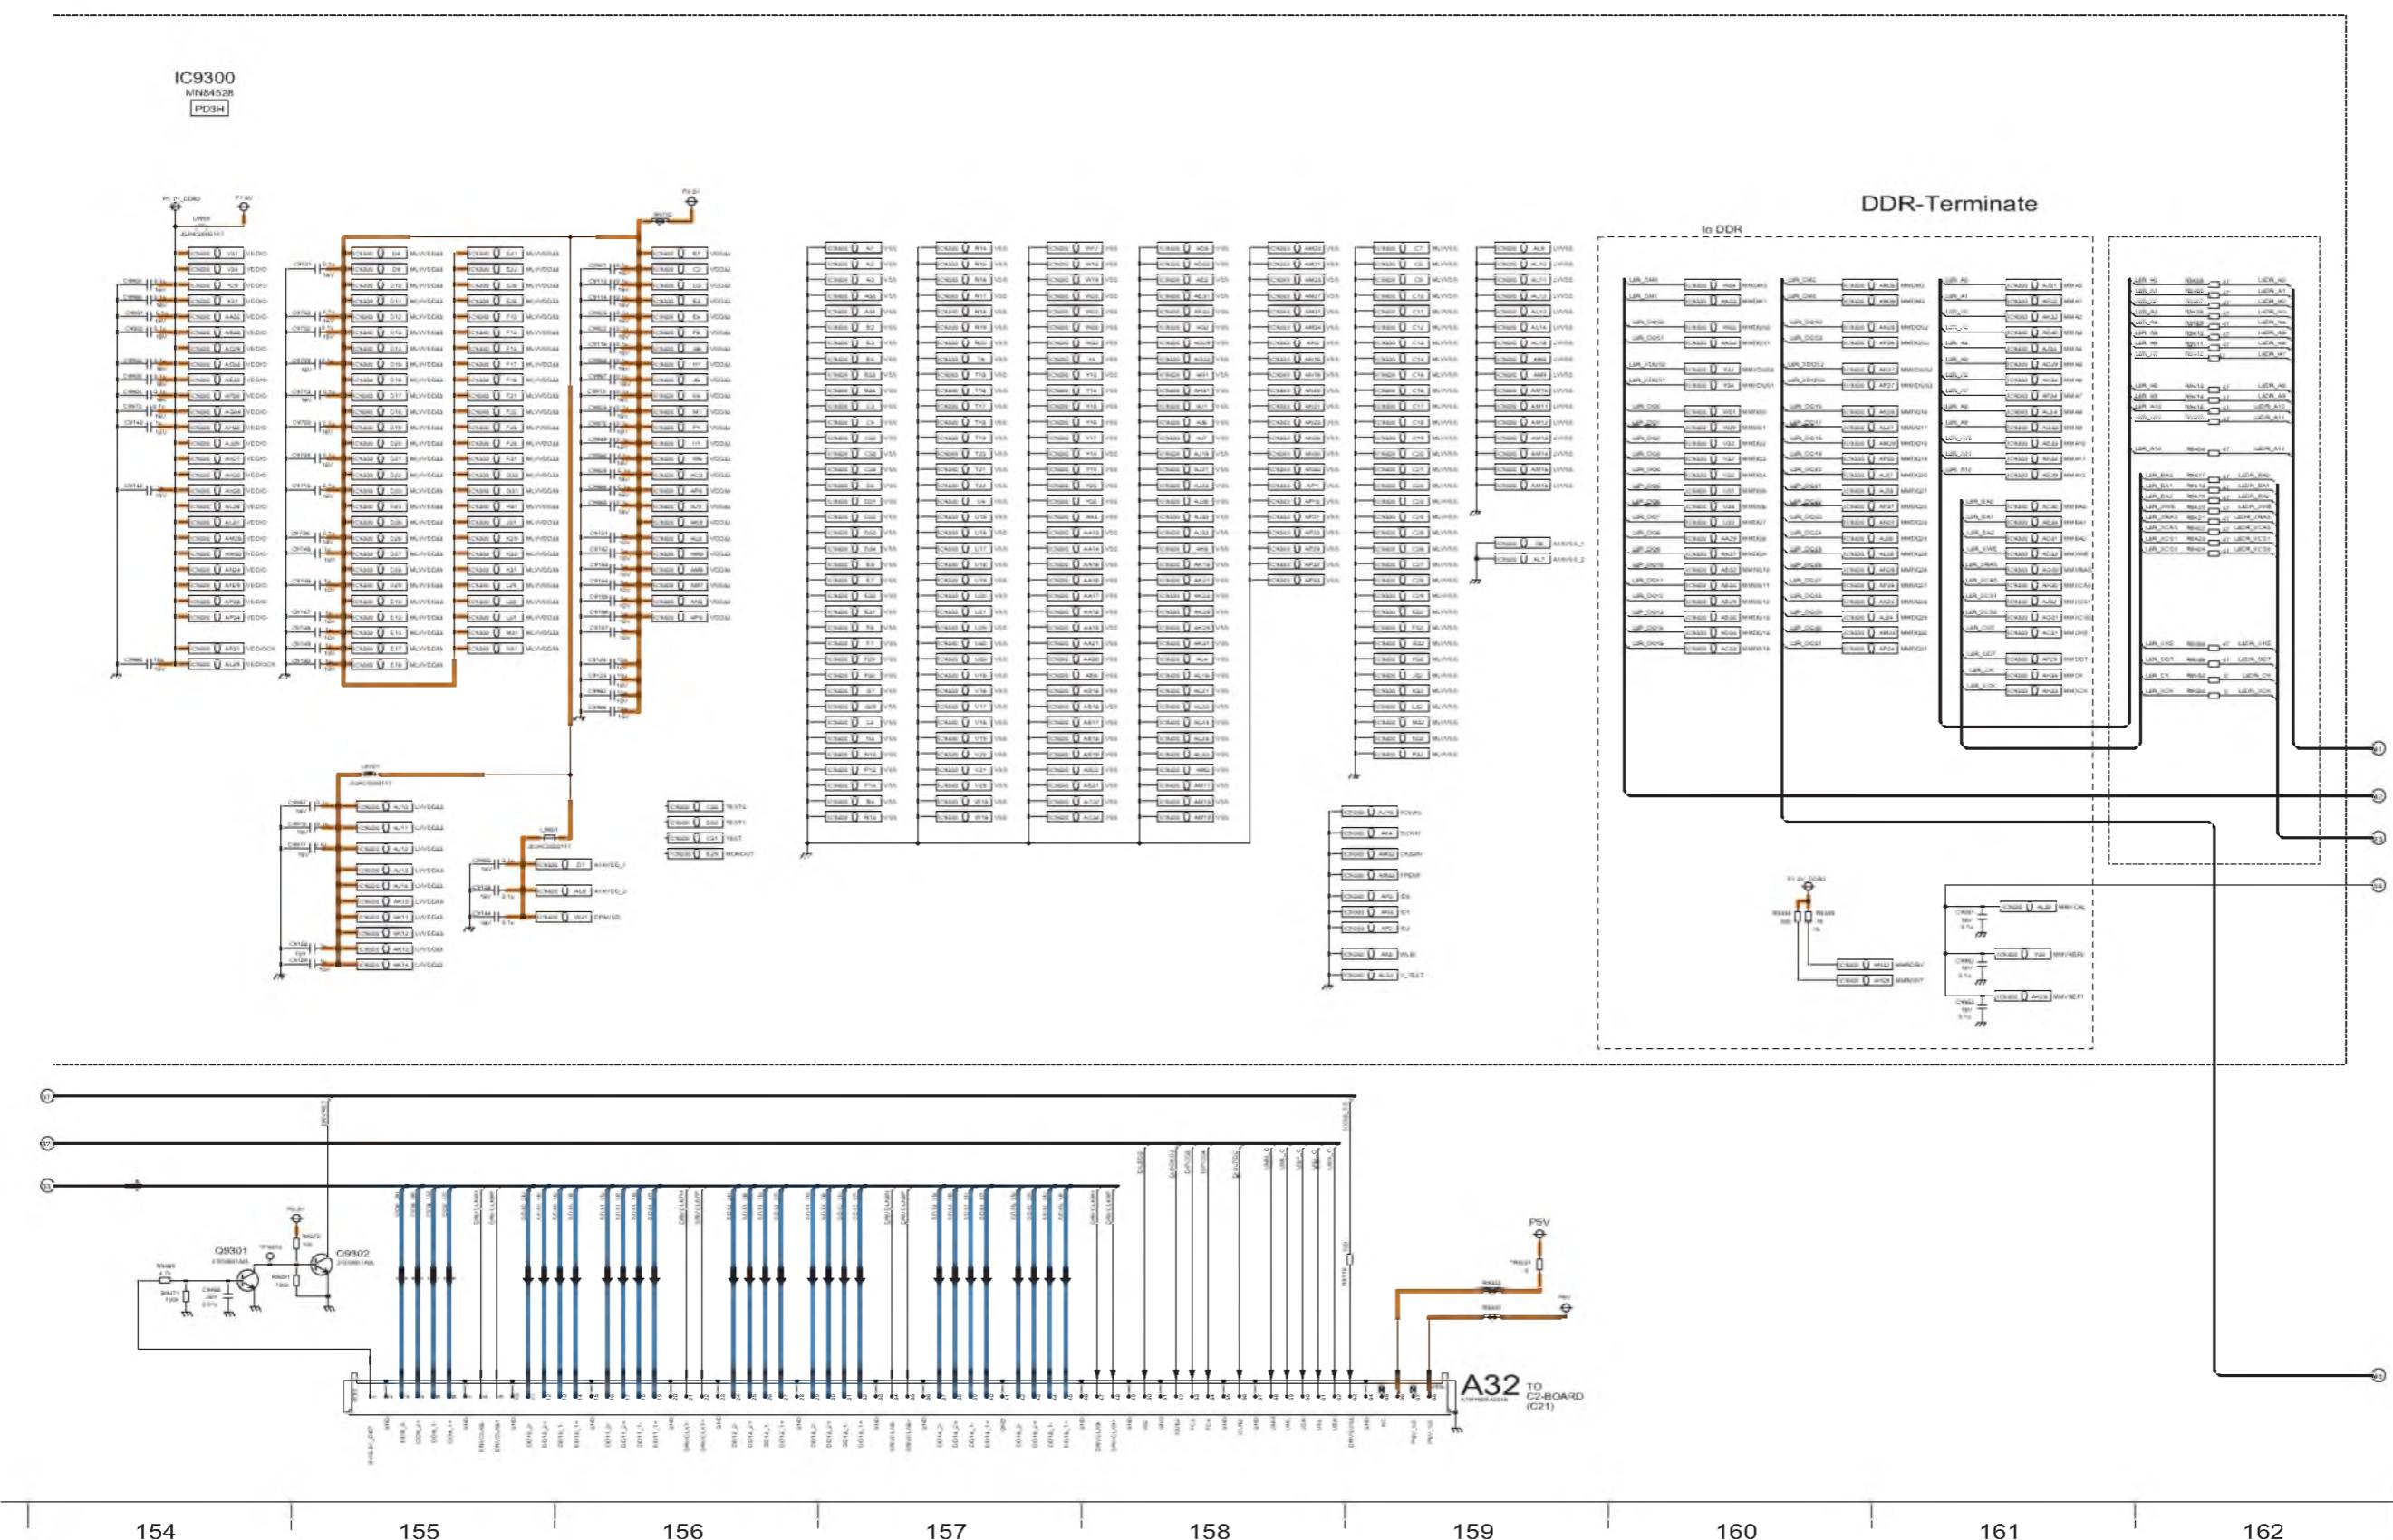


11.23. A-Board (19/20) Schematic Diagram


⚠ A-BOARD (19/20)

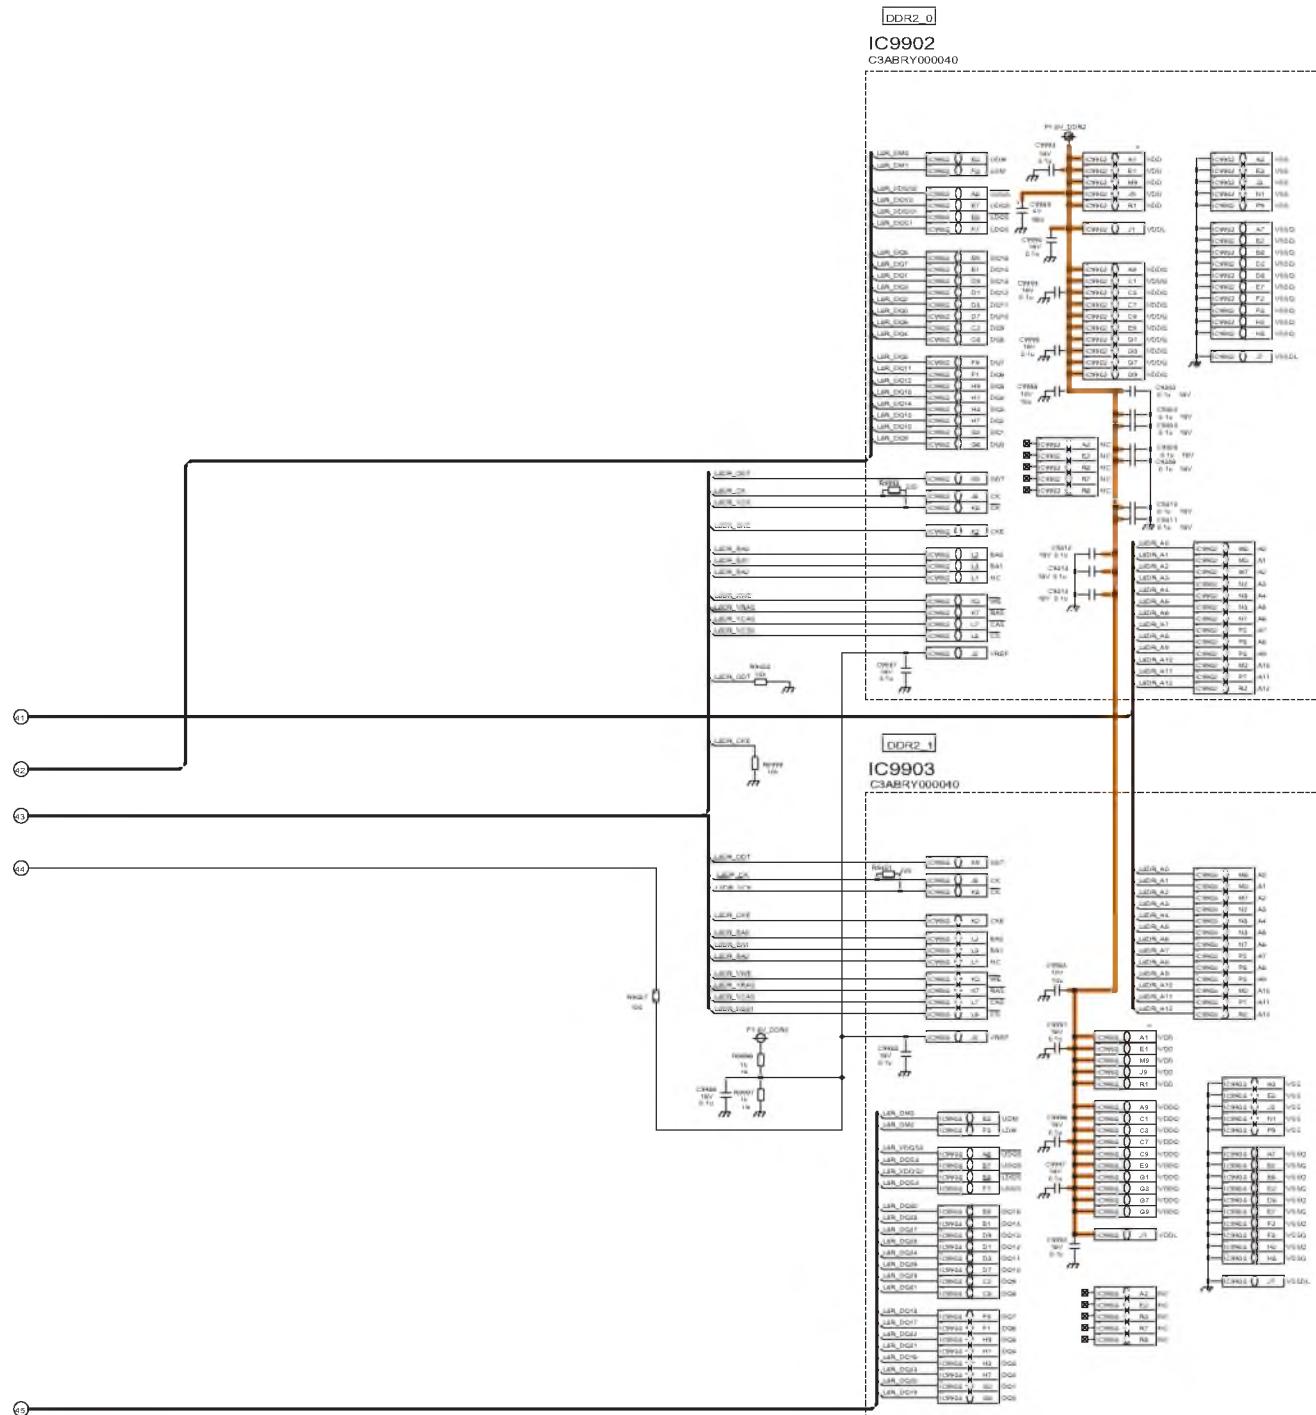


11.24. A-Board (20/20) Schematic Diagram

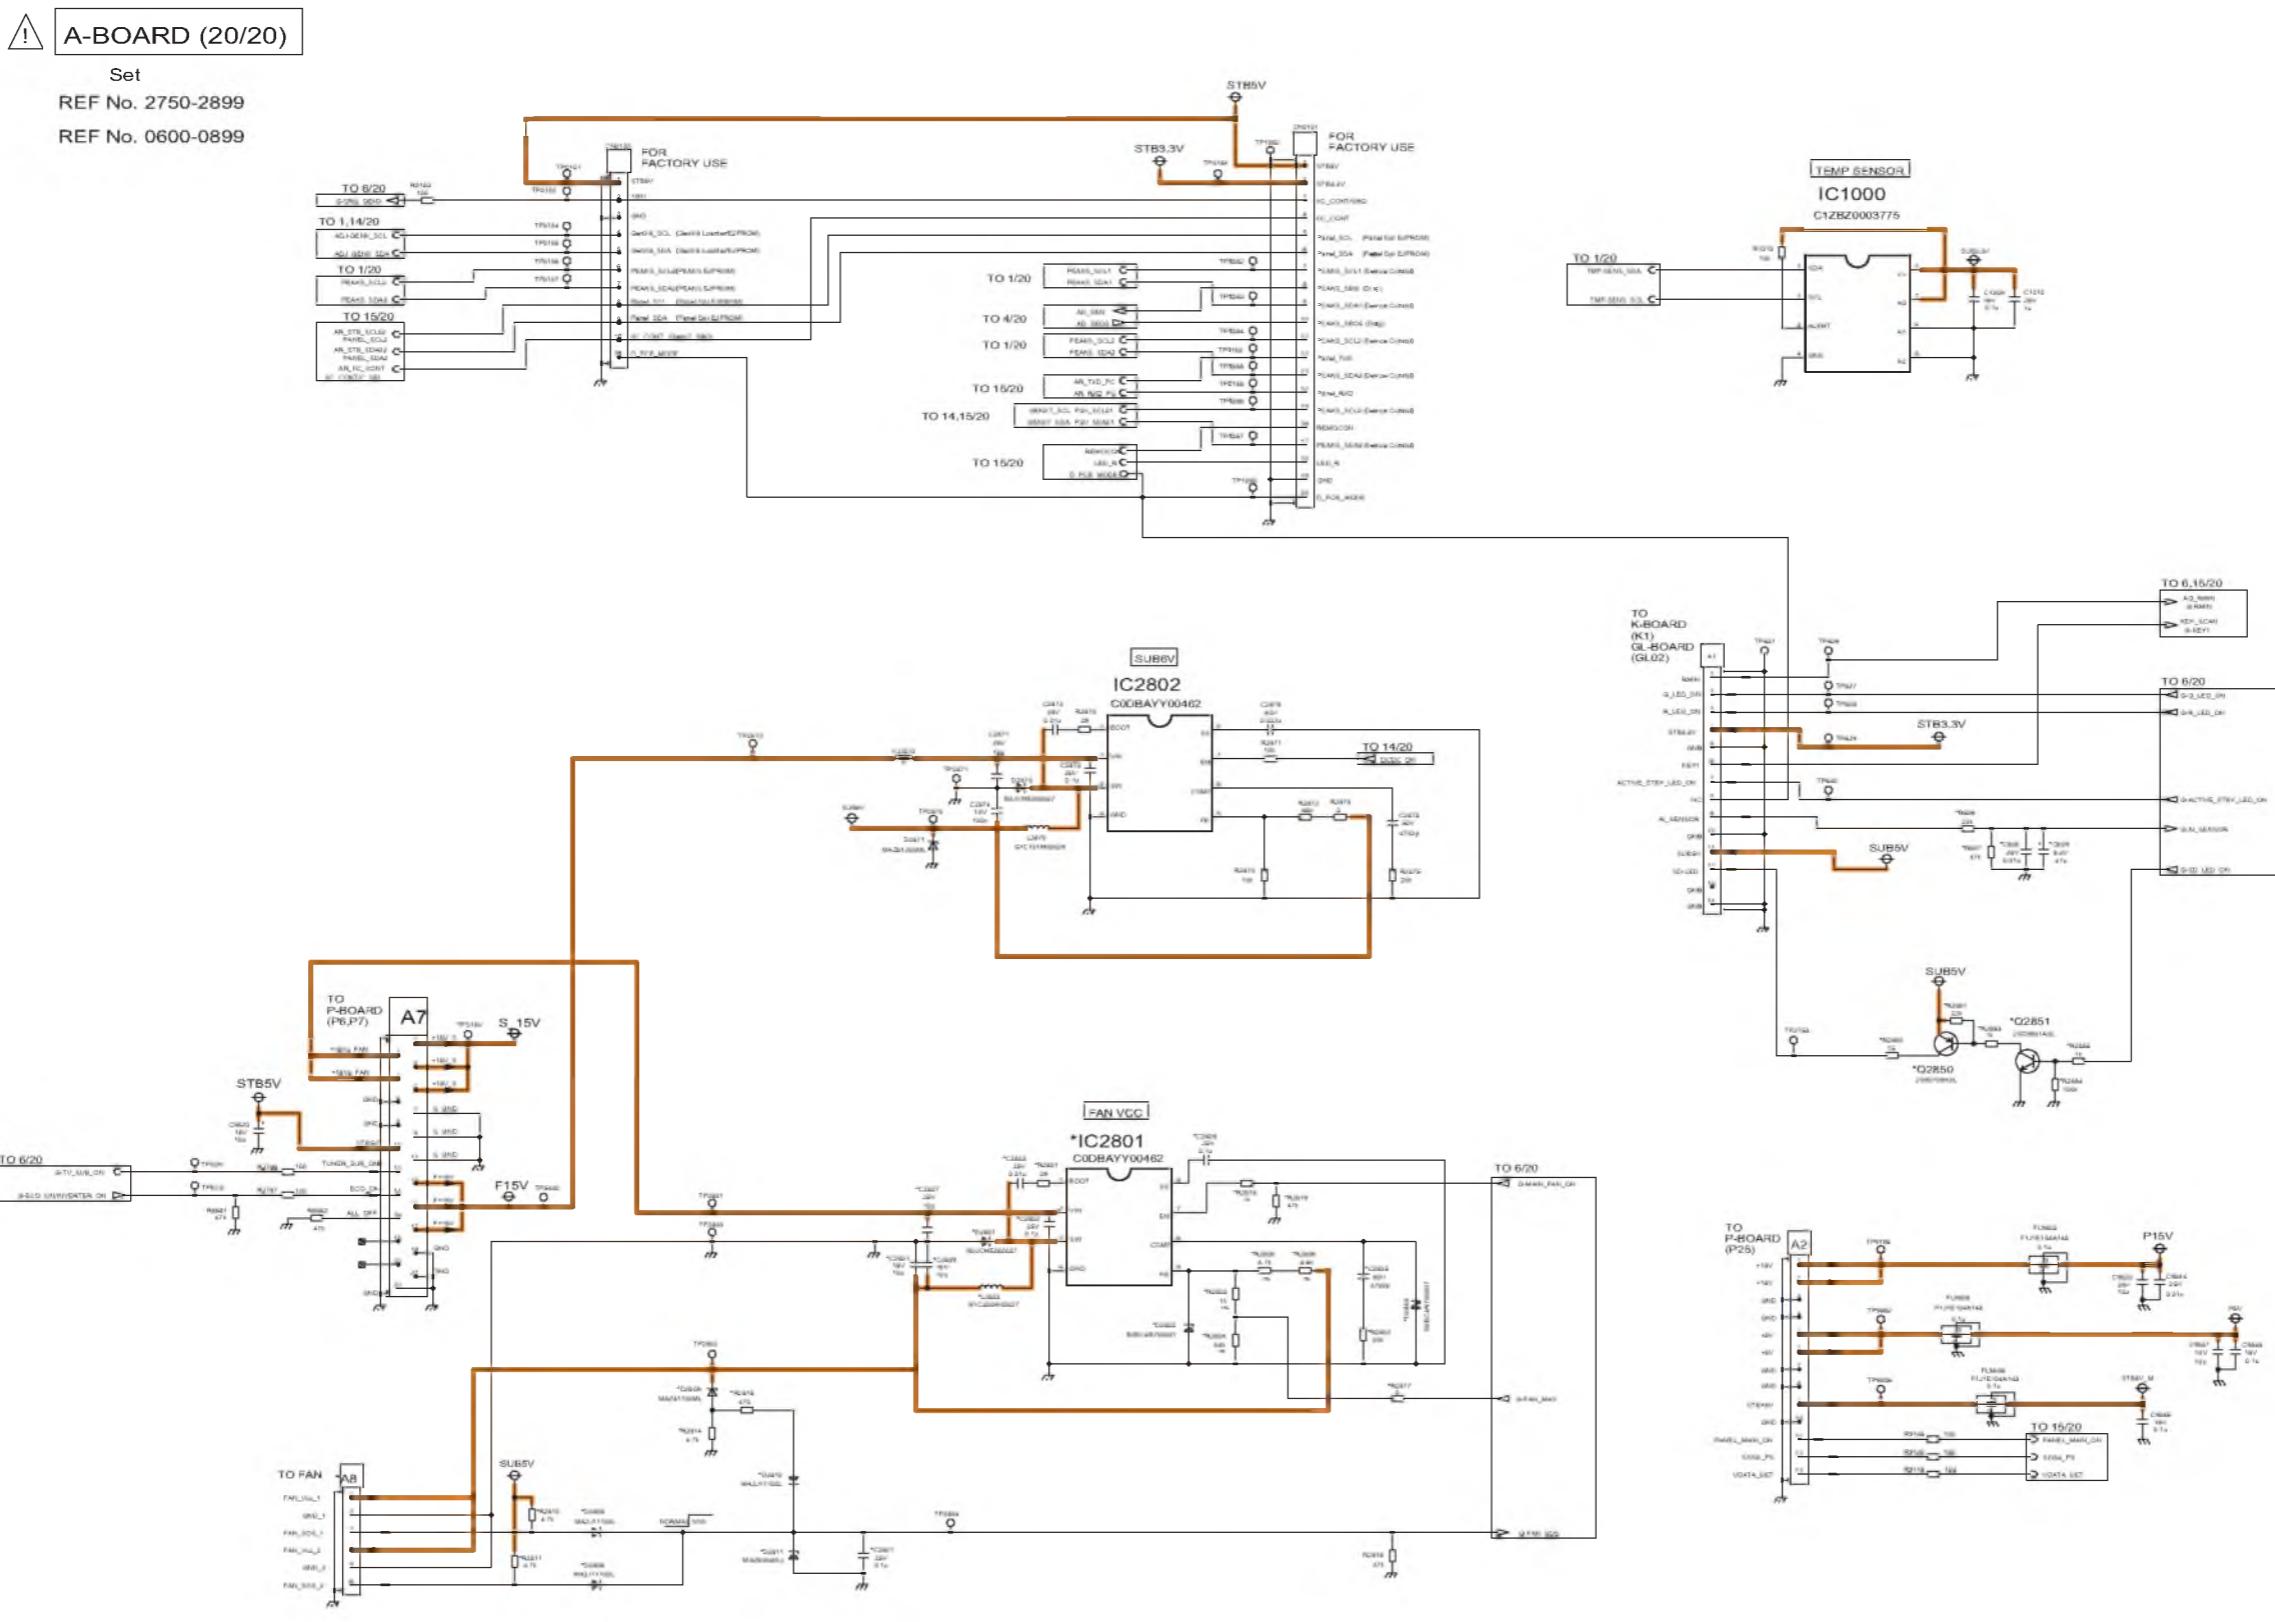


11.25. C1-Board (1/2) Schematic Diagram

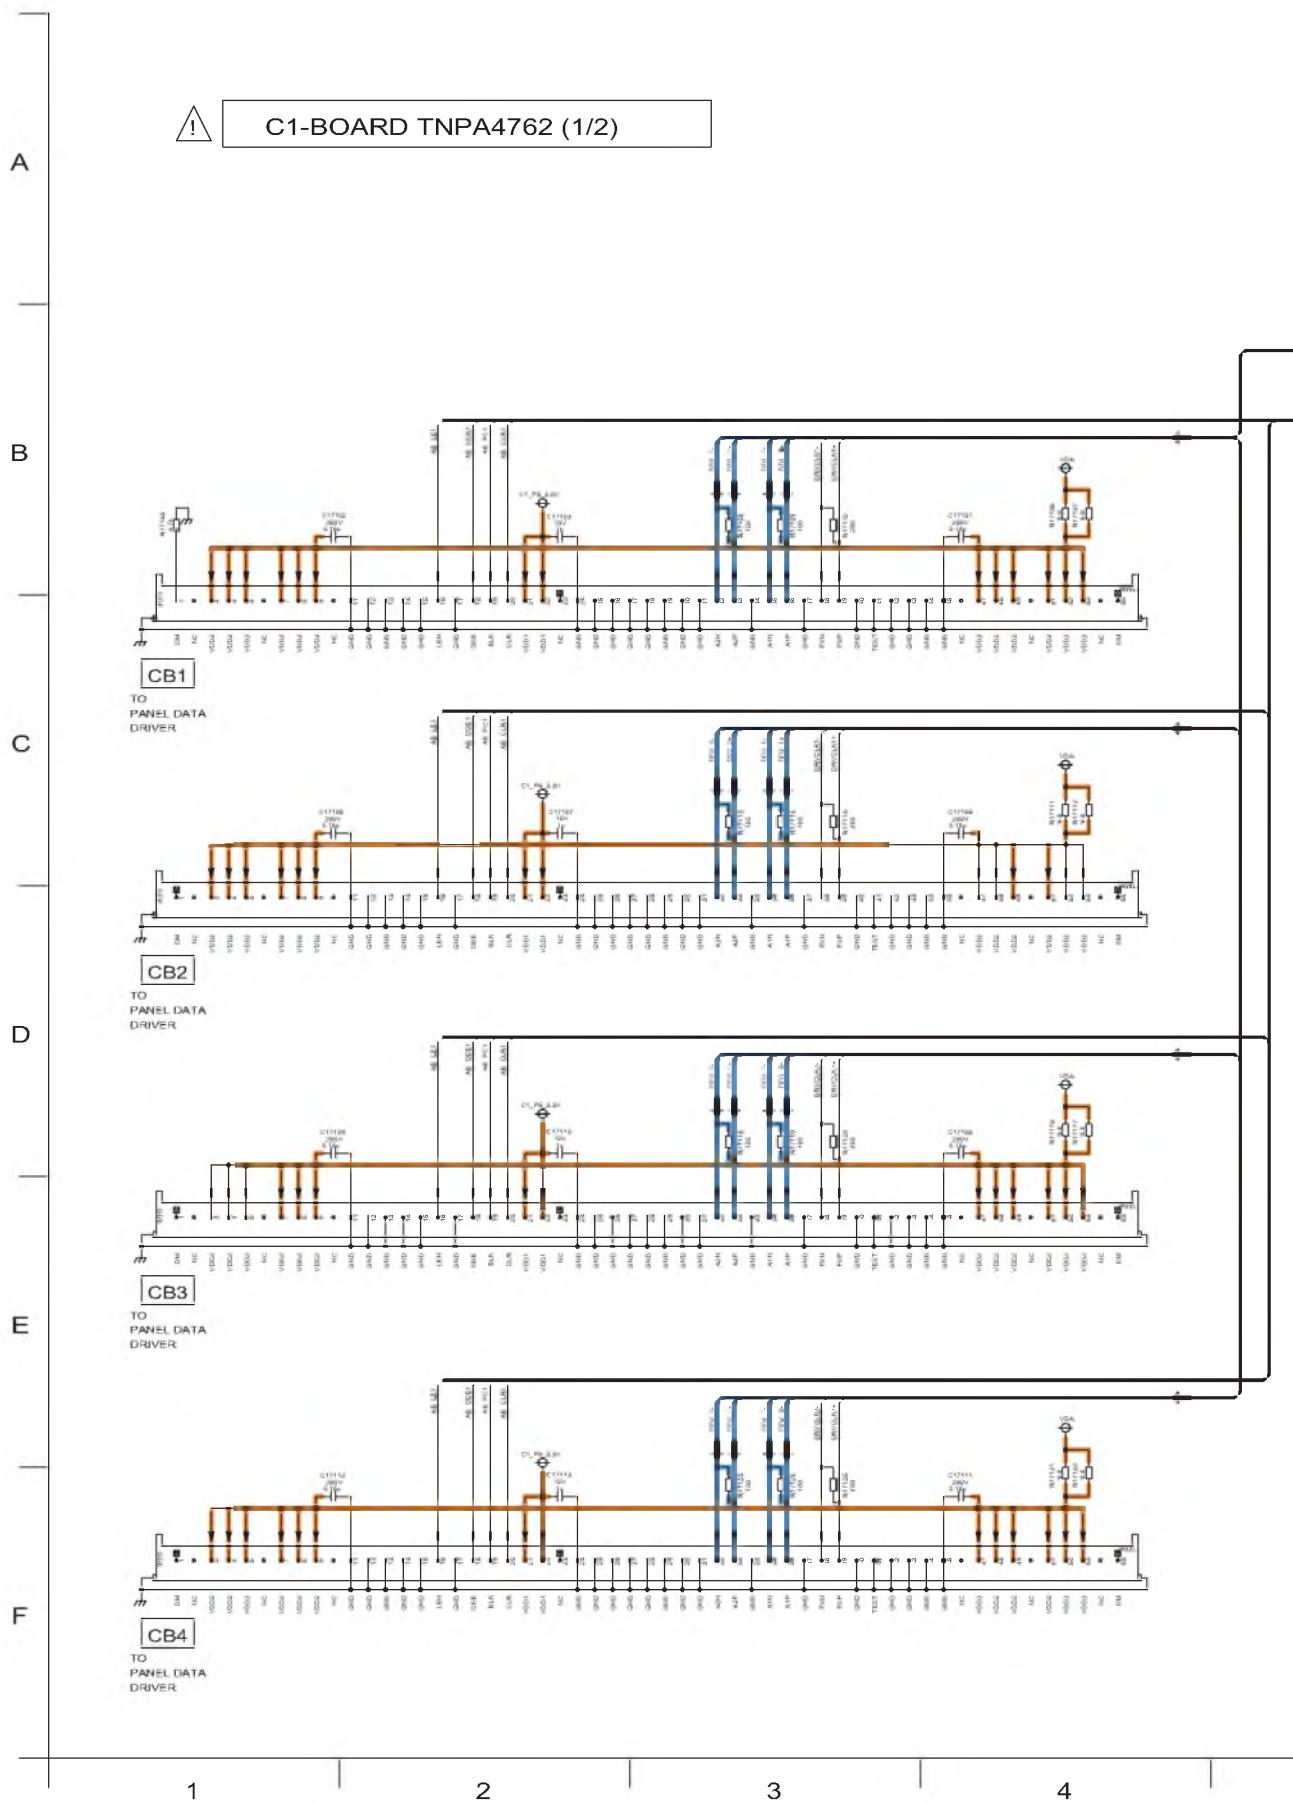


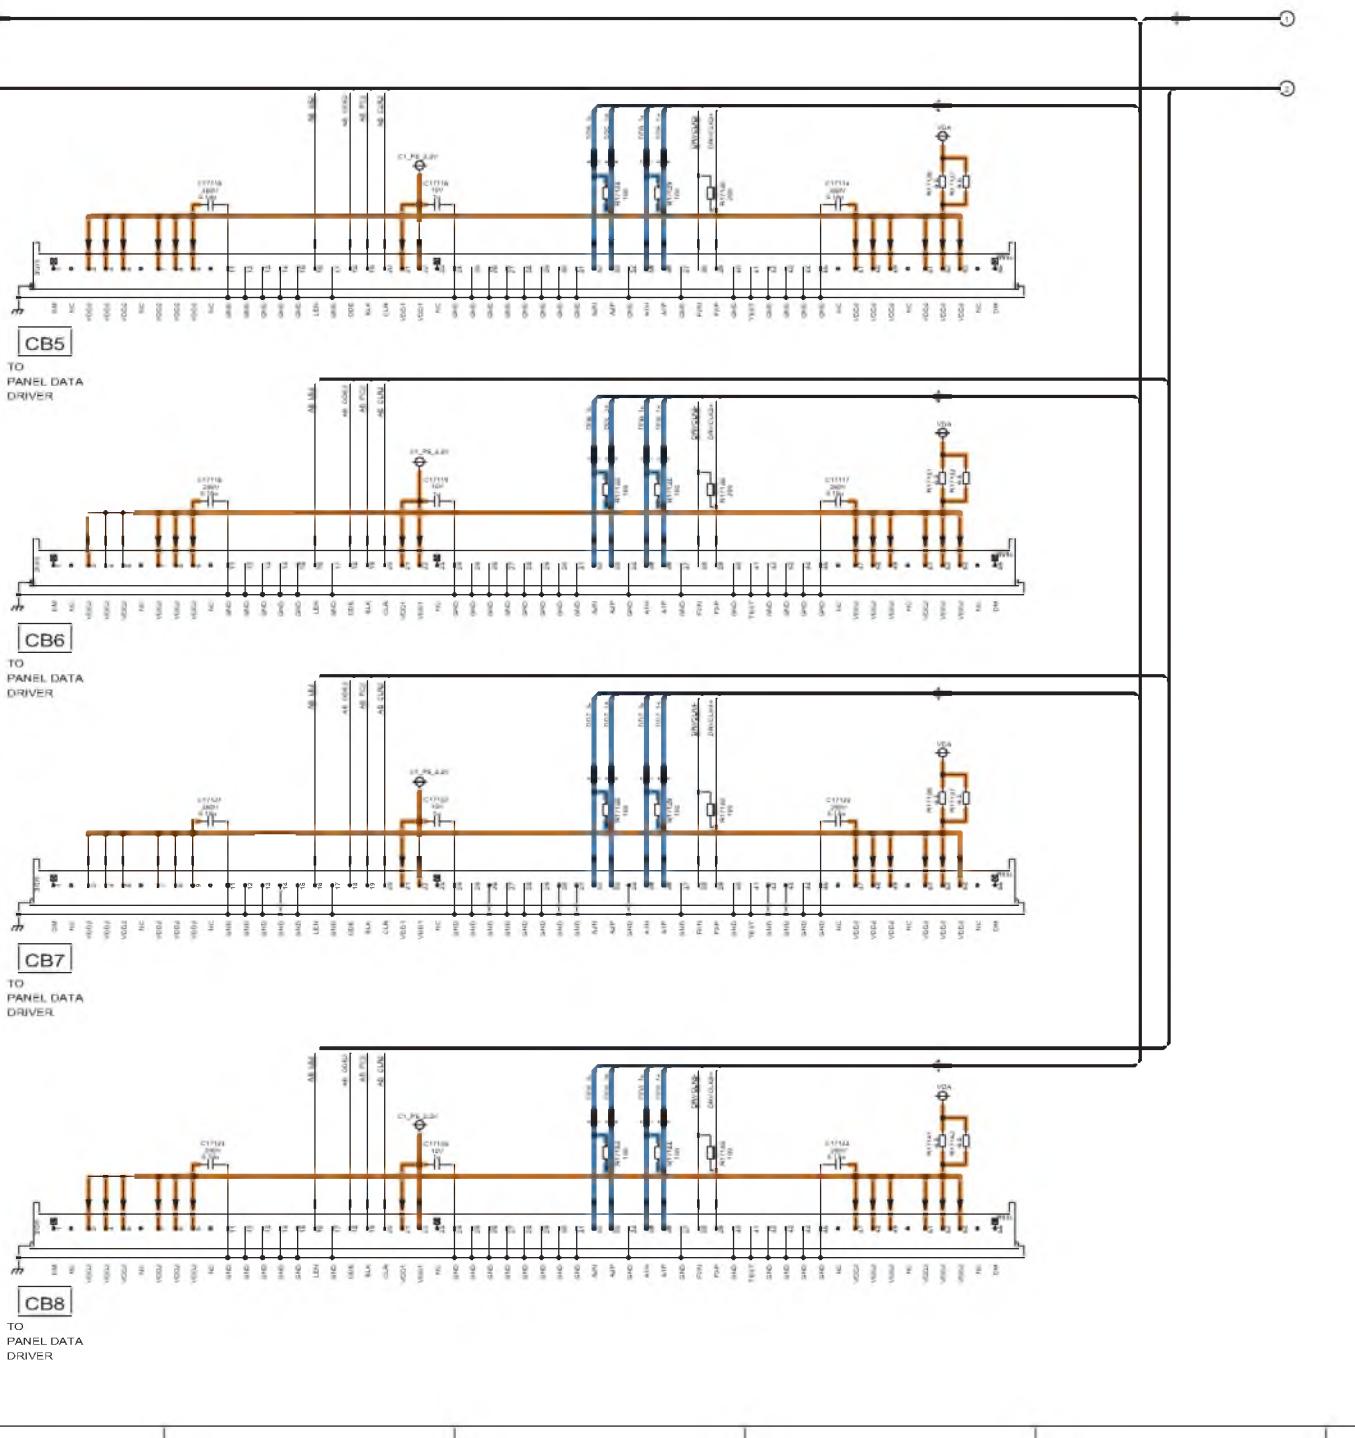

11.26. C1-Board (2/2) Schematic Diagram

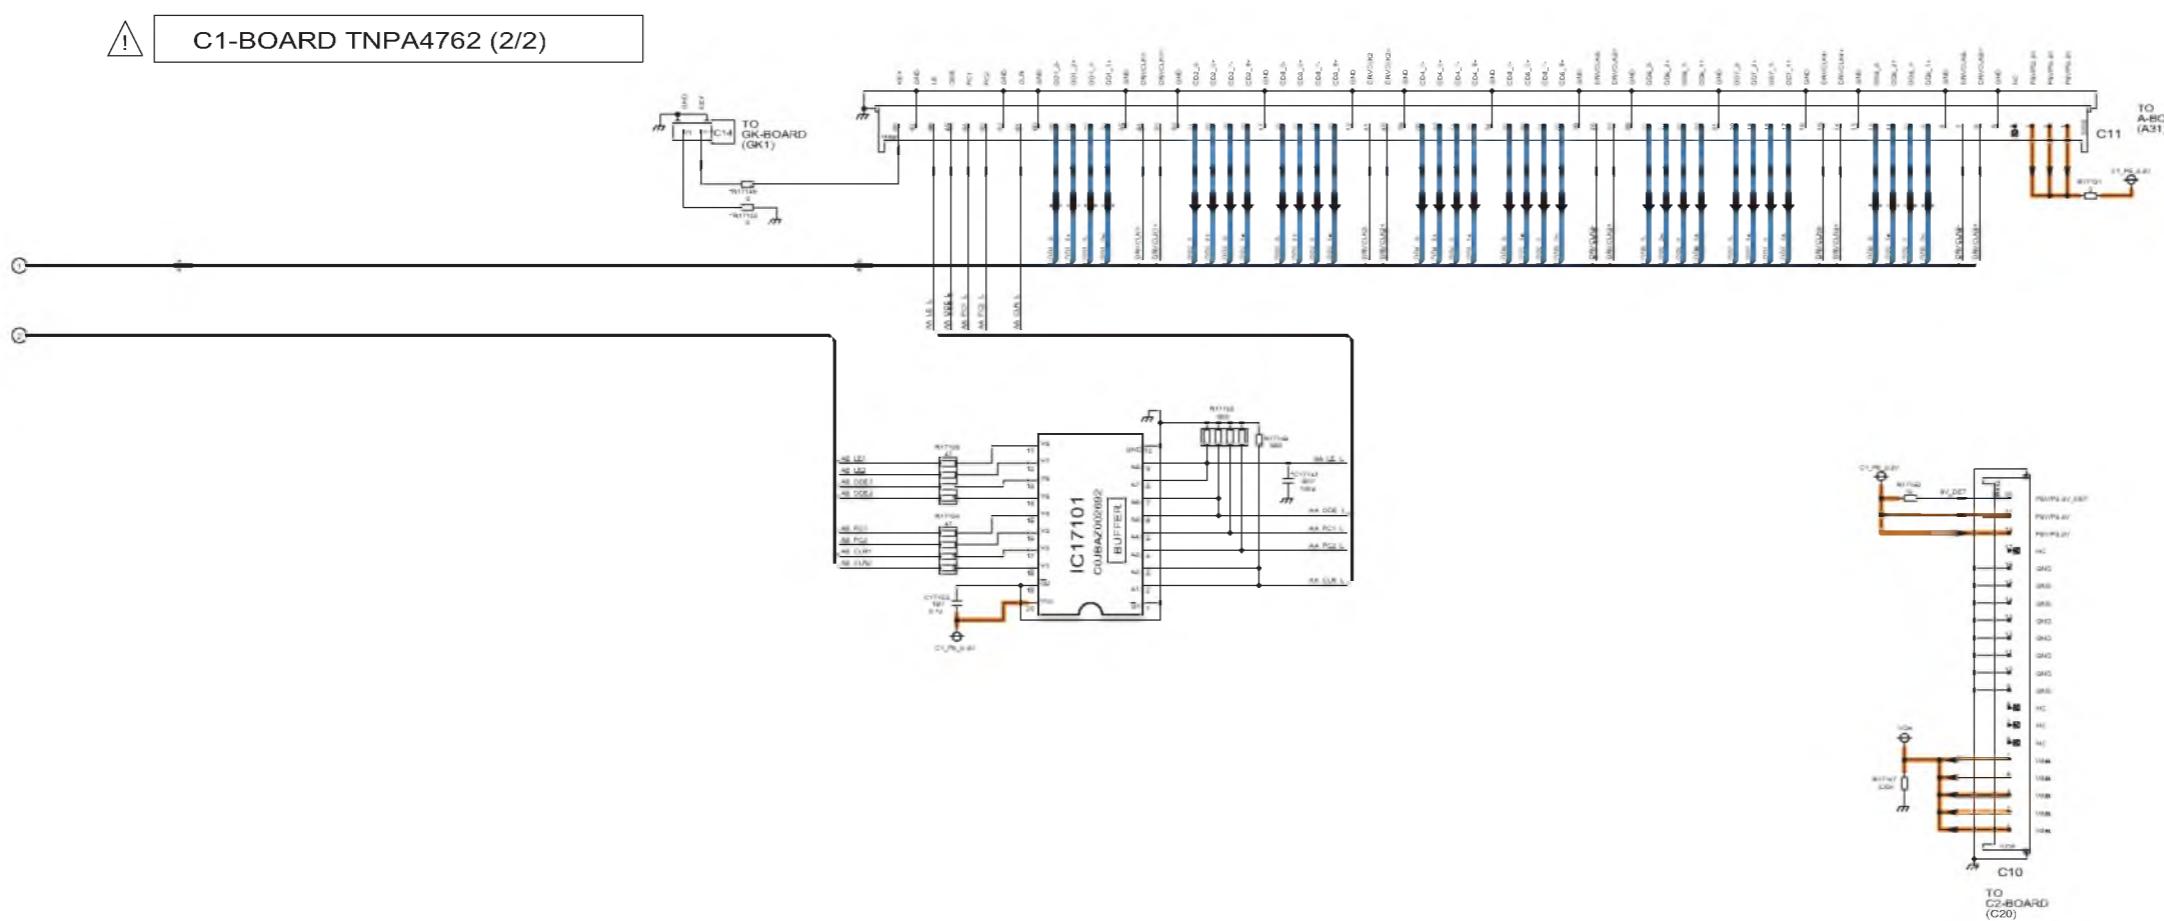


11.27. C2-Board (1/2) Schematic Diagram

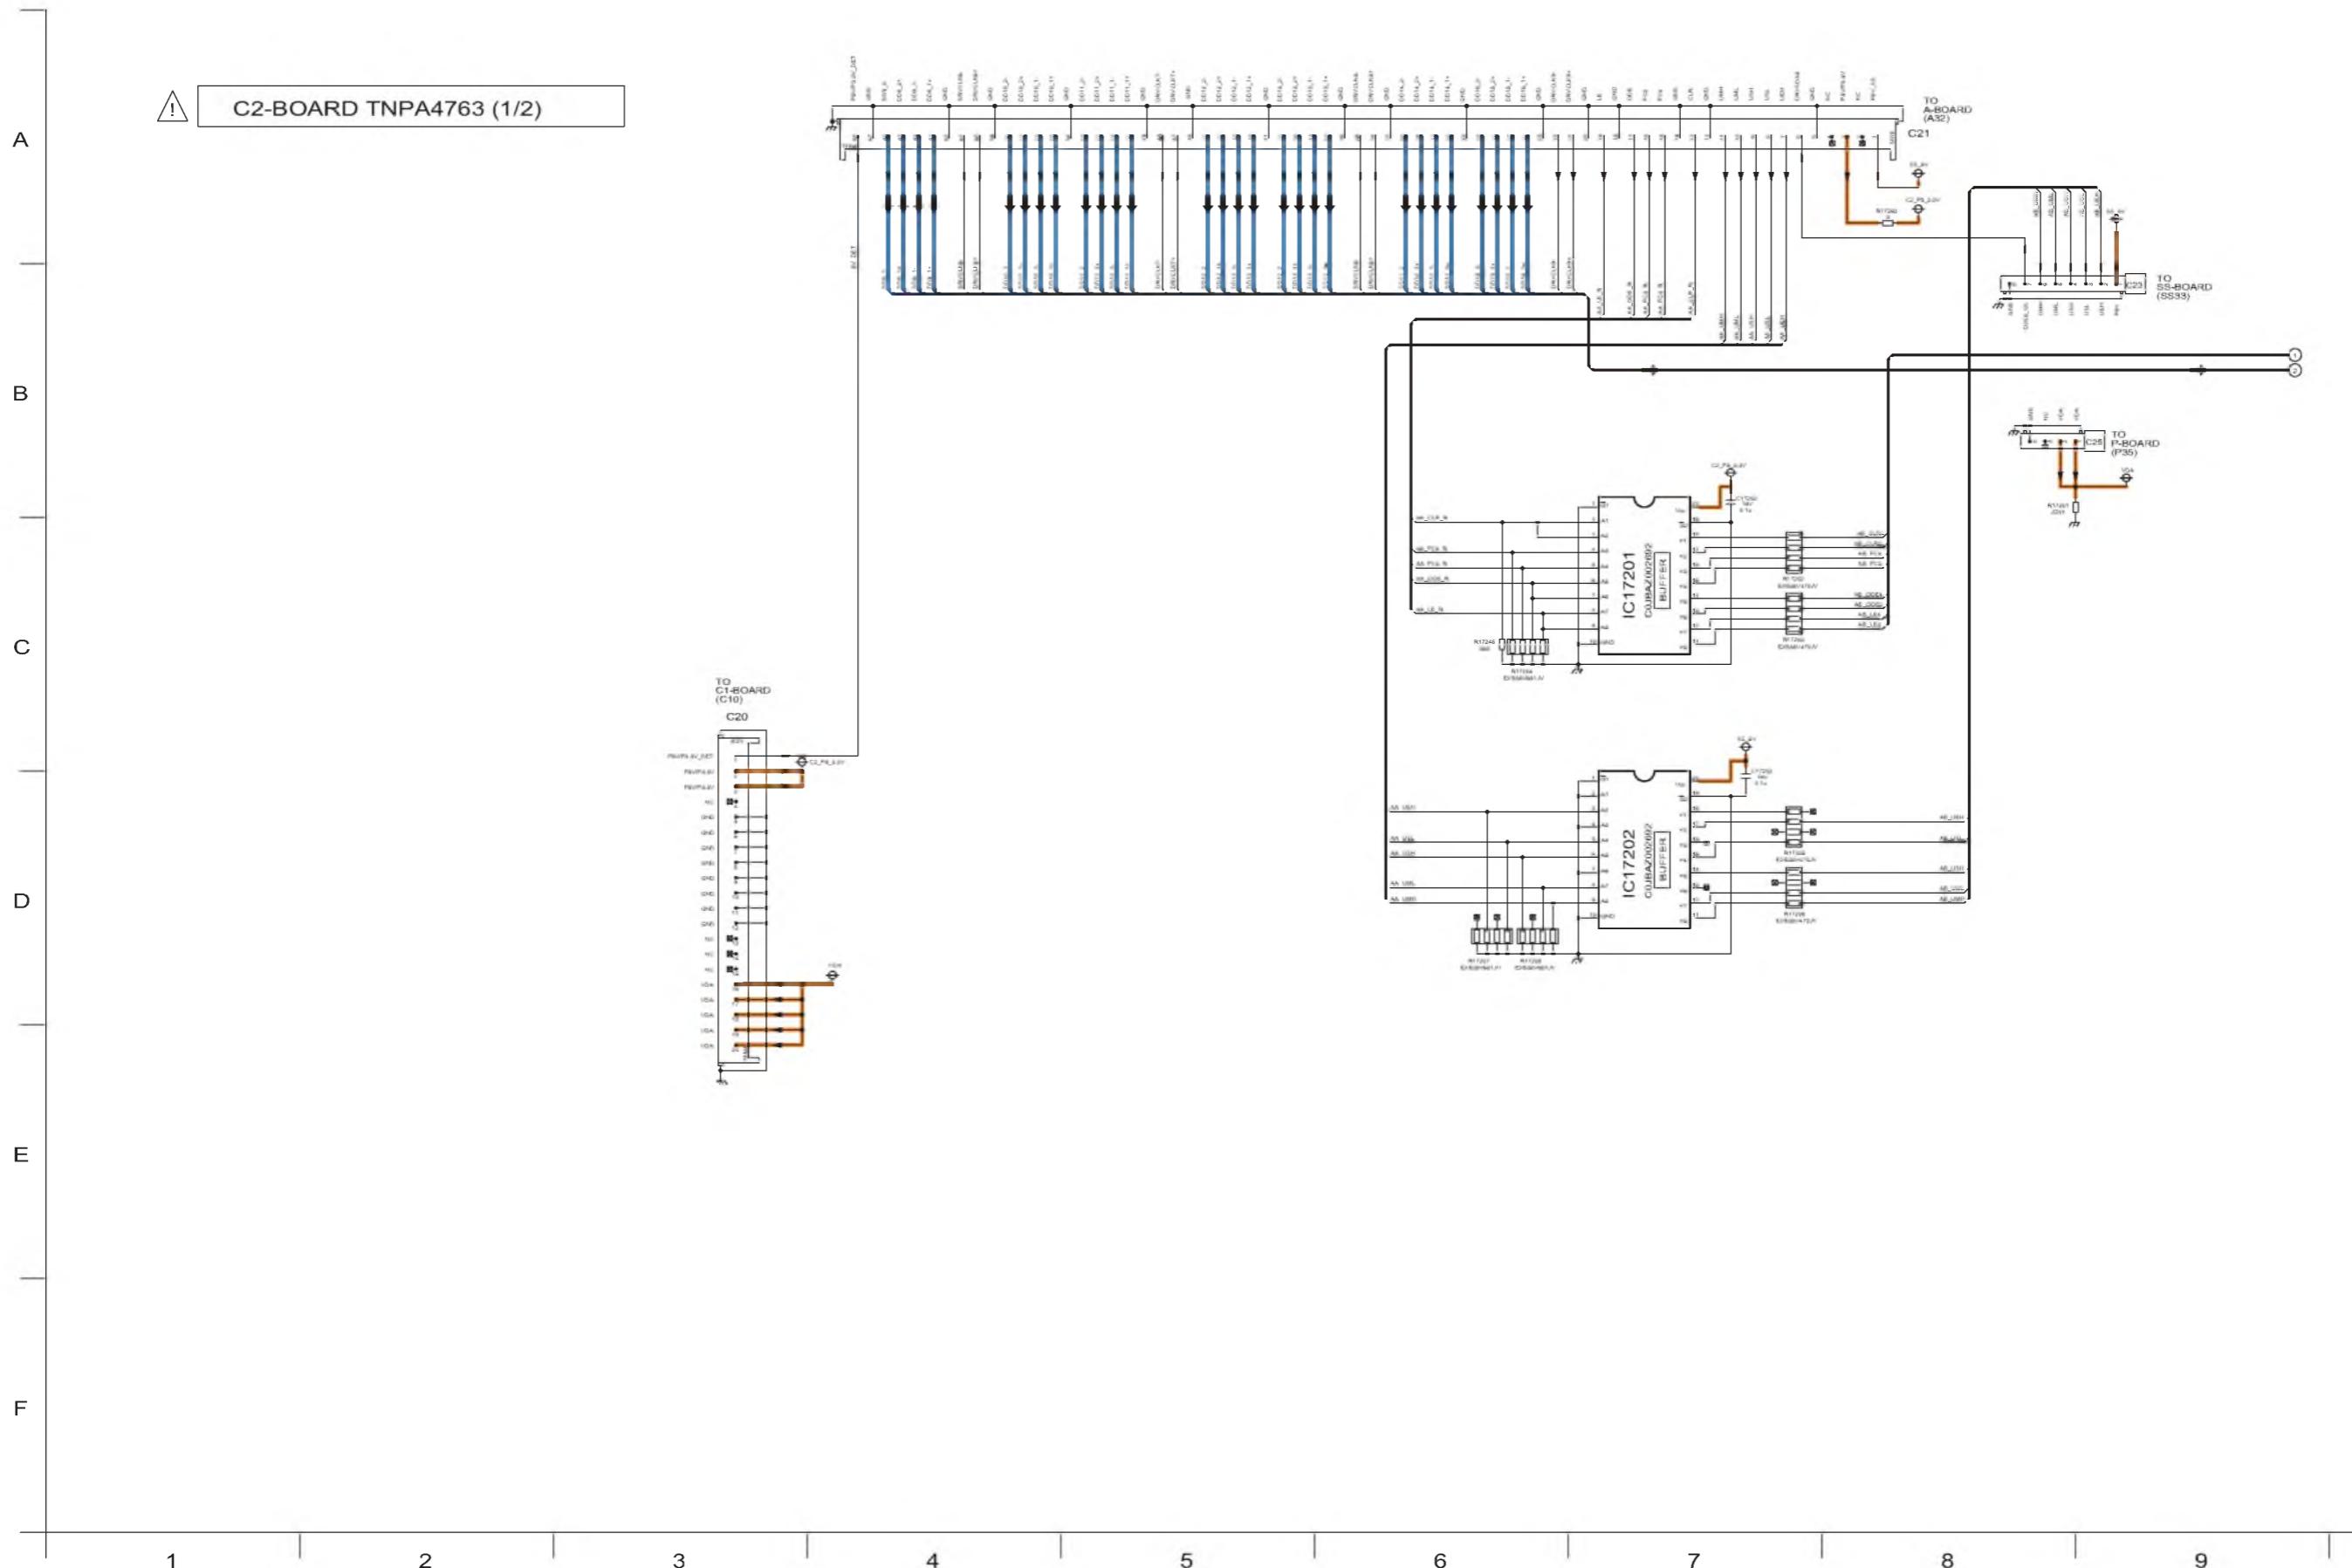


11.28. C2-Board (2/2) Schematic Diagram




C2-BOARD TNPA4763 (2/2)

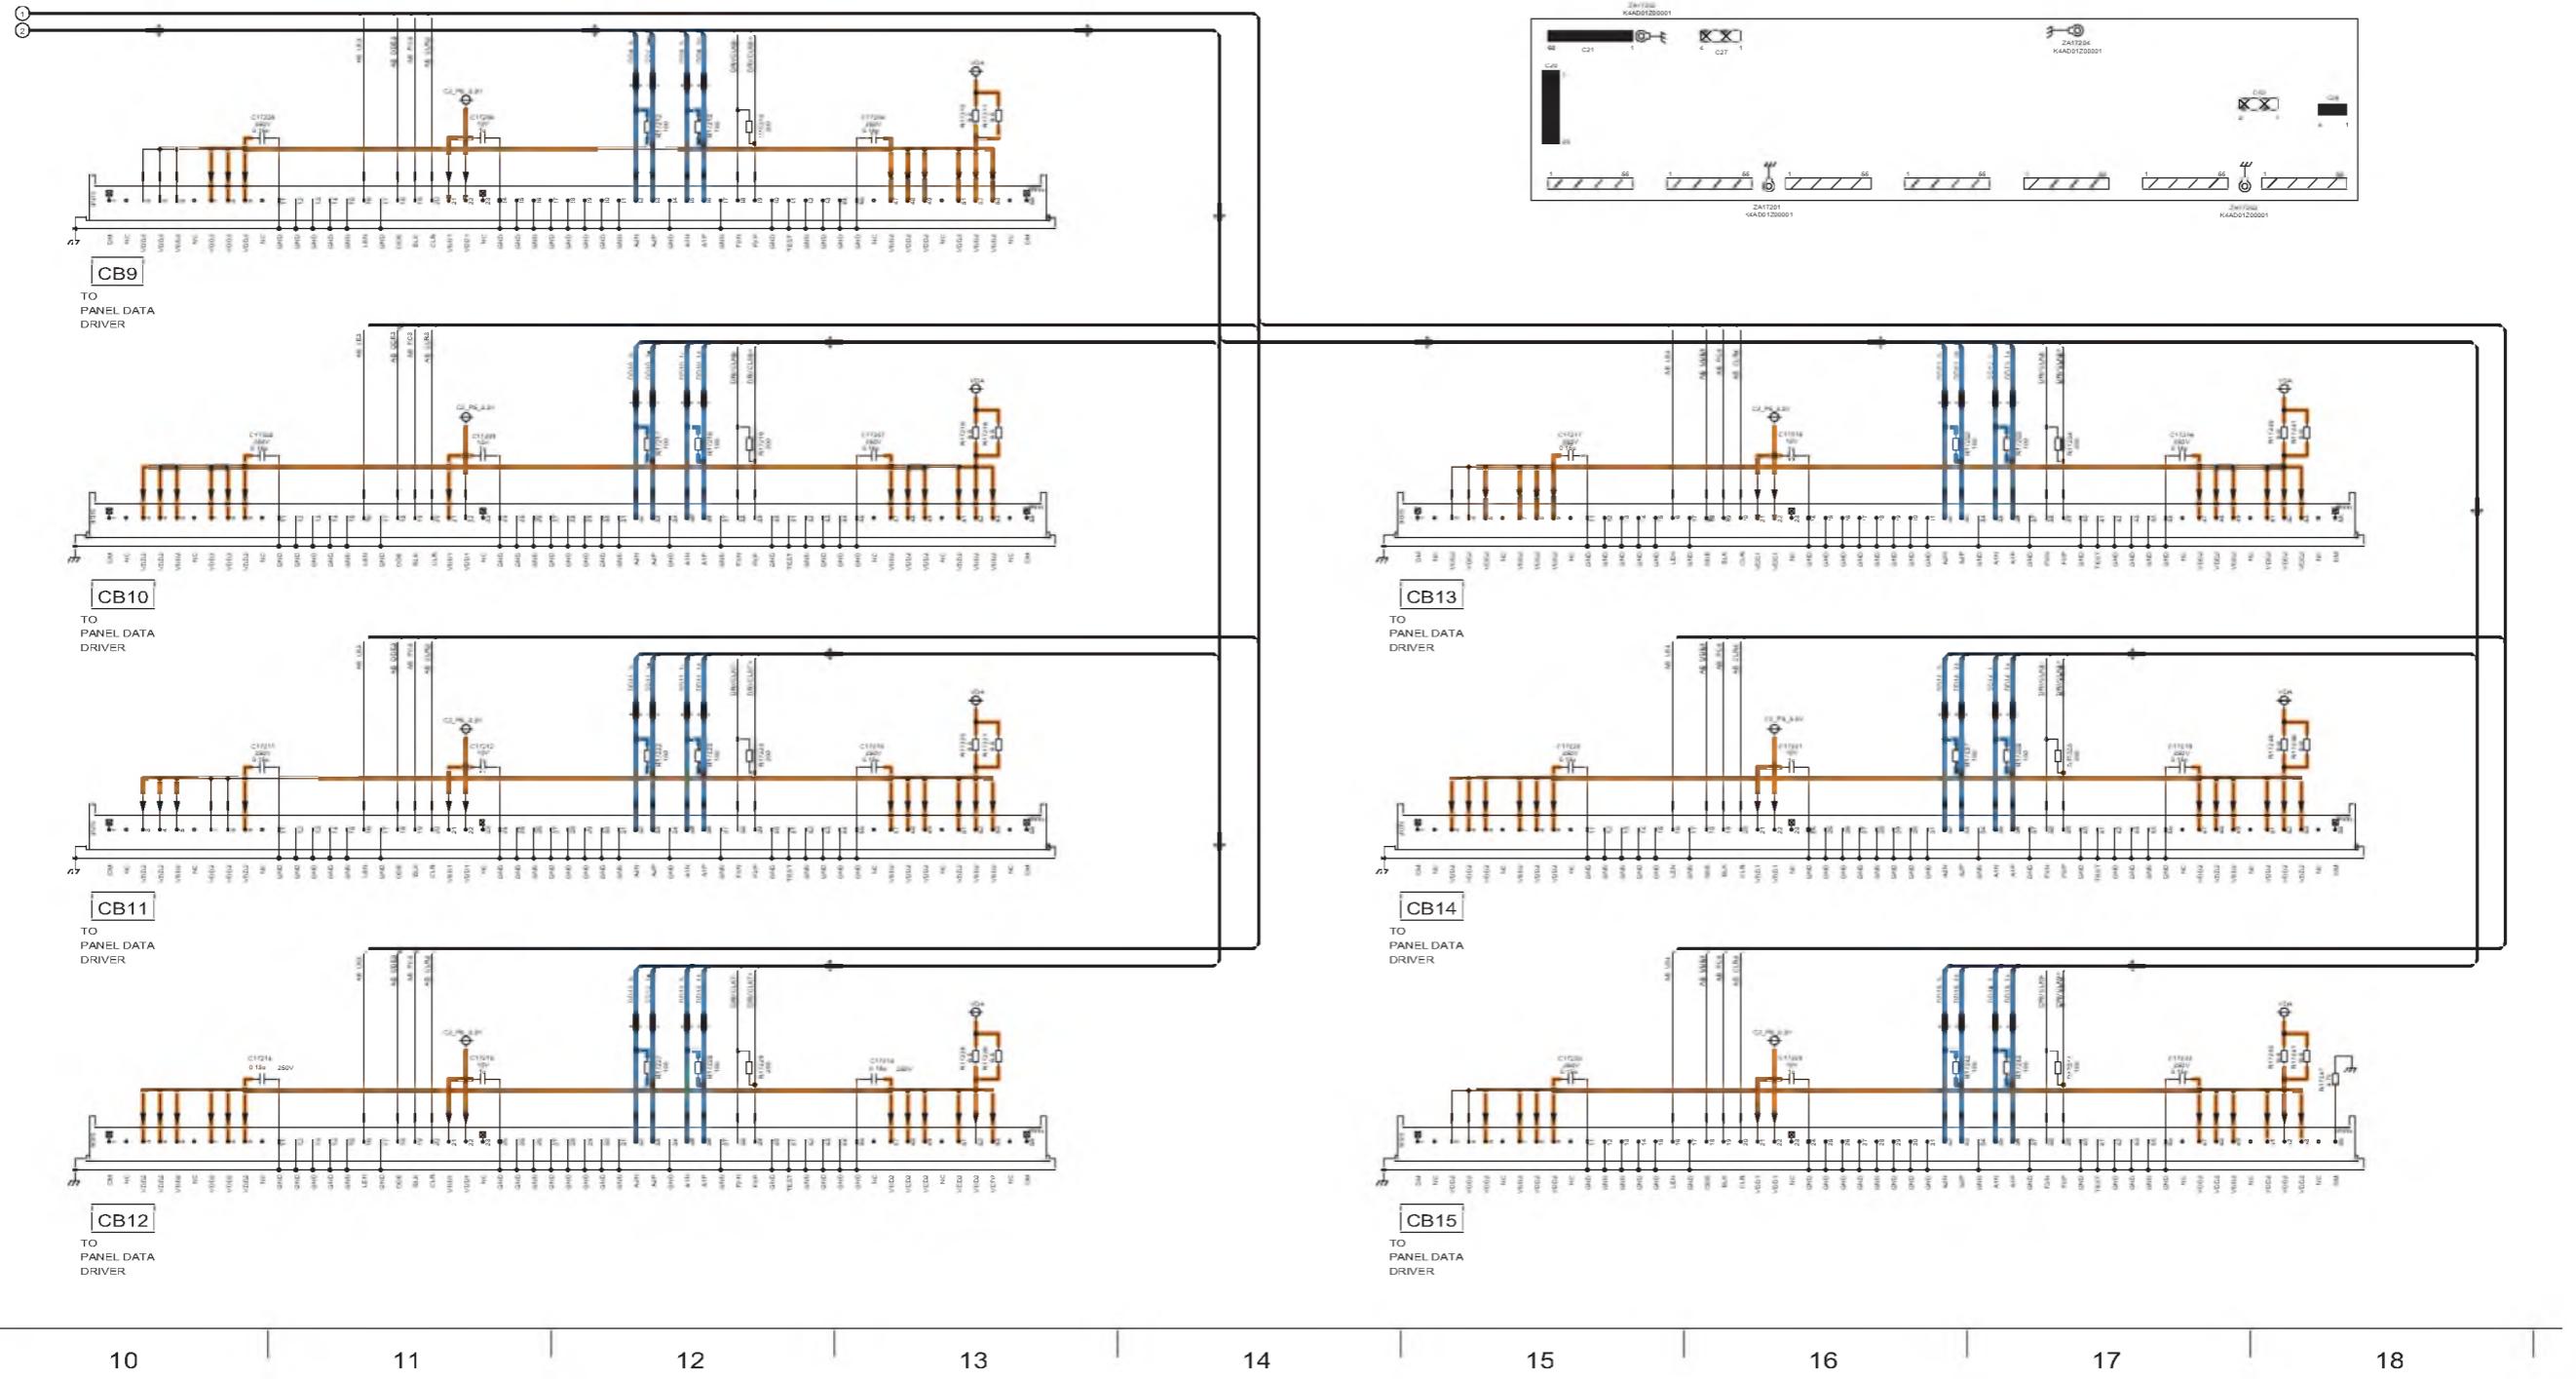


11.29. SC-Board (1/4) Schematic Diagram

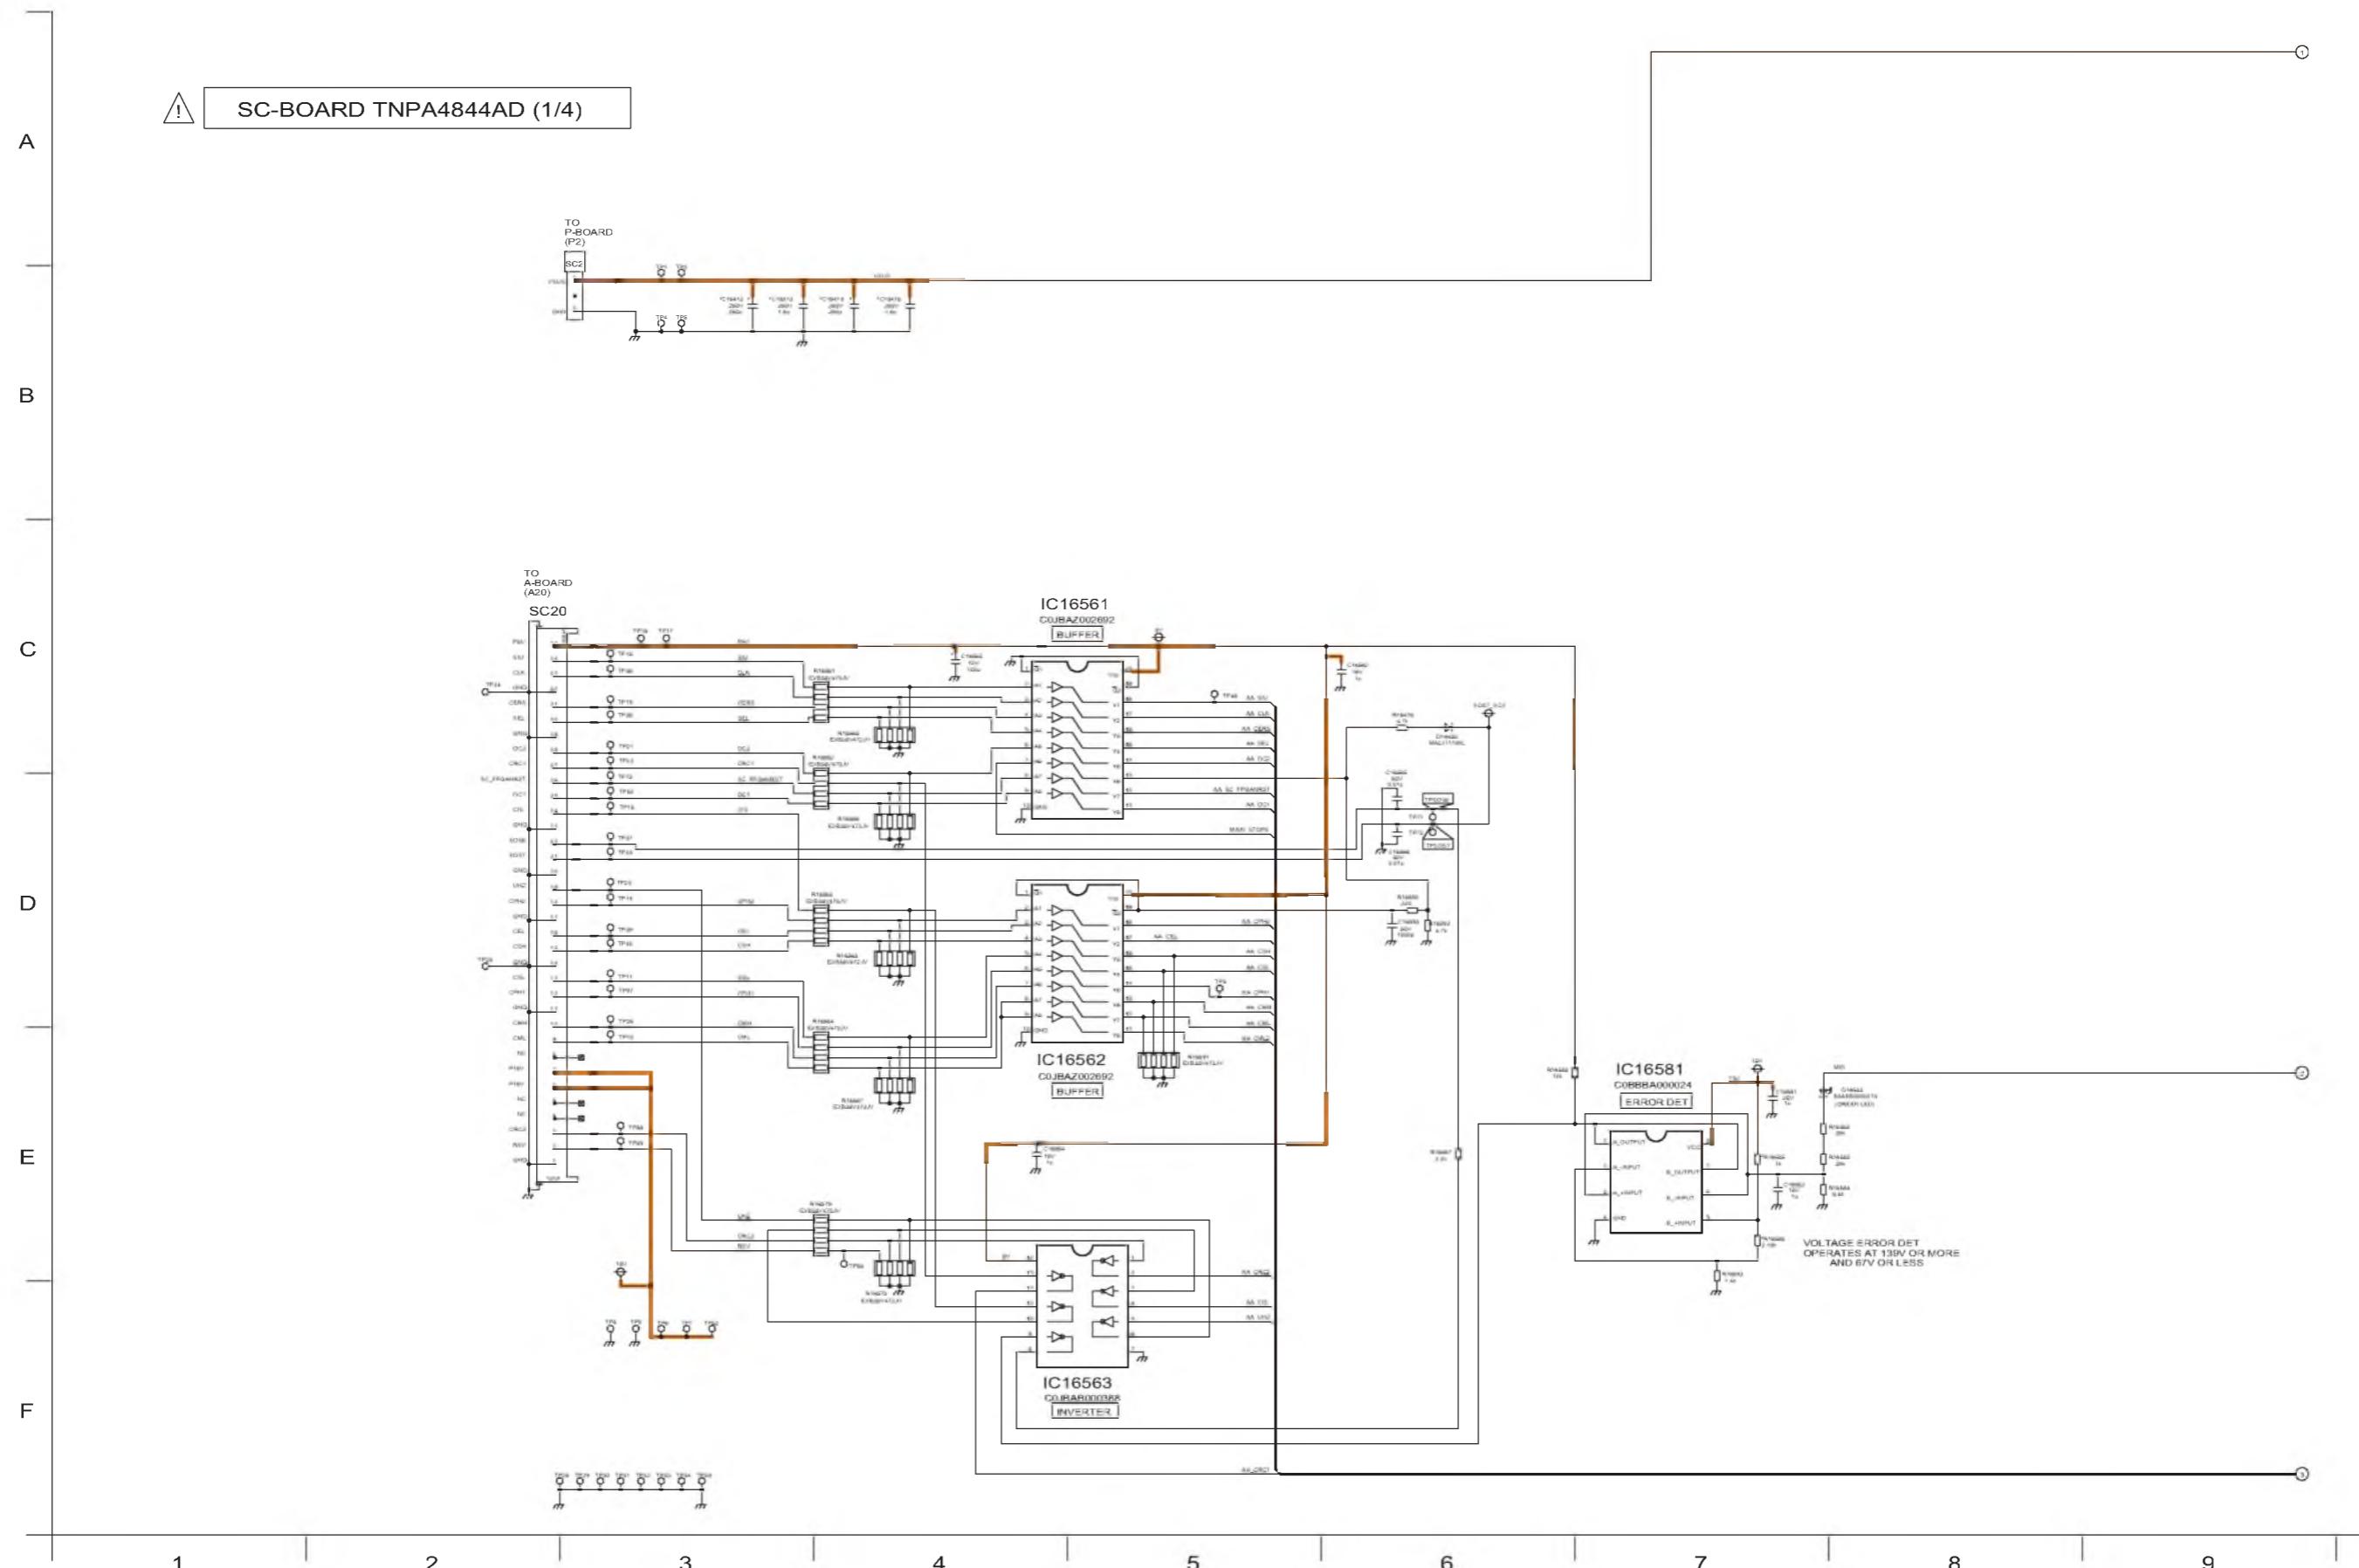


11.30. SC-Board (2/4) Schematic Diagram

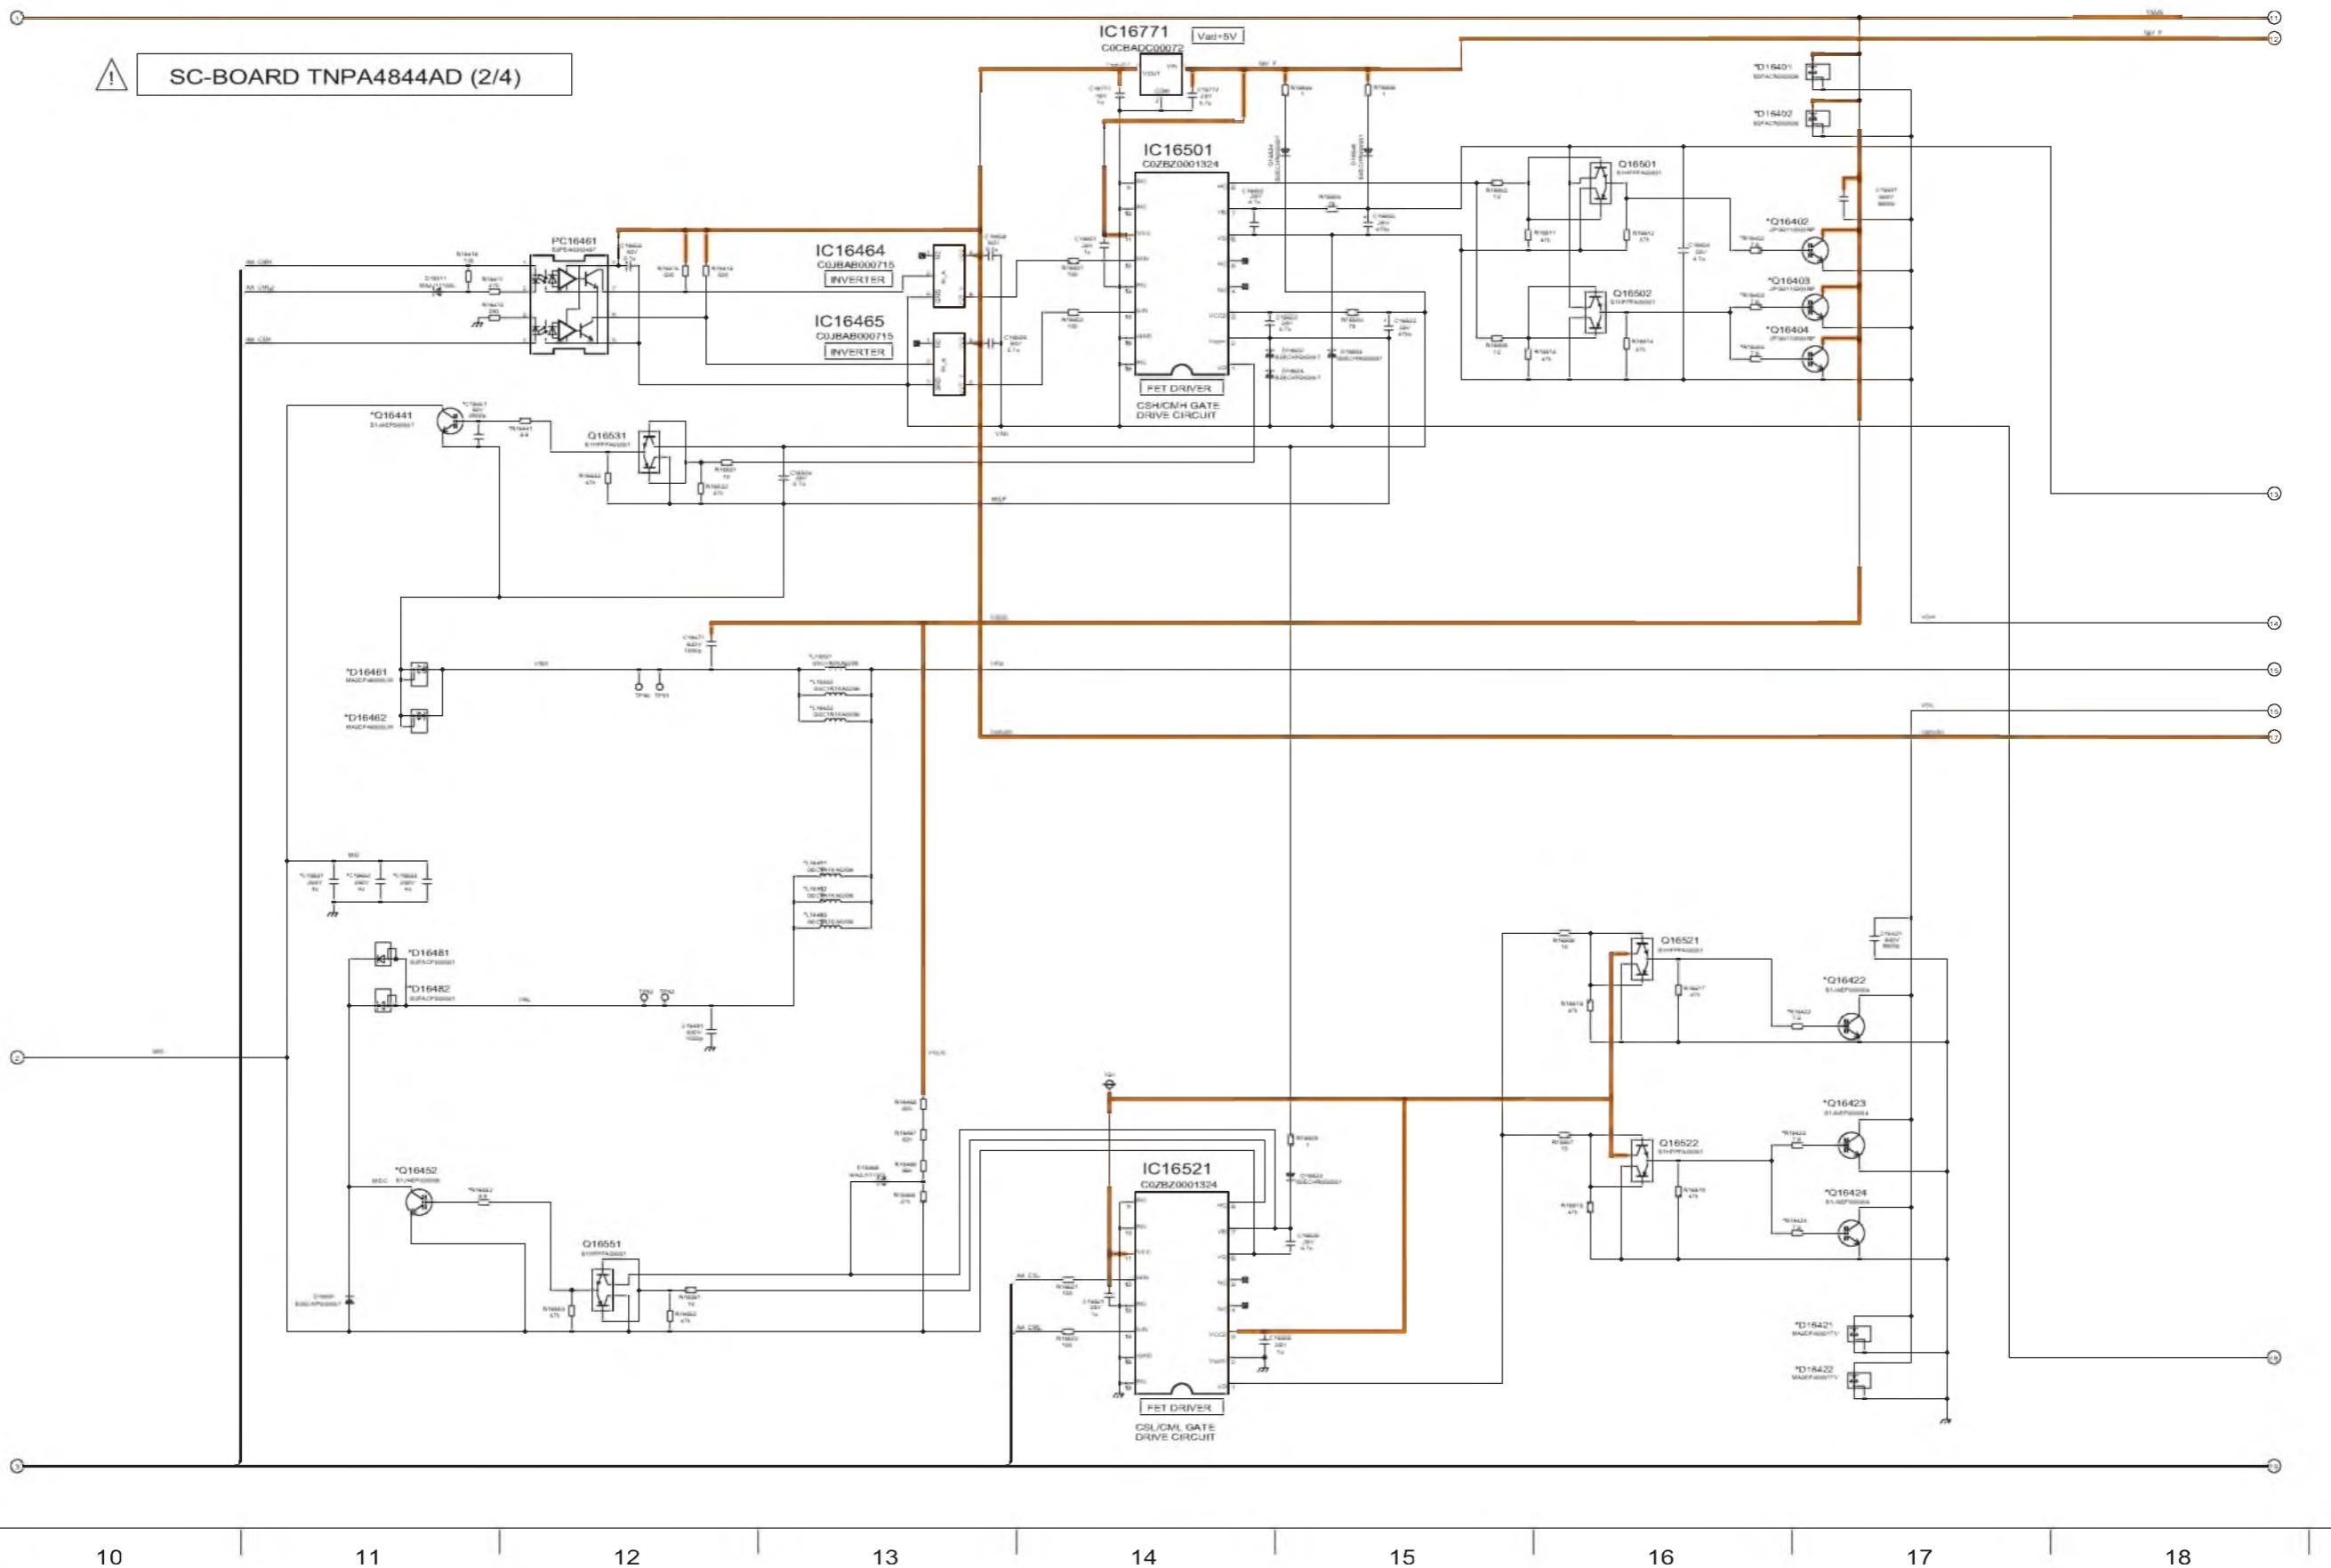


11.31. SC-Board (3/4) Schematic Diagram

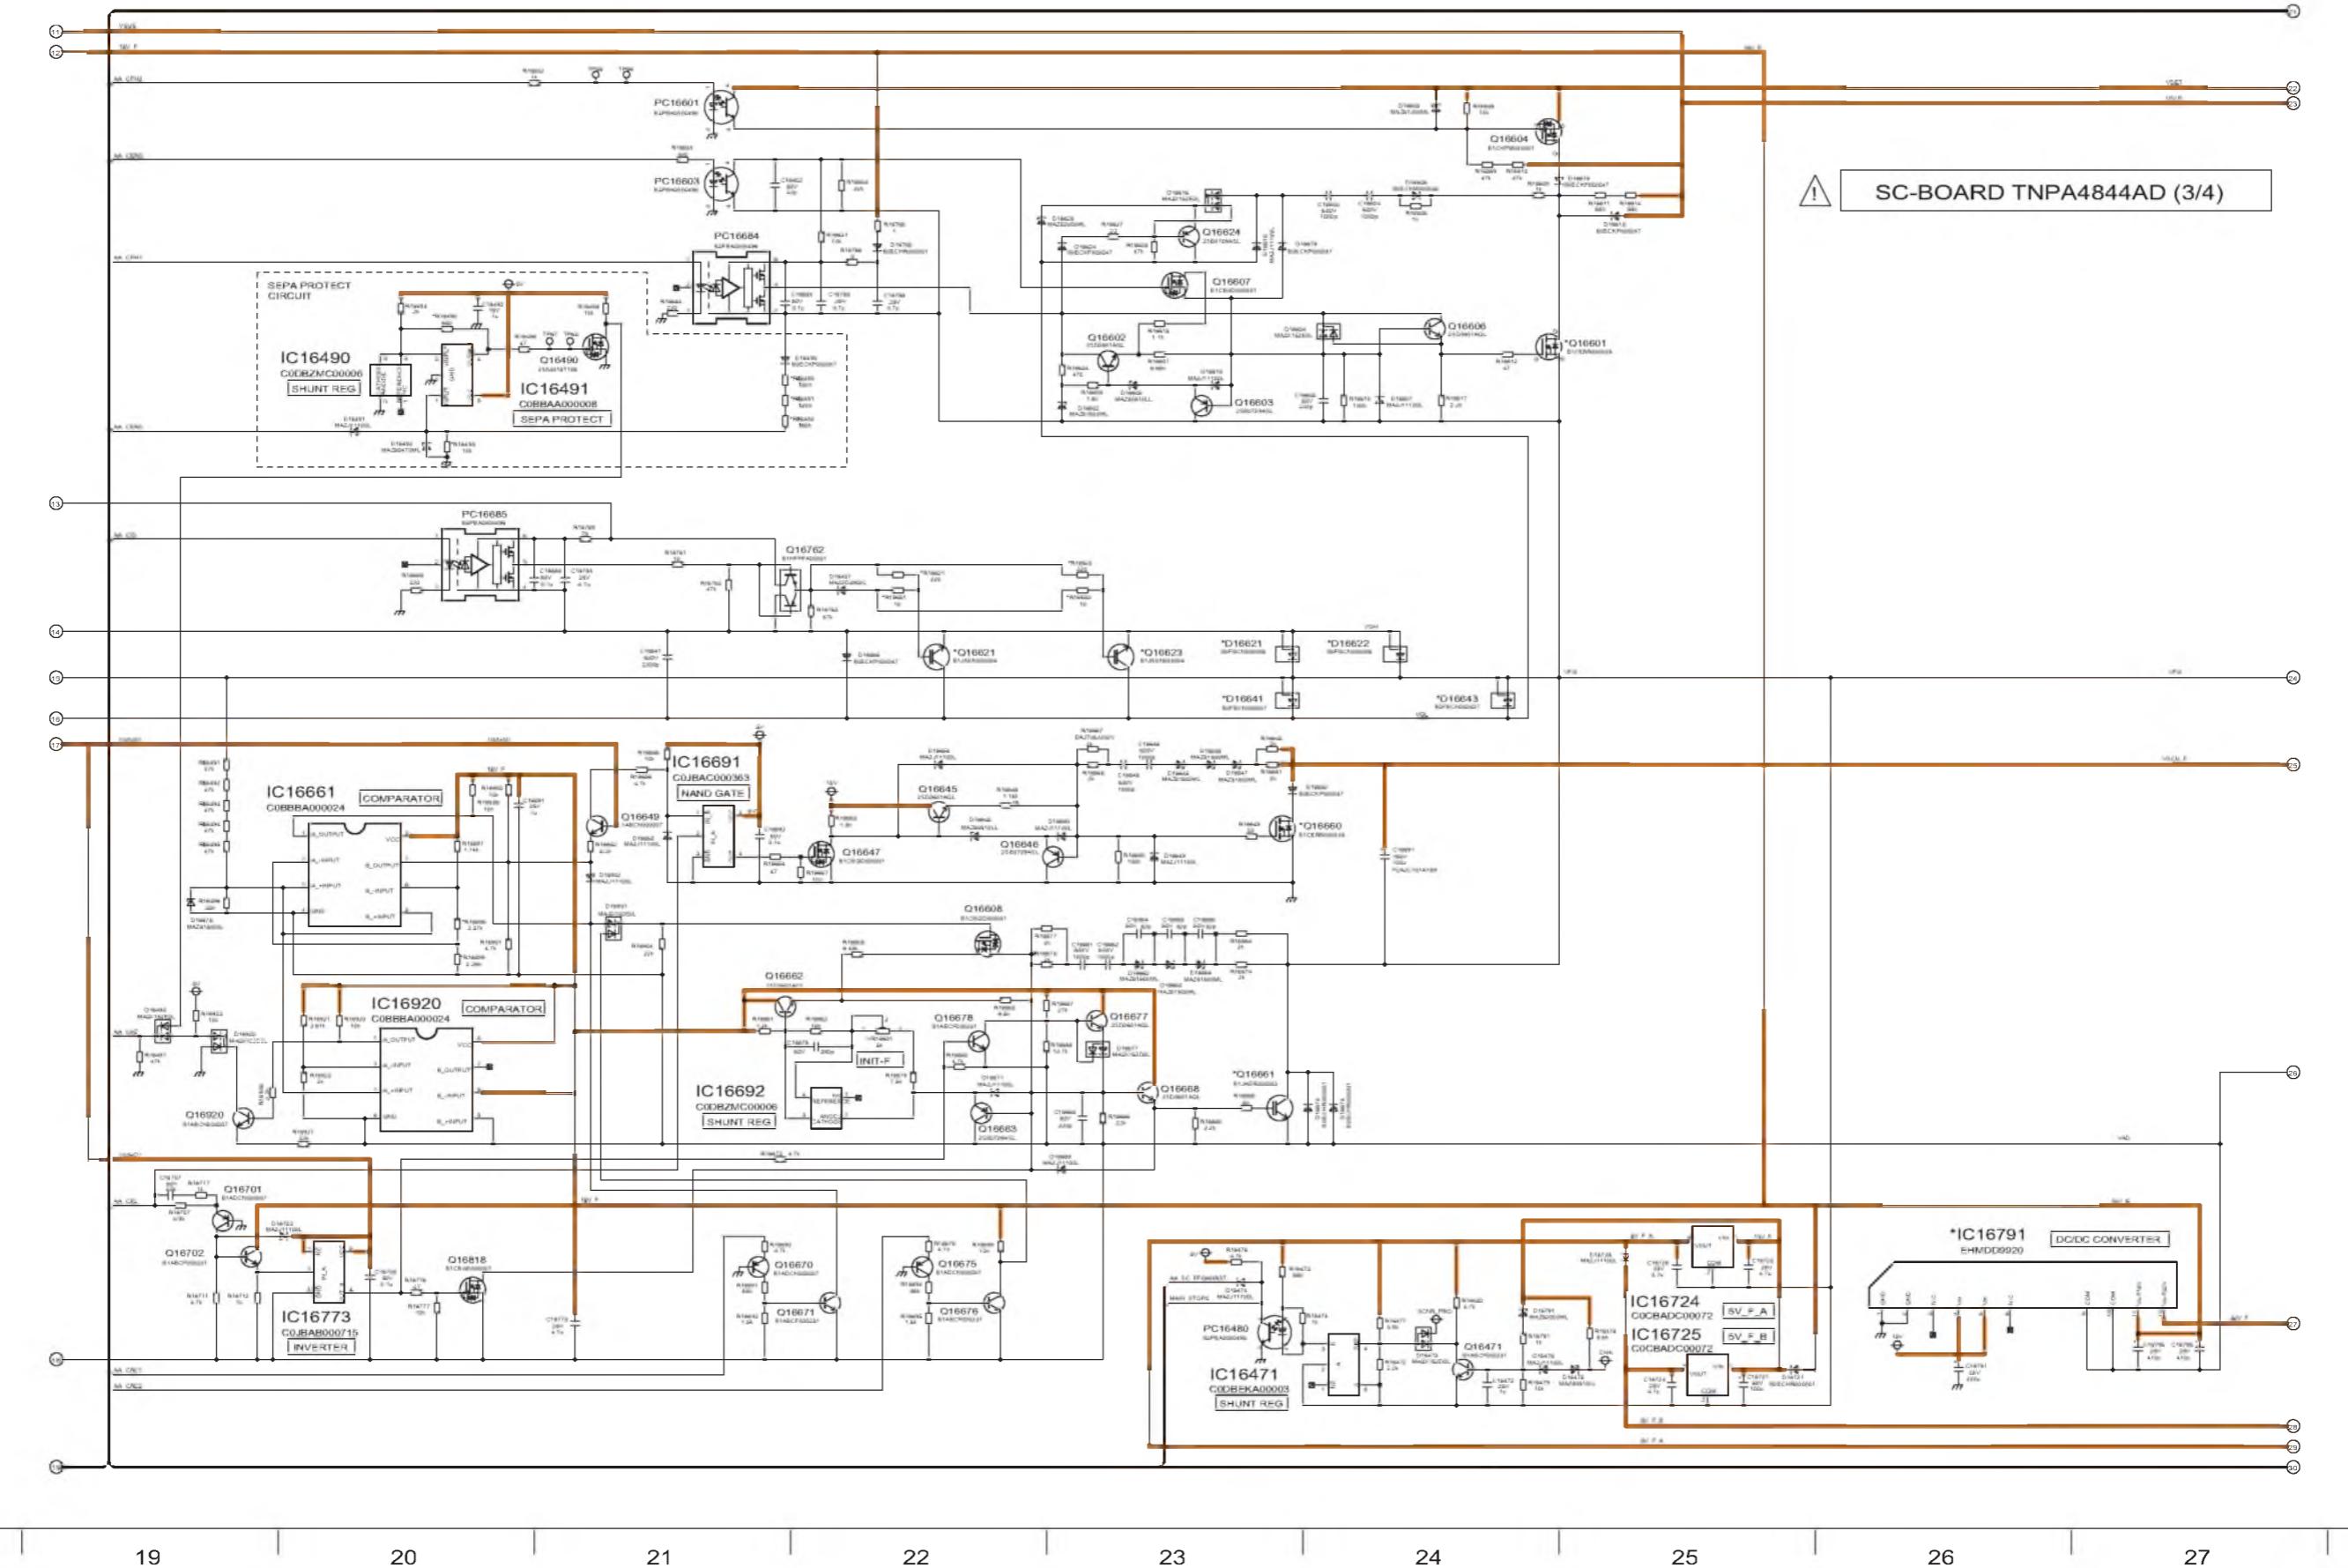


11.32. SC-Board (4/4) Schematic Diagram

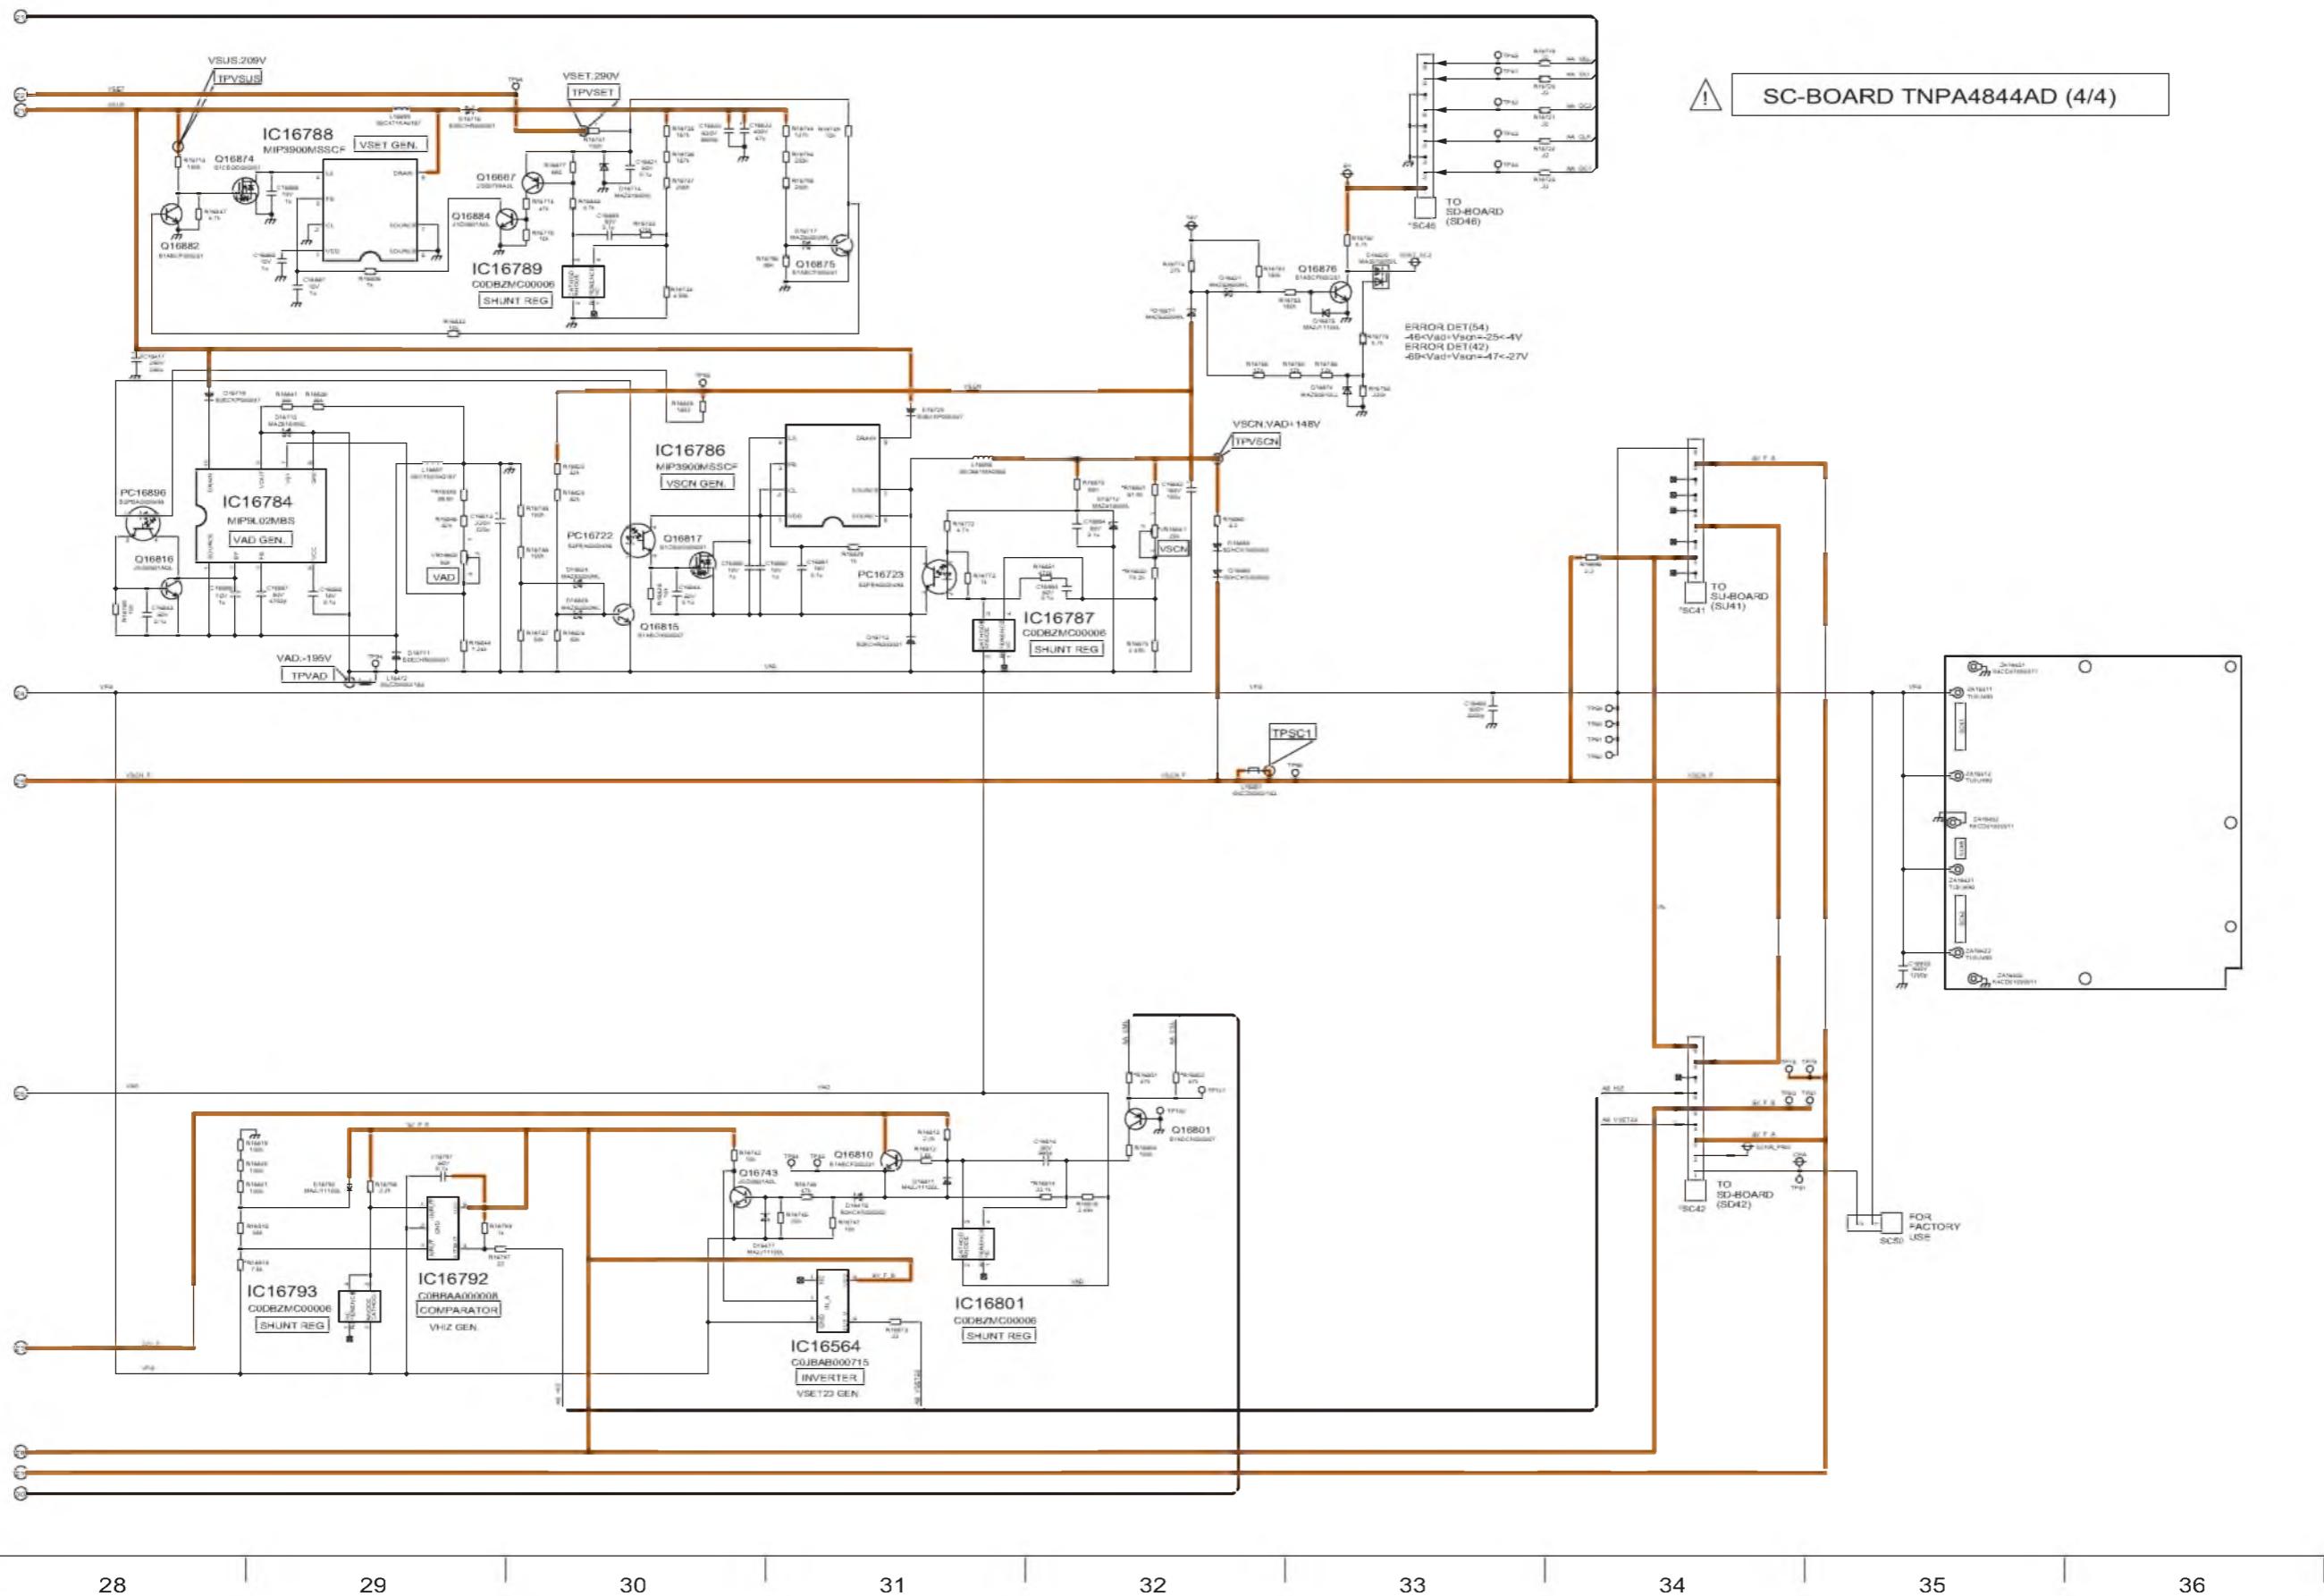

11.33. SS-Board (1/2) Schematic Diagram

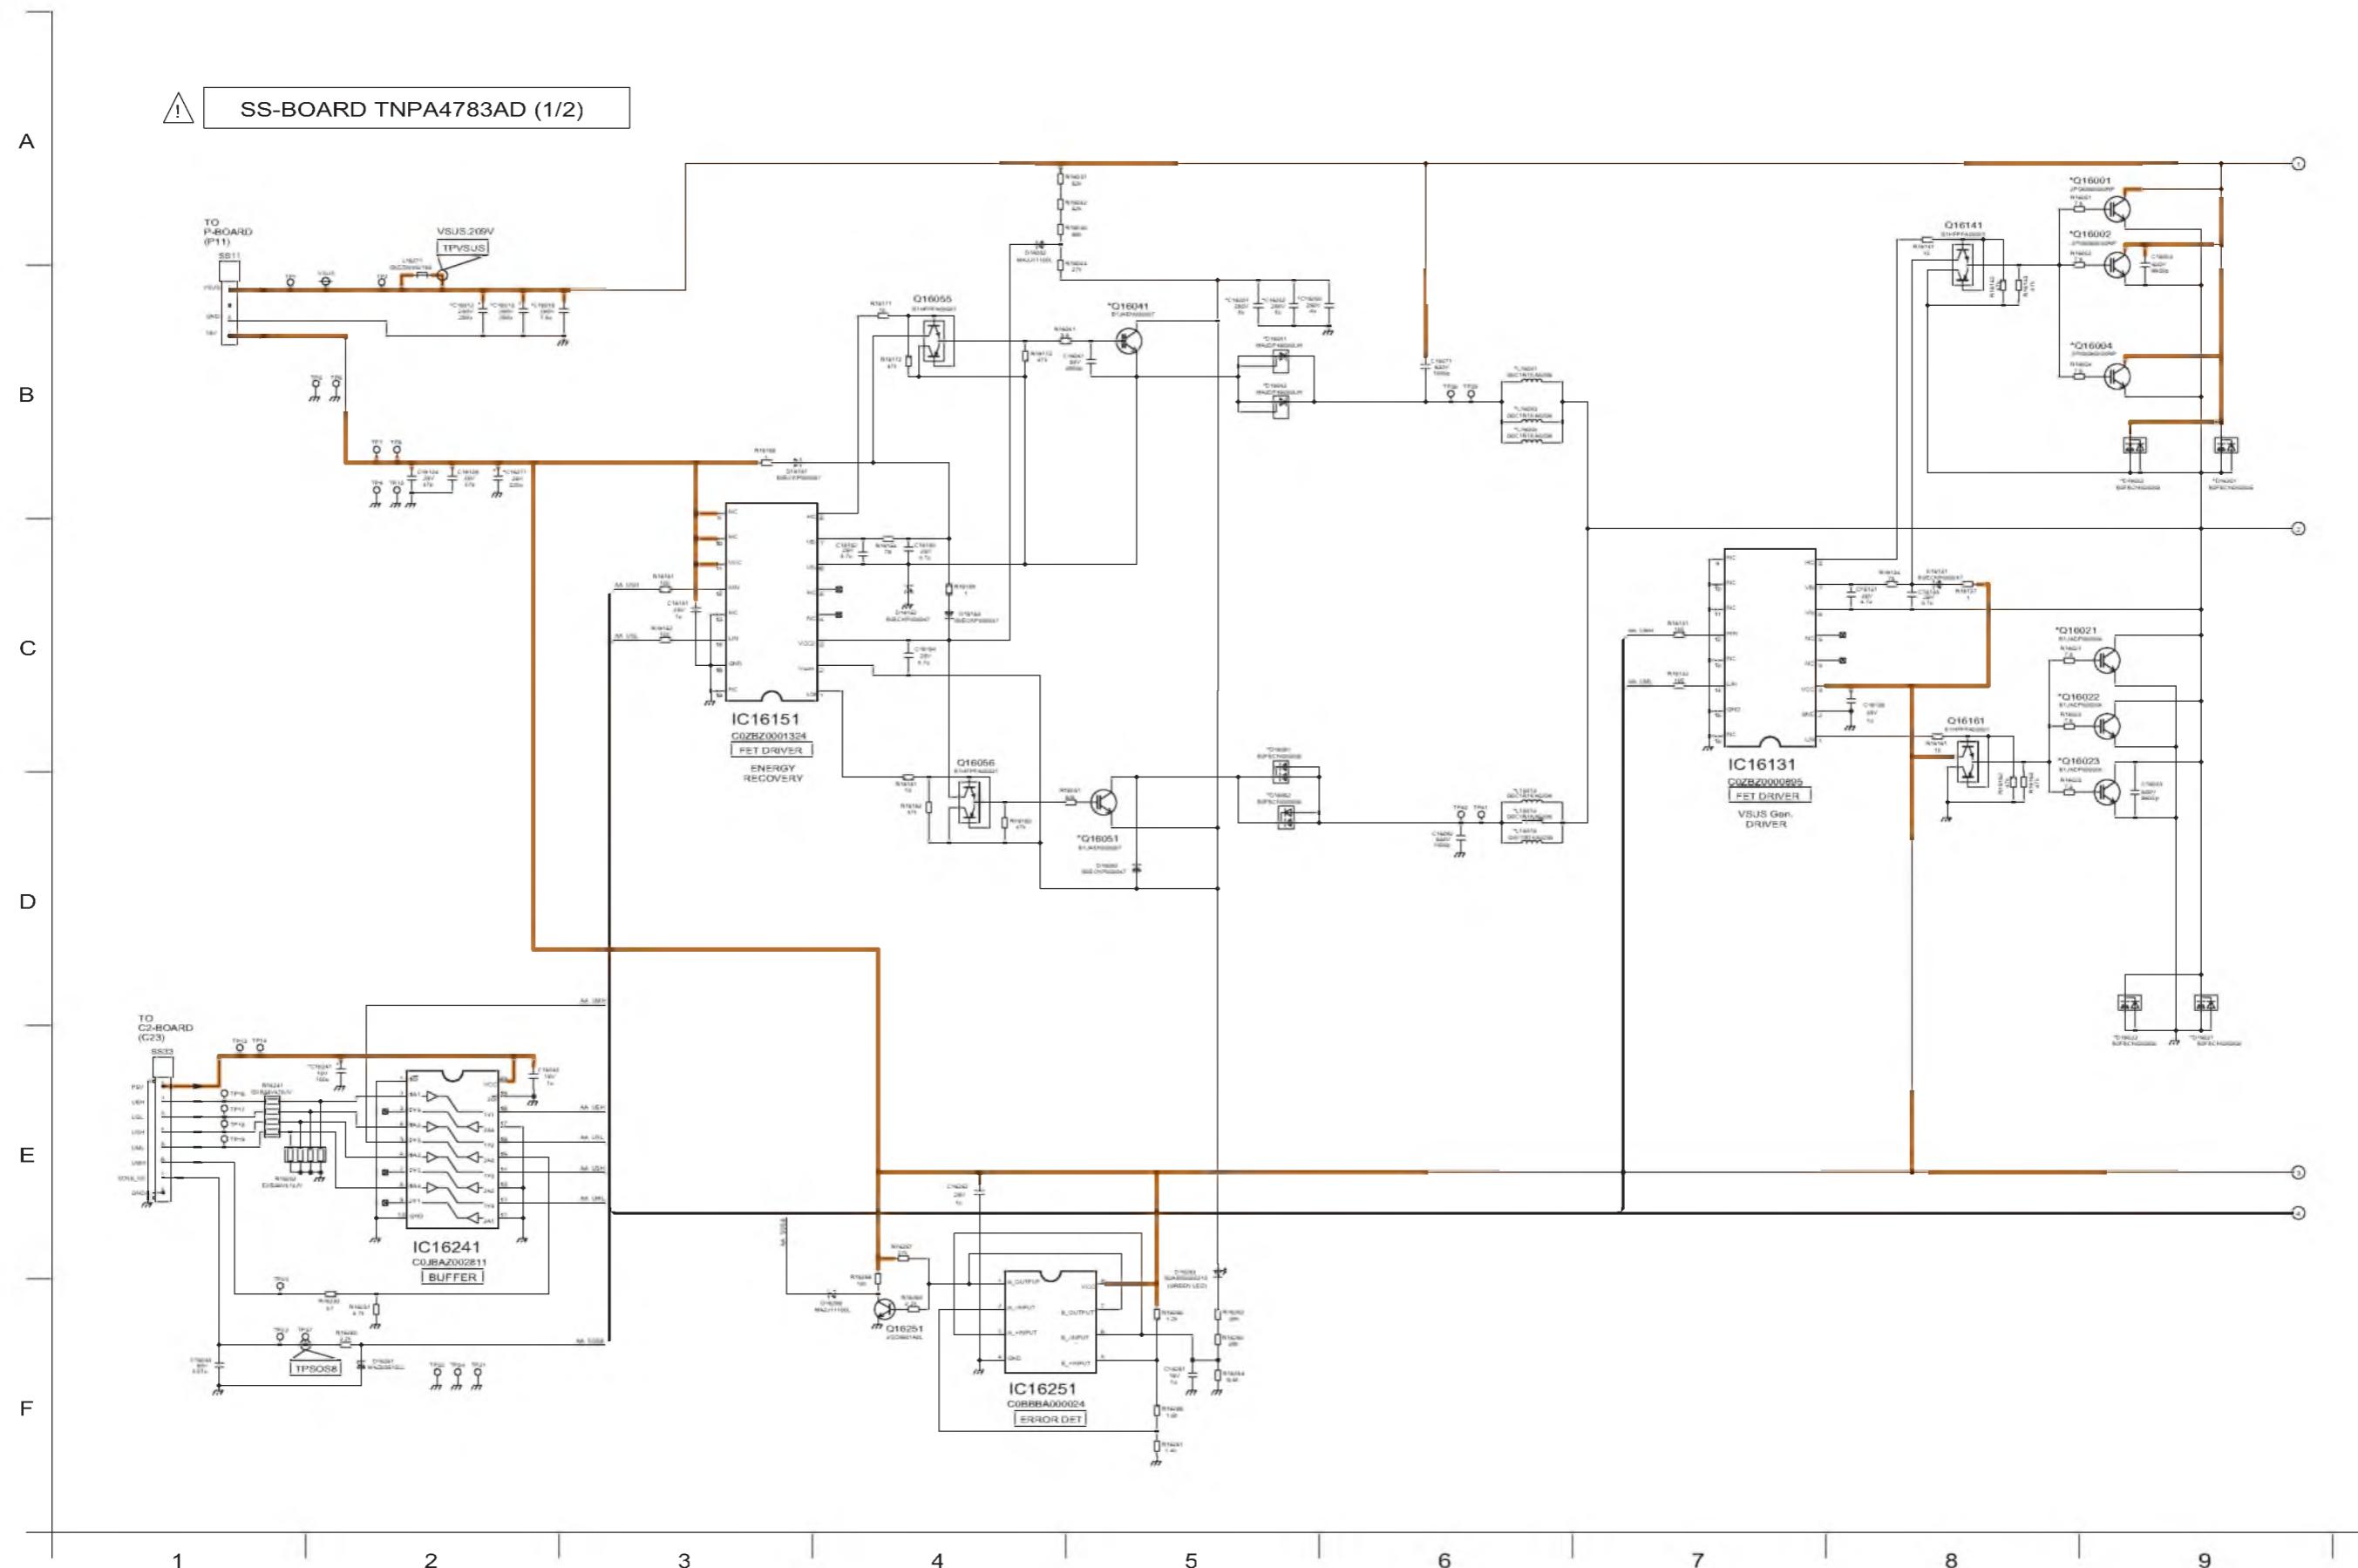

11.34. SS-Board (2/2) and SS2-Board Schematic Diagram

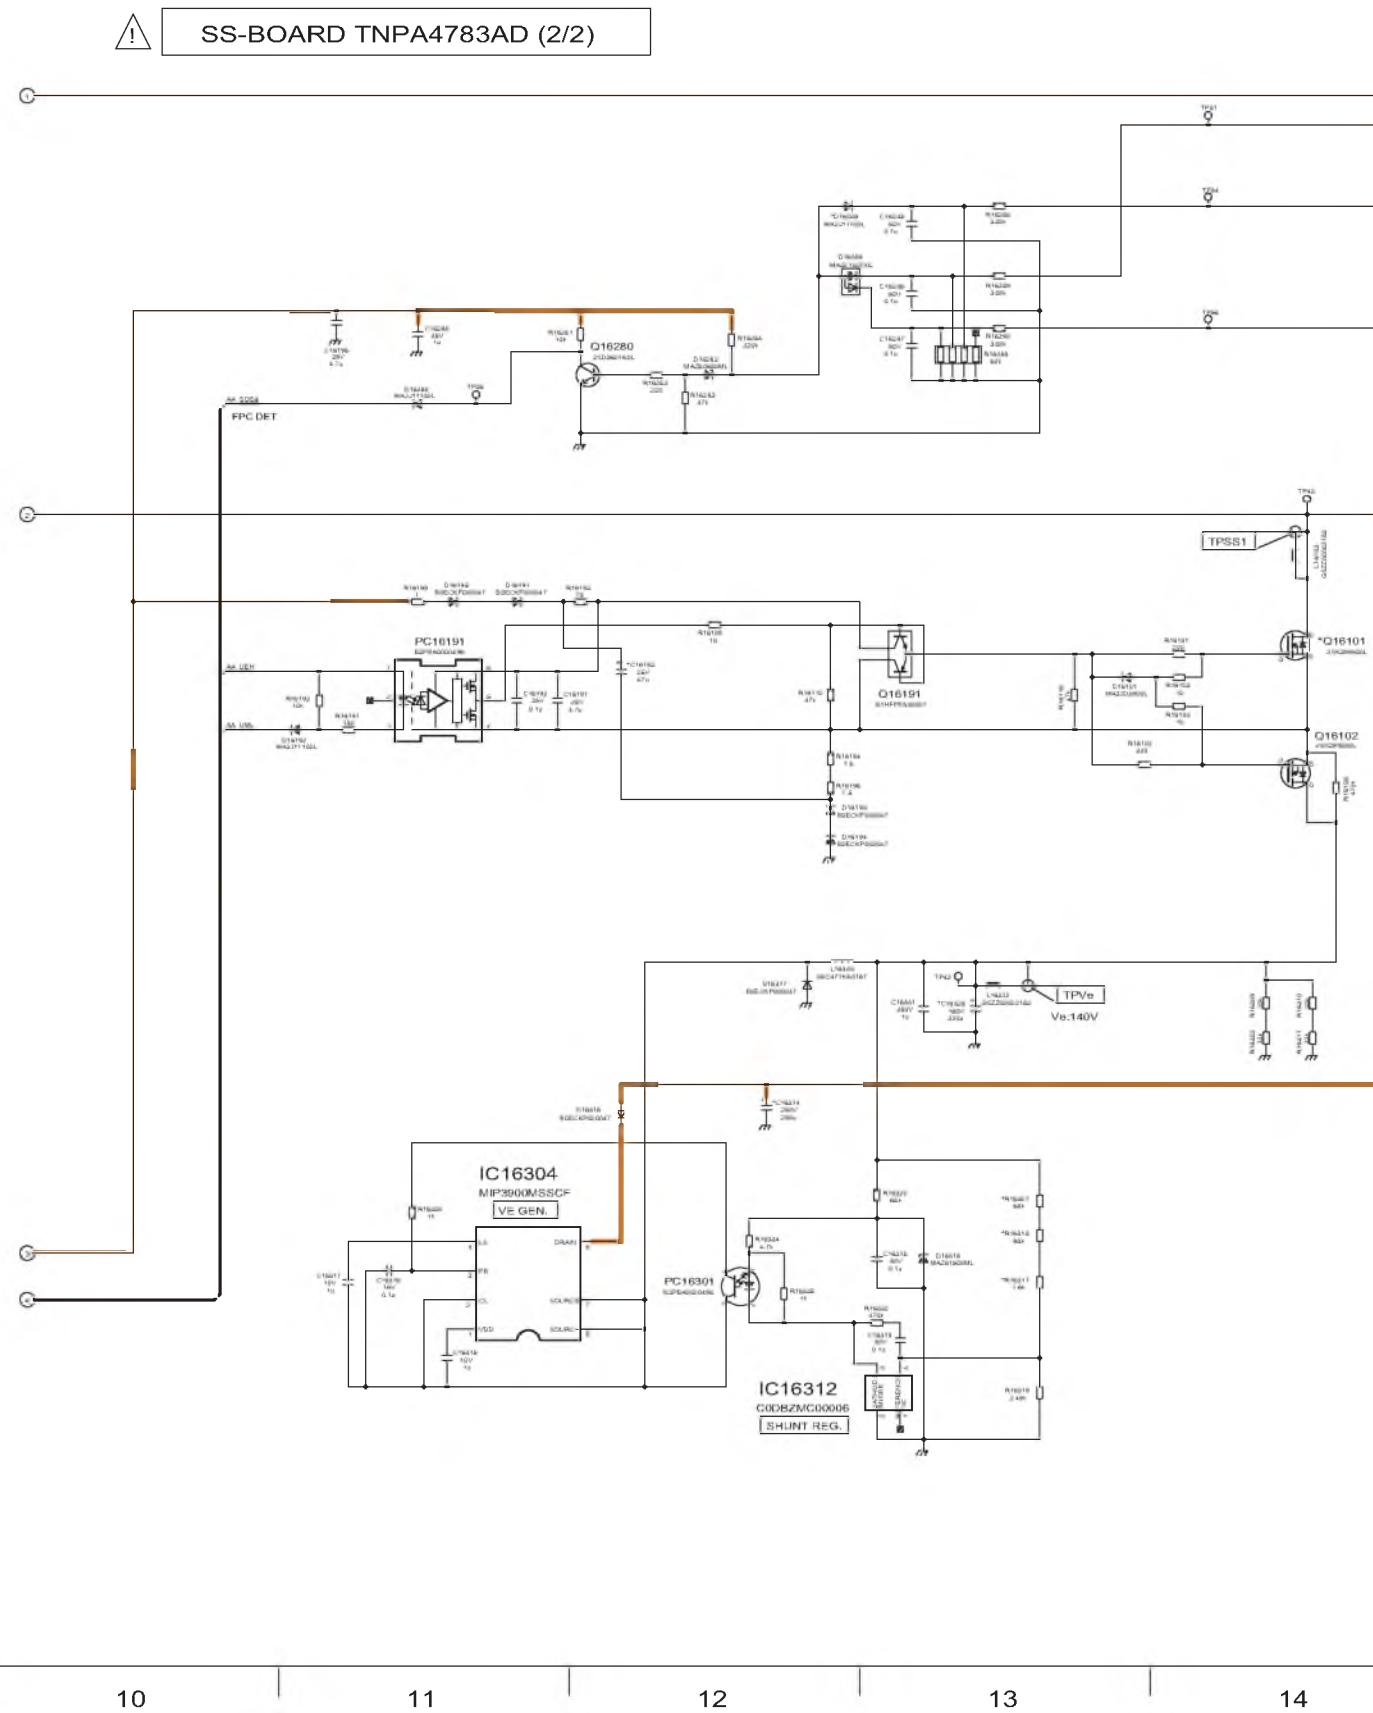


10

11

12

13

14

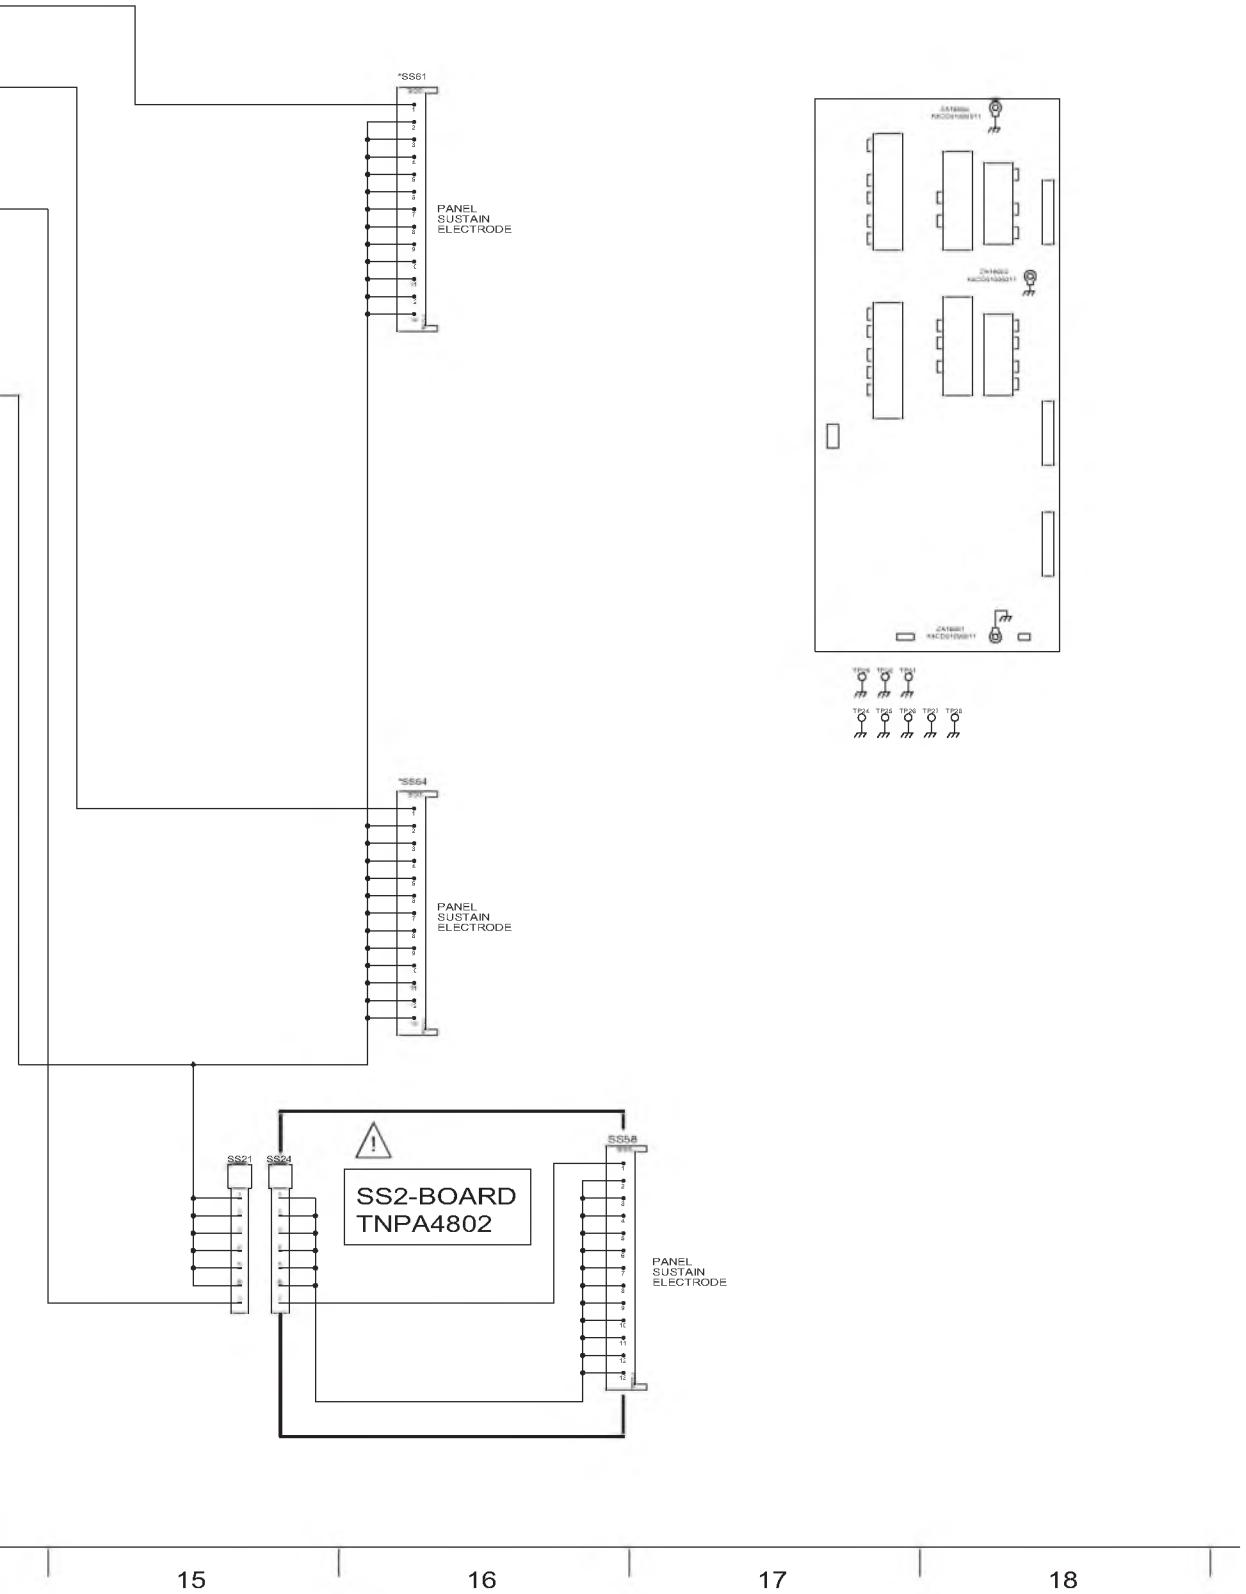

15


16


17

18

12 Printed Circuit Board

12.1. P-Board

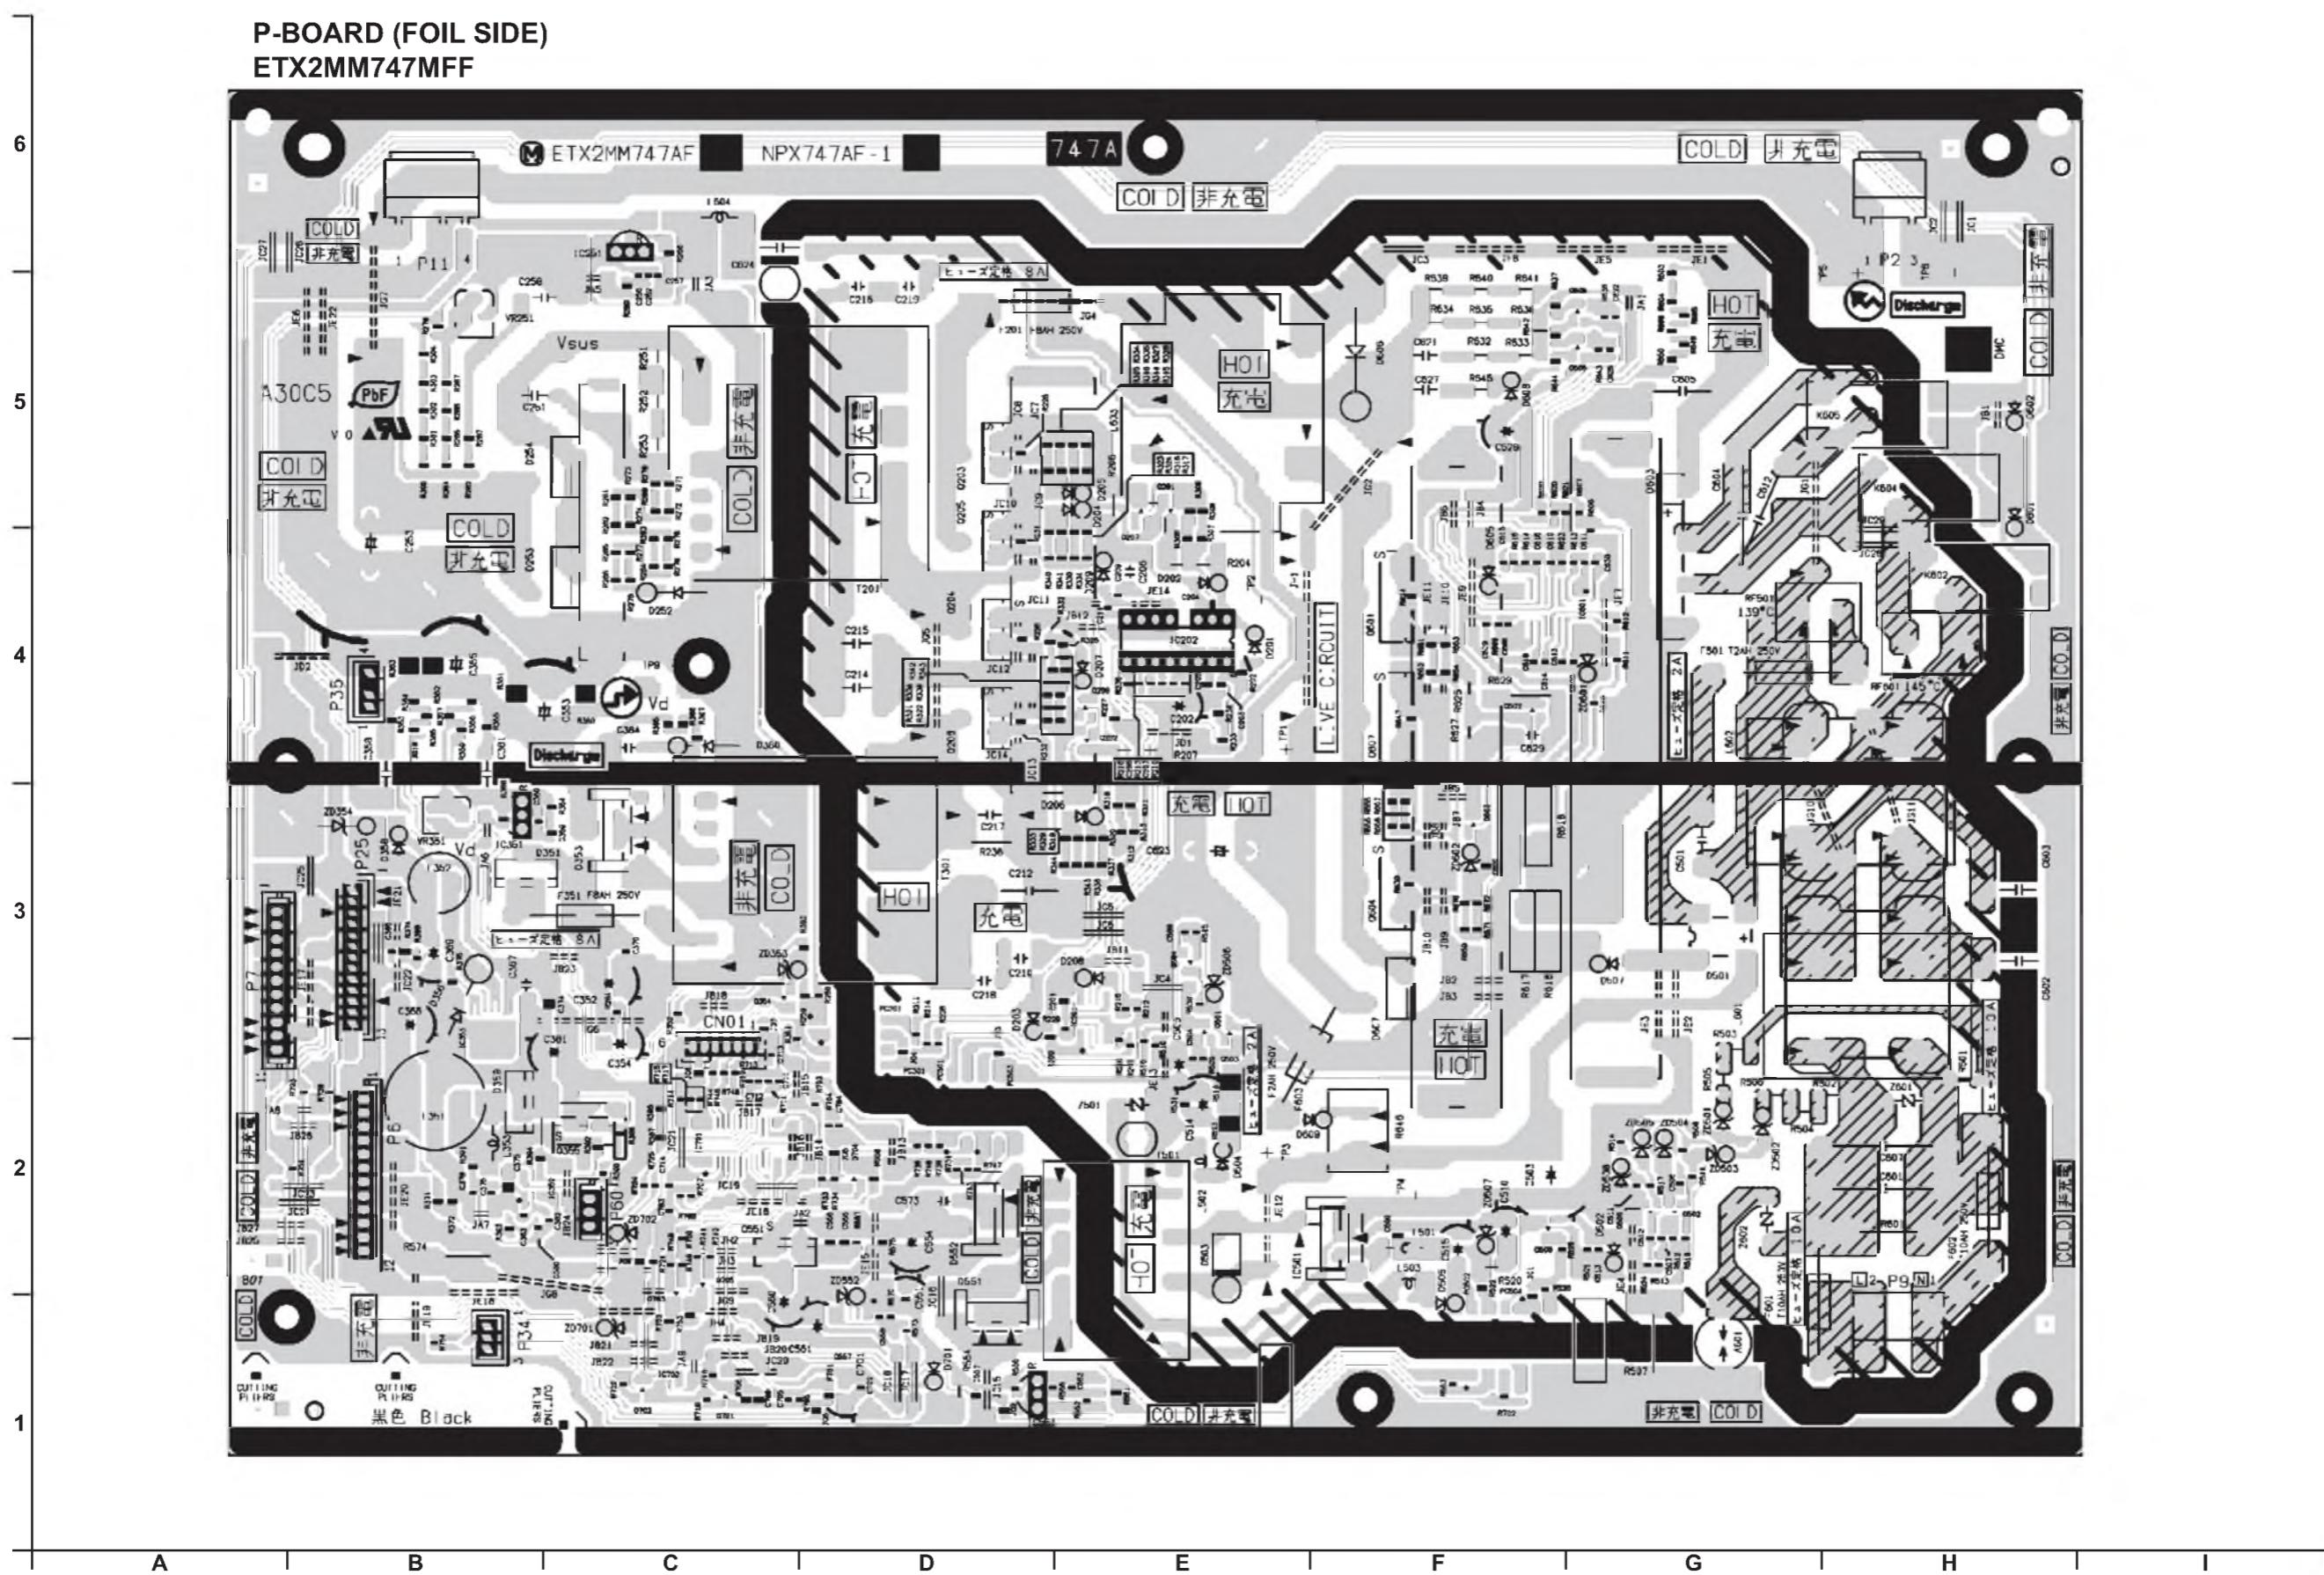

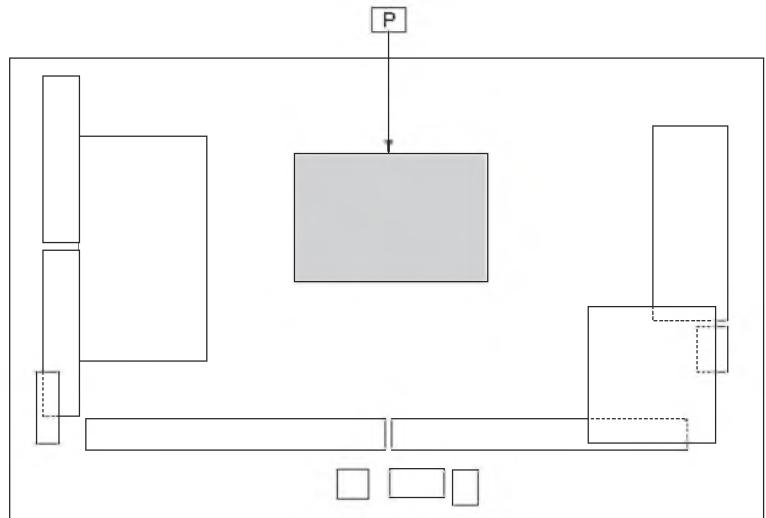


Parts Location

P-BOARD (FOIL SIDE)					
IC		TRANSISTOR		TEST POINT	
IC201	E-3	Q201	E-5	TP1	E-4
IC202	E-4	Q202	E-4	TP2	E-4
IC251	C-6	Q203	D-5	TP3	E-2
IC351	B-3	Q204	D-4	TP4	F-2
IC352	C-2	Q205	D-5	TP5	H-6
IC353	B-3	Q206	D-4	TP6	H-6
IC501	E-2	Q207	E-4	TP9	C-4
IC551	D-1	Q208	E-4		
IC601	G-4	Q354	C-3		
IC701	C-2	Q355	C-2		
IC702	C-1	Q501	F-4	VR251	B-5
		Q502	G-2	VR351	B-3
VOLUME					
		Q503	E-2		
		Q504	F-3		
		Q505	G-2		
		Q506	F-2		
		Q551	C-2		
		Q557	D-1		
		Q602	F-4		
		Q603	F-3		
		Q605	G-5		
		Q606	G-5		
		Q701	C-1		
		Q702	C-1		
		Q703	C-1		
		Q704	D-2		
		Q705	C-2		

Parts Location

P-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR		TEST POINT	
IC202	E-4	Q203	F-5	TP1	D-4
IC251	G-6	Q204	F-4	TP2	E-4
IC351	G-3	Q205	F-5	TP3	D-2
IC501	D-2	Q206	F-4	TP4	D-2
IC551	E-1	Q355	G-2	TP5	B-5
		Q551	F-2	TP6	B-6
		Q501	D-4	TP9	G-4
		Q504	D-3	VOLUME	
				VR251	G-5
				VR351	H-3

**P-BOARD (COMPONENT SIDE)
ETX2MM747MFF**

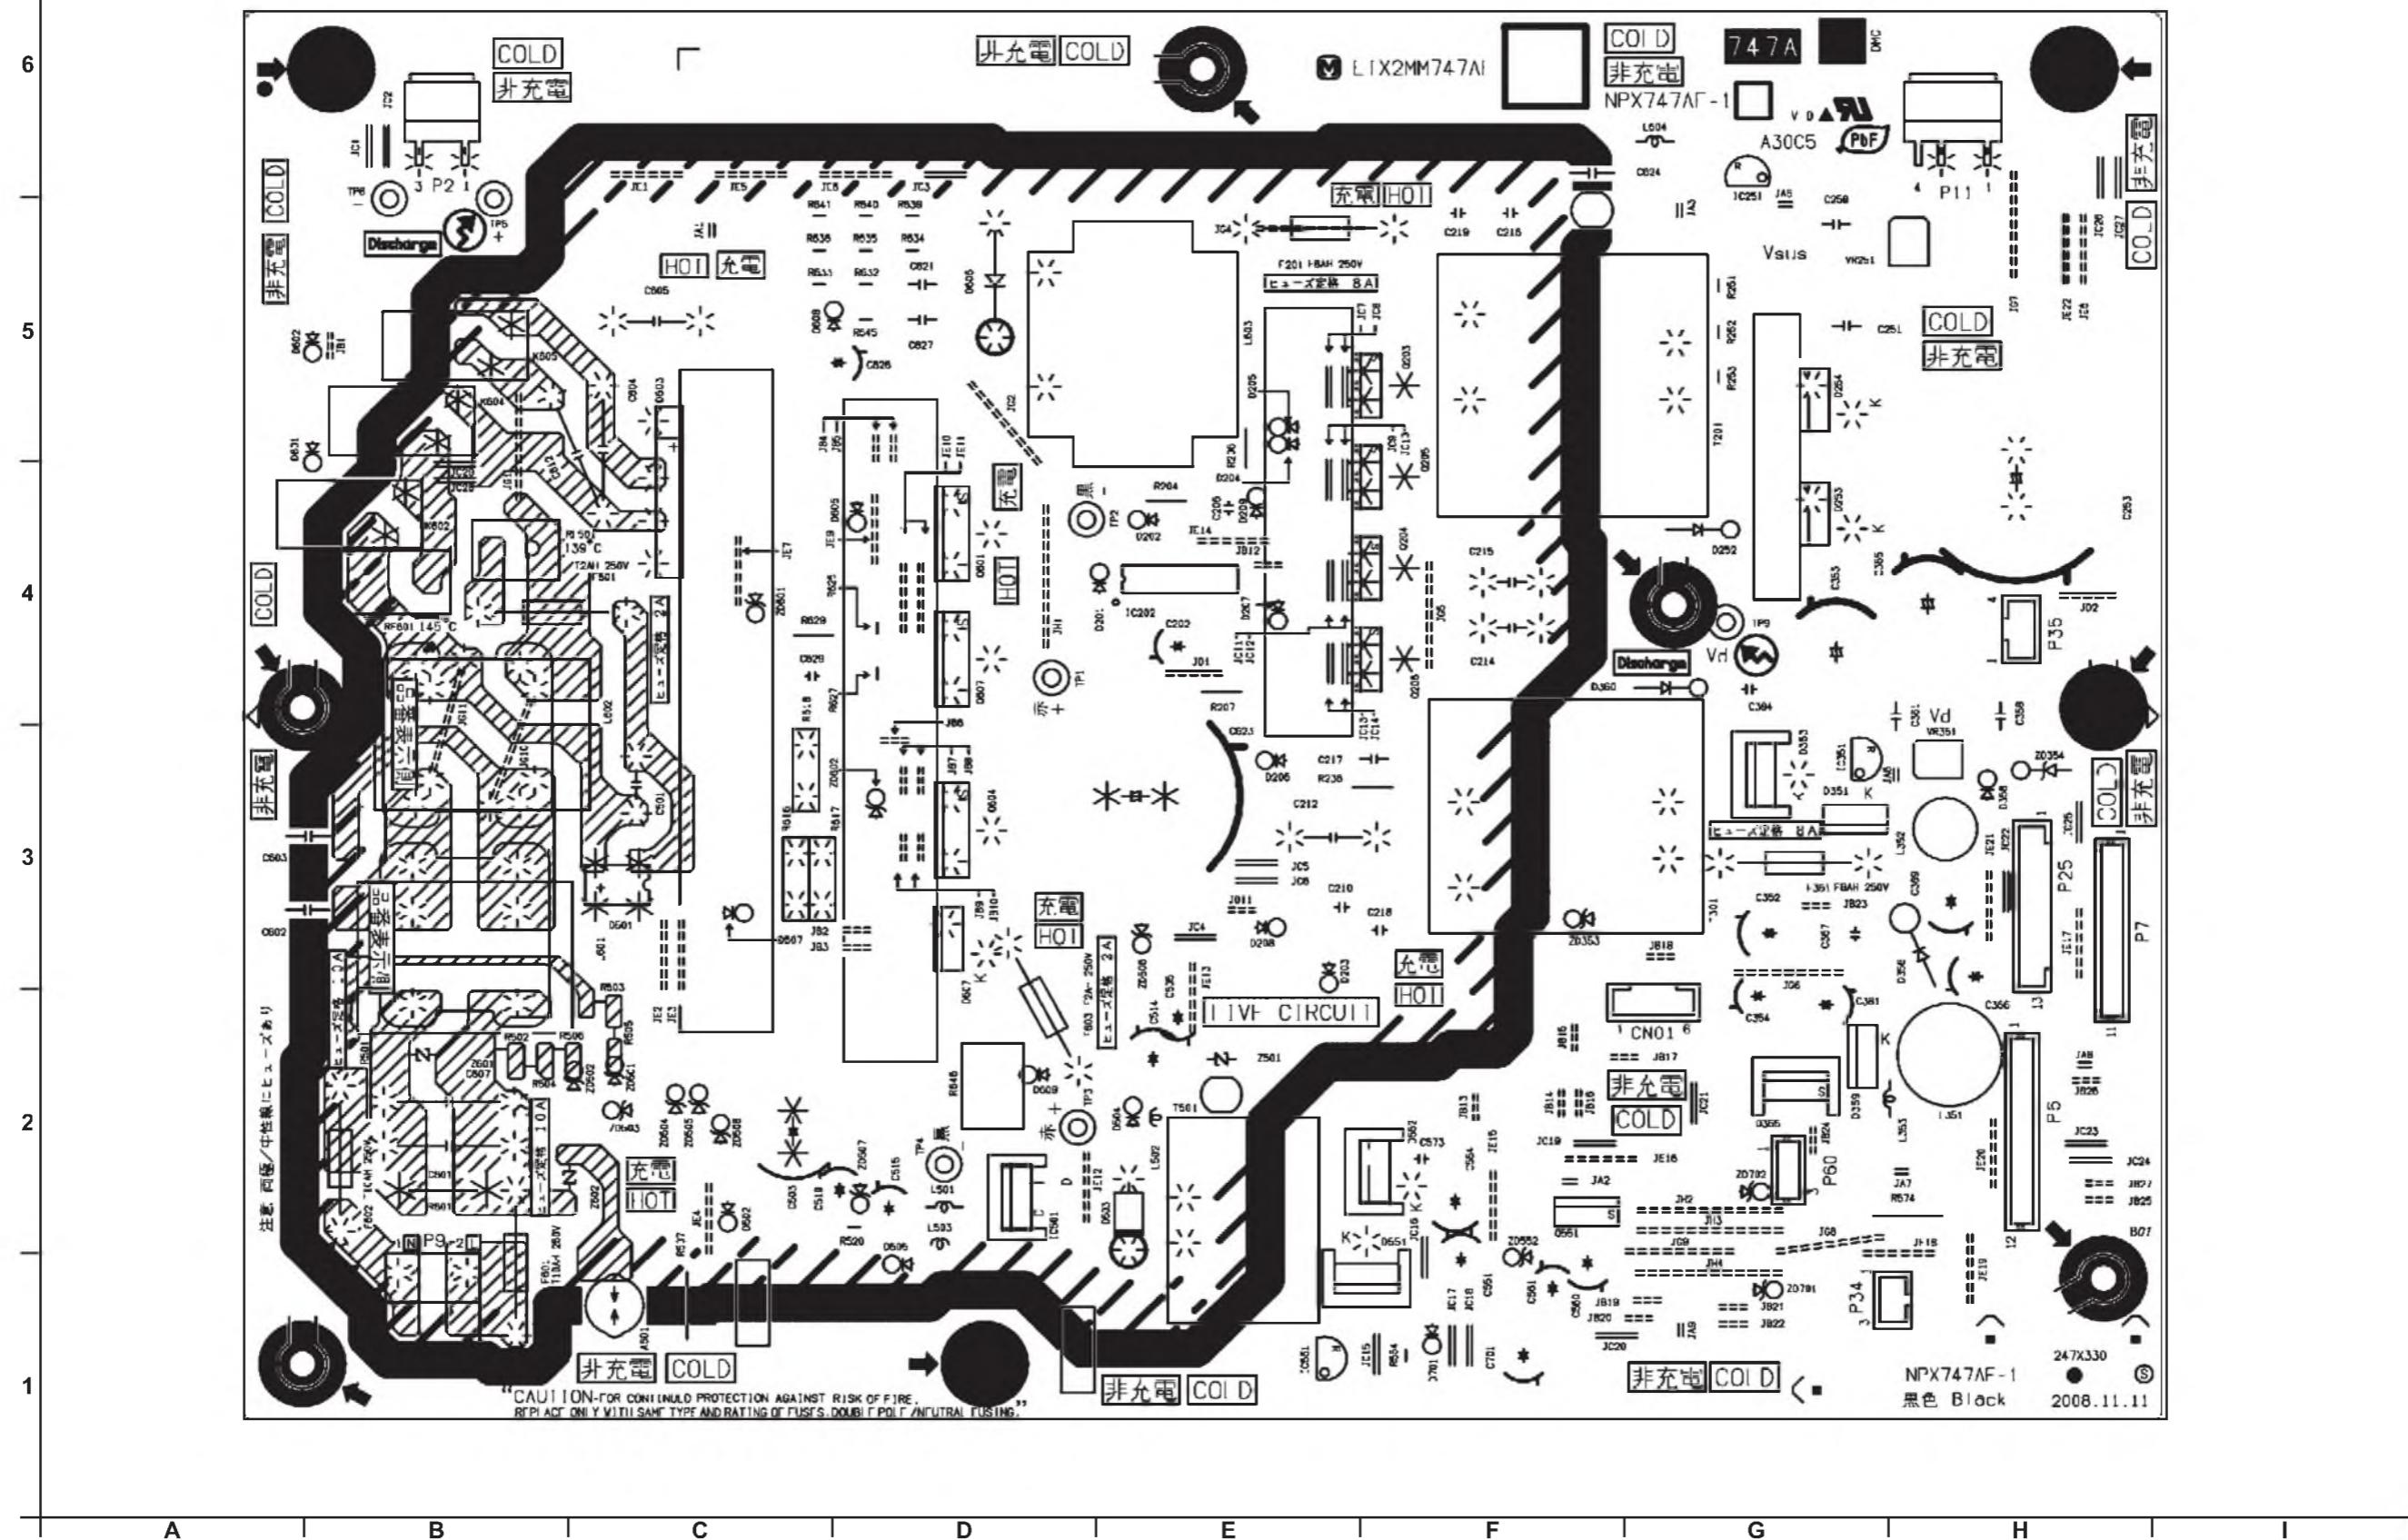


12.2. GK, K, S and SS2-Board


SS2-BOARD (FOIL SIDE)
TNPA4802




S-BOARD (FOIL SIDE)
TXN/S1EQUE

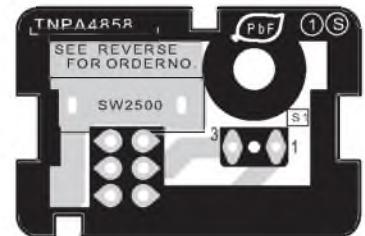


SS2-BOARD (COMPONENT SIDE)
TNPA4802

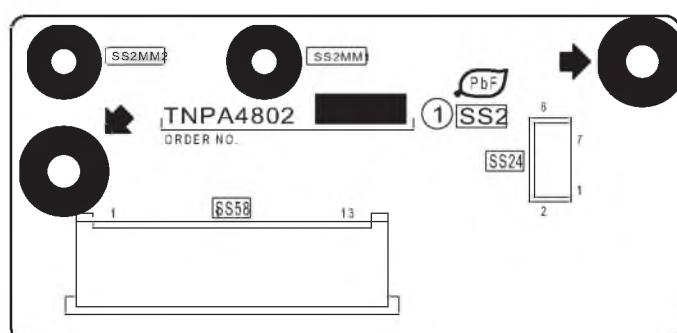


S-BOARD (COMPONENT SIDE)
TXN/S1EQUE

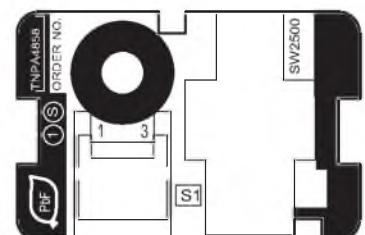


GK-BOARD (FOIL SIDE)
TXNGK1EQUE

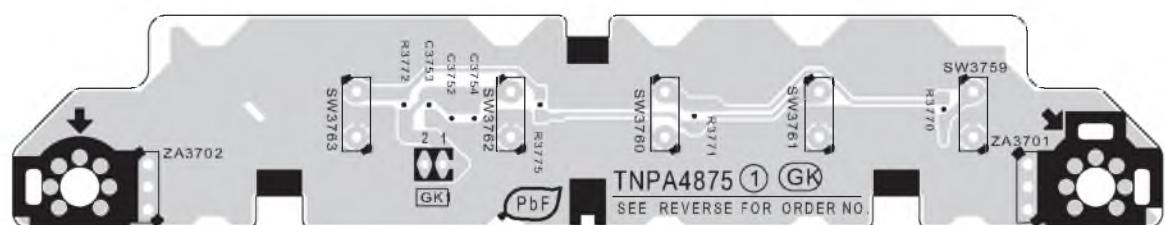


GK-BOARD (COMPONENT SIDE)
TXNGK1EQUE

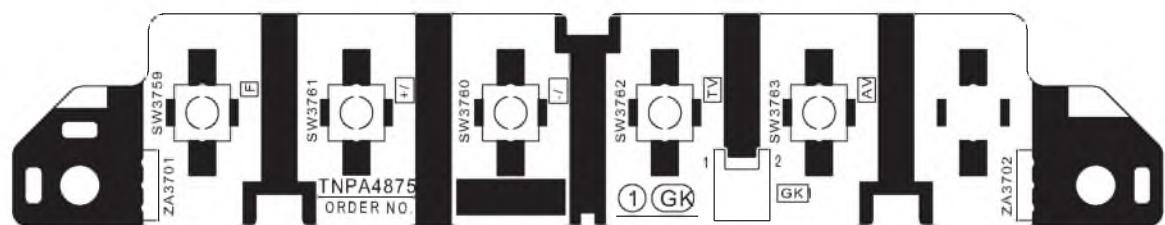


A | B | C | D | E

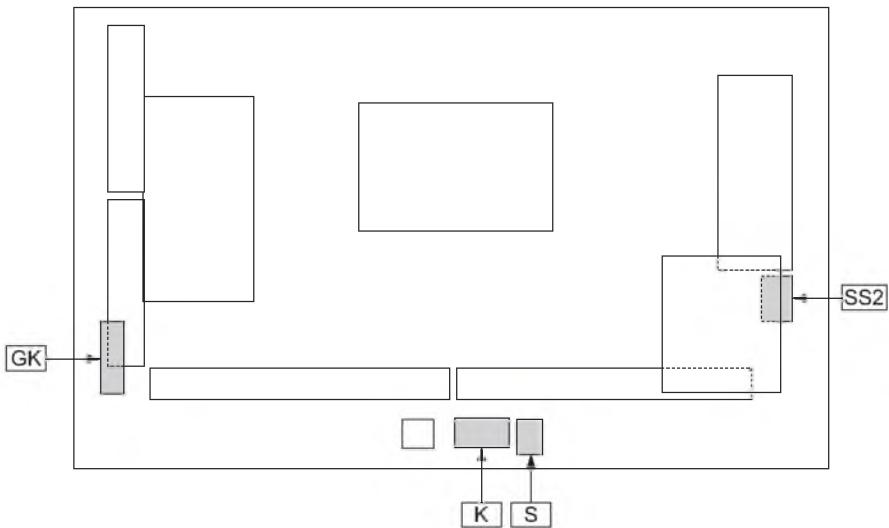

K-BOARD (FOIL SIDE)
TXN/K1EQR

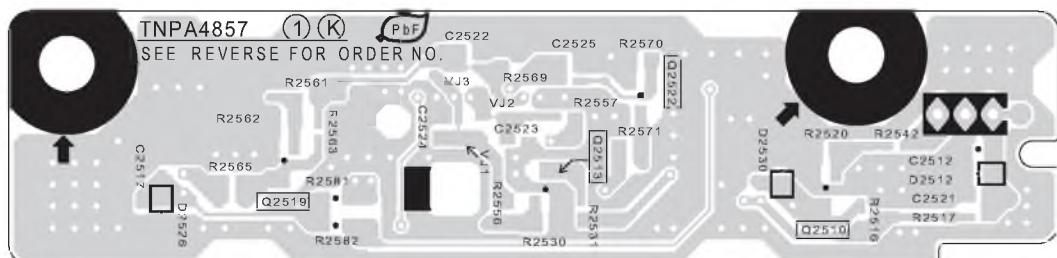



K-BOARD (COMPONENT SIDE)
TXN/K1EQR

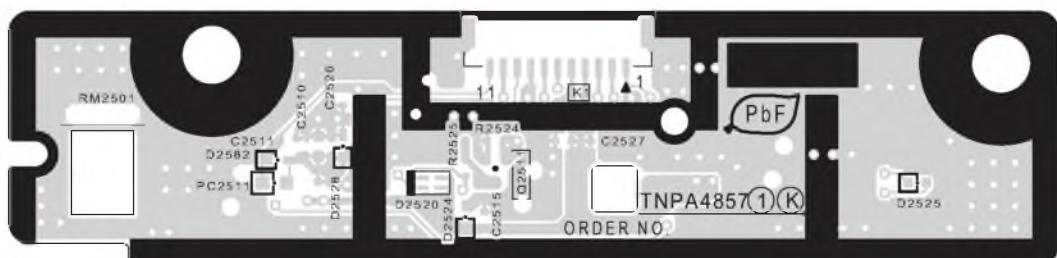

I F G H I

12.3. GL-Board


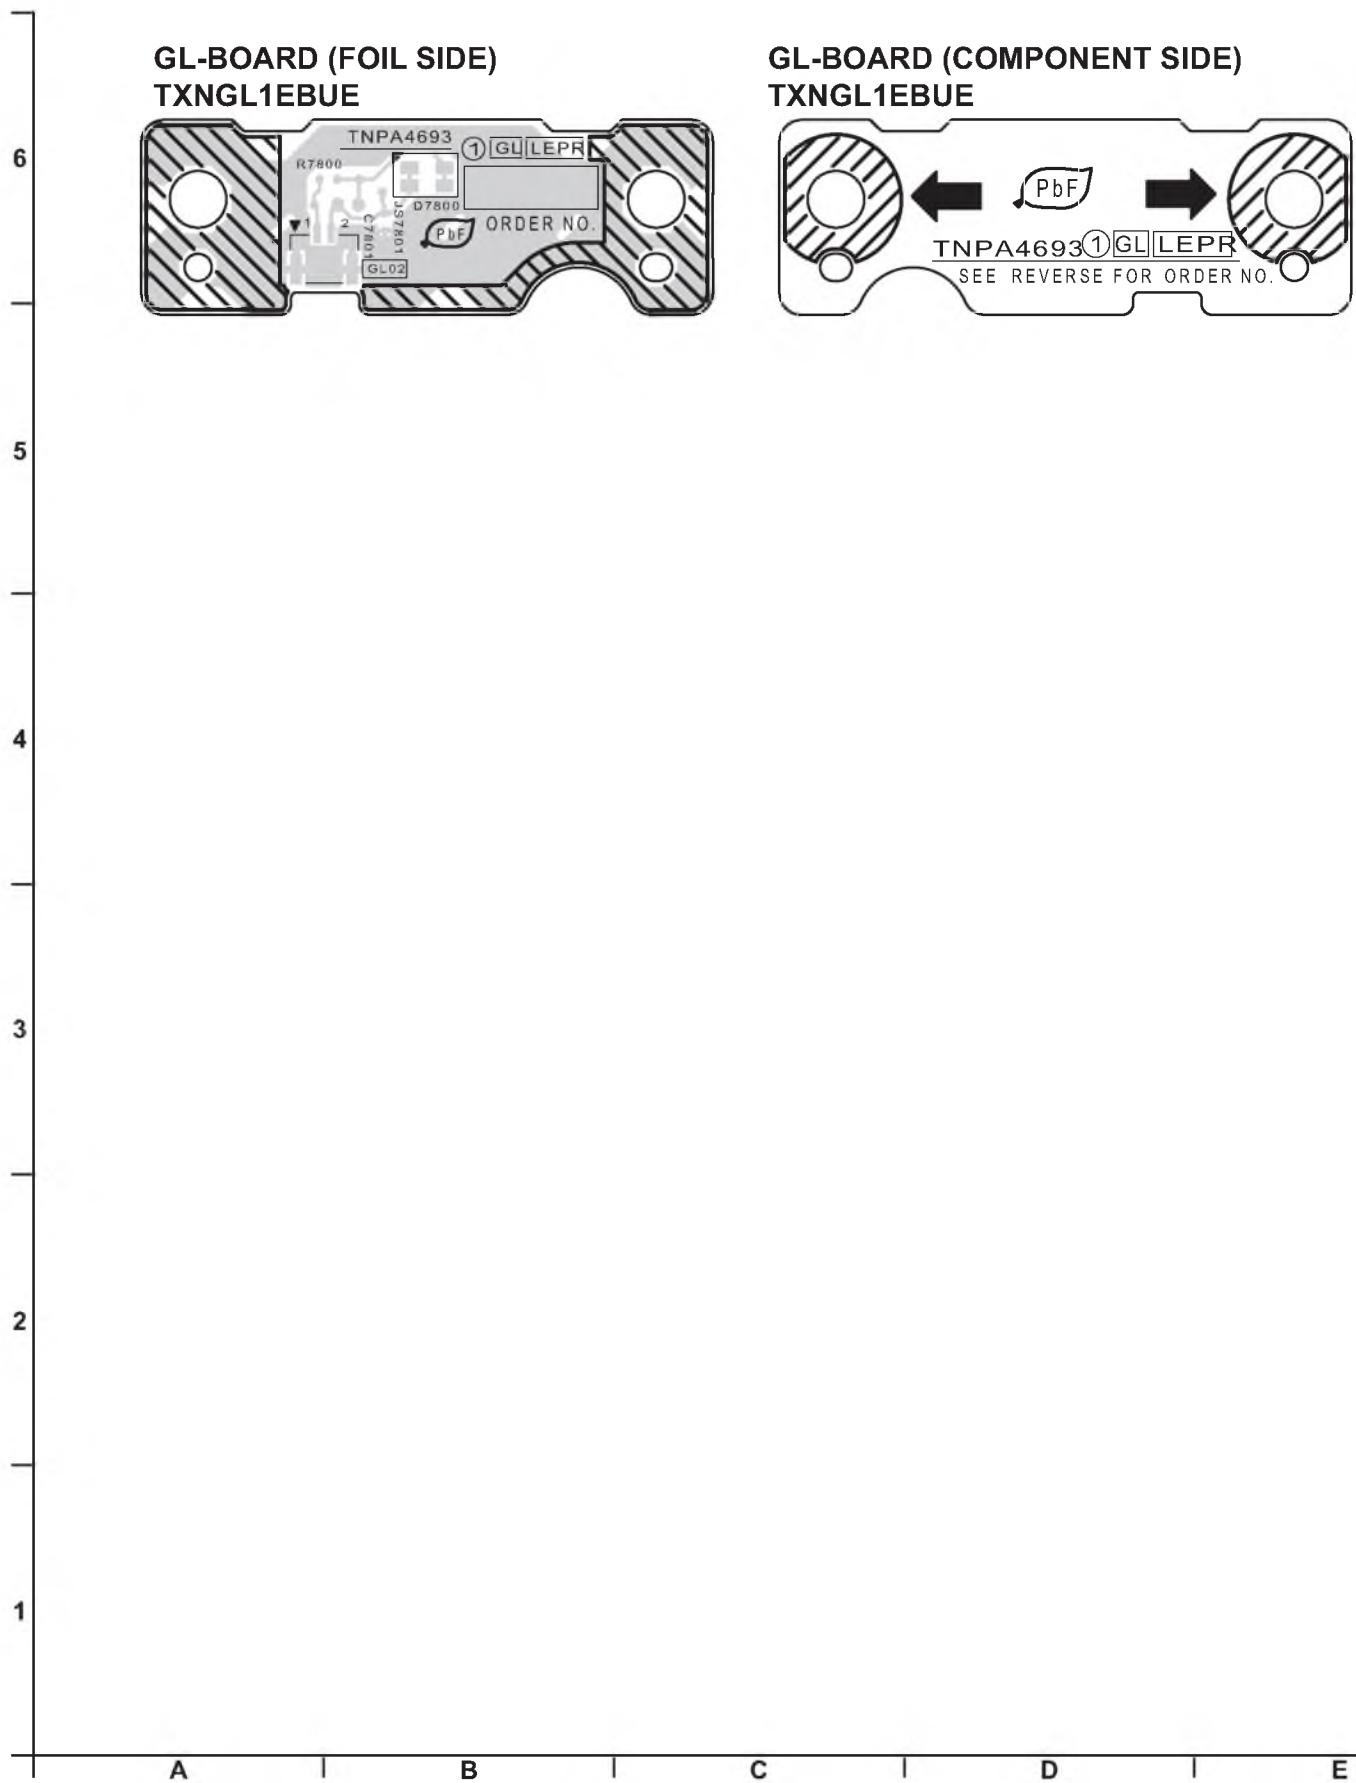


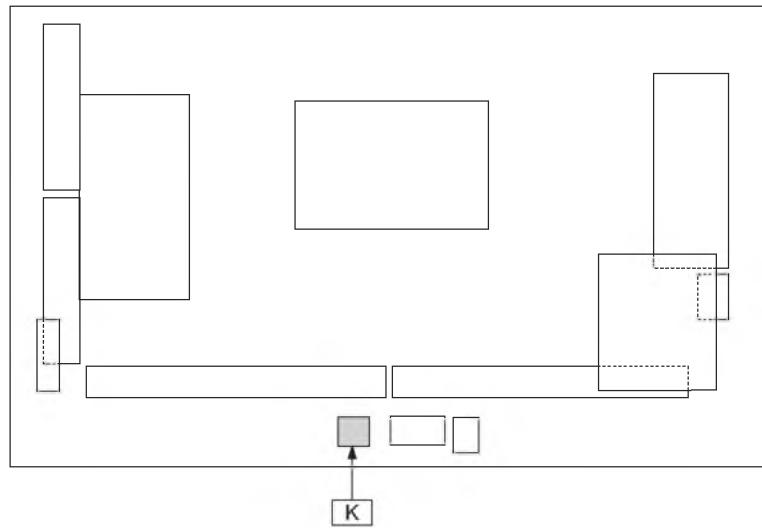

I F I G I H I I

12.4. A-Board

A-BOARD (FOIL SIDE) A-PR42G10

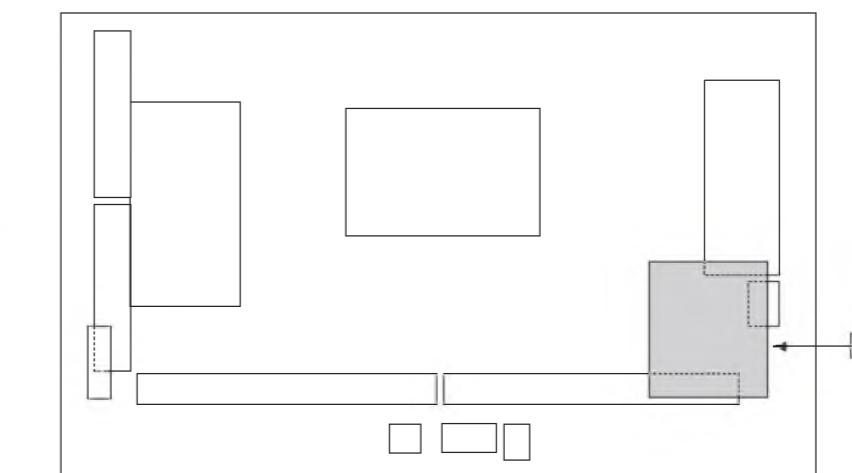
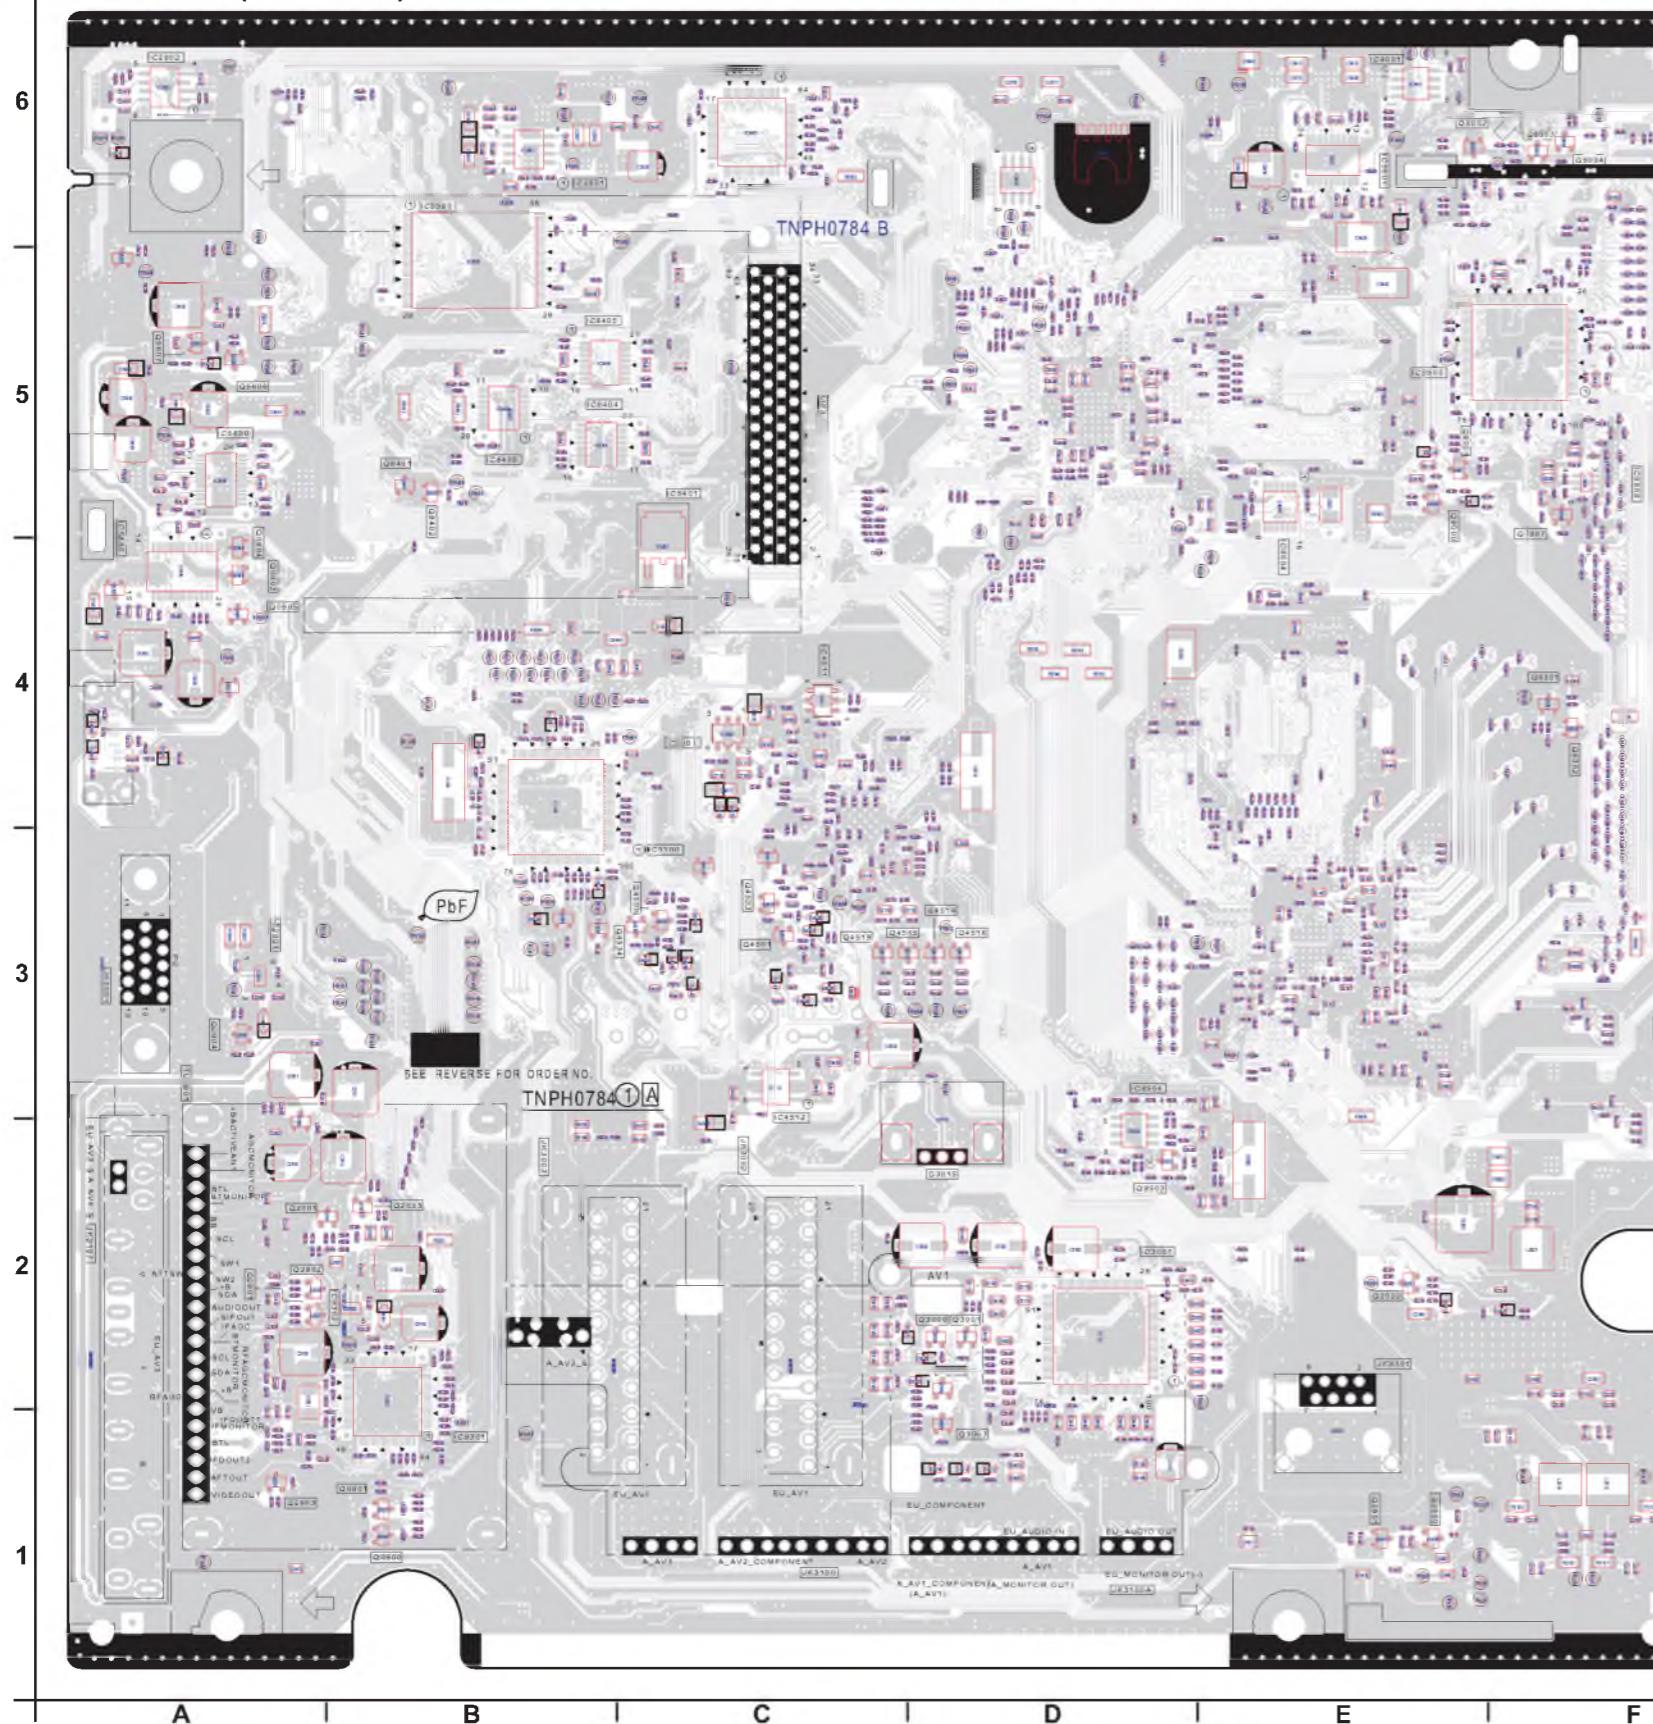


Parts Location

A-BOARD (FOIL SIDE)			
IC	TRANSISTOR		
IC1100	C-3	Q0900	B-1
IC2008	C-4	Q0901	B-1
IC2801	B-6	Q0903	A-4
IC2802	A-6	Q0904	A-4
IC2901	A-3	Q0905	A-4
IC3001	D-2	Q2001	A-2
IC4511	C-4	Q2022	E-2
IC4512	C-3	Q2023	B-2
IC5401	C-5	Q2850	E-1
IC5480	A-4	Q2851	E-1
IC5600	A-5	Q2901	A-2
IC5601	E-6	Q2902	A-2
IC8004	E-4	Q2903	A-1
IC8301	B-1	Q2904	A-3
IC8302	B-2	Q3000	D-2
IC8401	C-6	Q3001	D-2
IC8404	B-5	Q3002	D-2
IC8405	B-5	Q3003	D-1
IC8408	B-5	Q4500	C-3
IC8502	D-6	Q4501	C-3
IC8504	D-3	Q4514	D-3
IC8580	B-6	Q4515	C-3
IC9001	E-6	Q4516	D-3
IC9500	E-5	Q4519	C-3
IC9808	F-5	Q4533	C-3
		Q4534	C-3
		Q5606	A-5
		Q5607	A-5
		Q8401	B-5
		Q8402	B-5
		Q8503	D-2
		Q9000	E-5
		Q9001	E-5
		Q9002	E-6
		Q9003	F-6
		Q9004	F-6
		Q9301	F-4
		Q9302	F-4
		Q9807	F-5

A-BOARD (COMPONENT SIDE) A-PR42G10



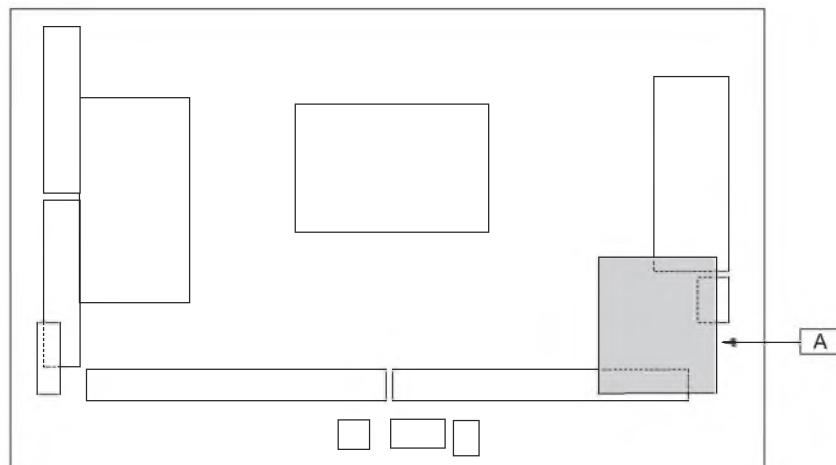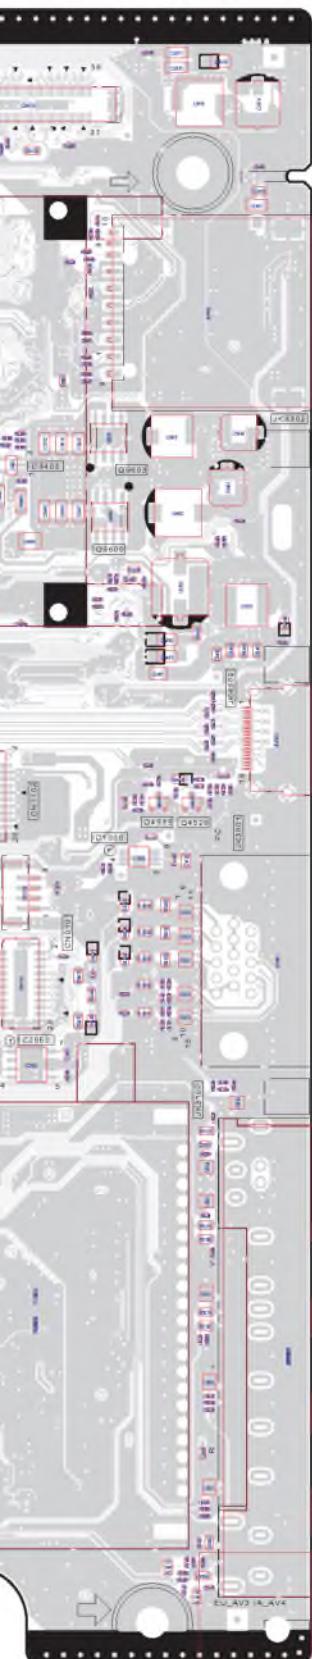


Parts Location


A-BOARD (COMPONENT SIDE)			
IC		TRANSISTOR	
IC1000	E-3	Q2063	D-1
IC1101	E-4	Q2064	C-1
IC2301	B-2	Q2065	C-1
IC2960	E-3	Q2066	C-1
IC3003	B-1	Q2067	C-1
IC4510	D-3	Q3004	D-1
IC4513	D-3	Q3005	D-1
IC5470	D-4	Q4517	C-2
IC8001	C-5	Q4520	F-4
IC8002	B-5	Q4535	F-4
IC8003	B-5	Q5480	D-1
IC8303	D-5	Q5565	D-4
IC8304	E-5	Q5600	F-5
IC8305	E-5	Q5601	B-6
IC8403	E-5	Q5602	B-6
IC8409	D-5	Q5603	F-5
IC8410	E-5	Q5608	D-4
IC8411	E-5	Q8200	D-5
IC8503	C-2	Q8504	B-3
IC9003	A-6		
IC9004	A-5		
IC9300	B-3		
IC9303	B-2		
IC9802	A-5		
IC9803	A-5		
IC9805	A-3		
IC9806	A-3		
IC9807	B-4		
IC9809	A-6		
IC9902	B-4		
IC9903	B-4		

I F G H I


12.5. C1-Board

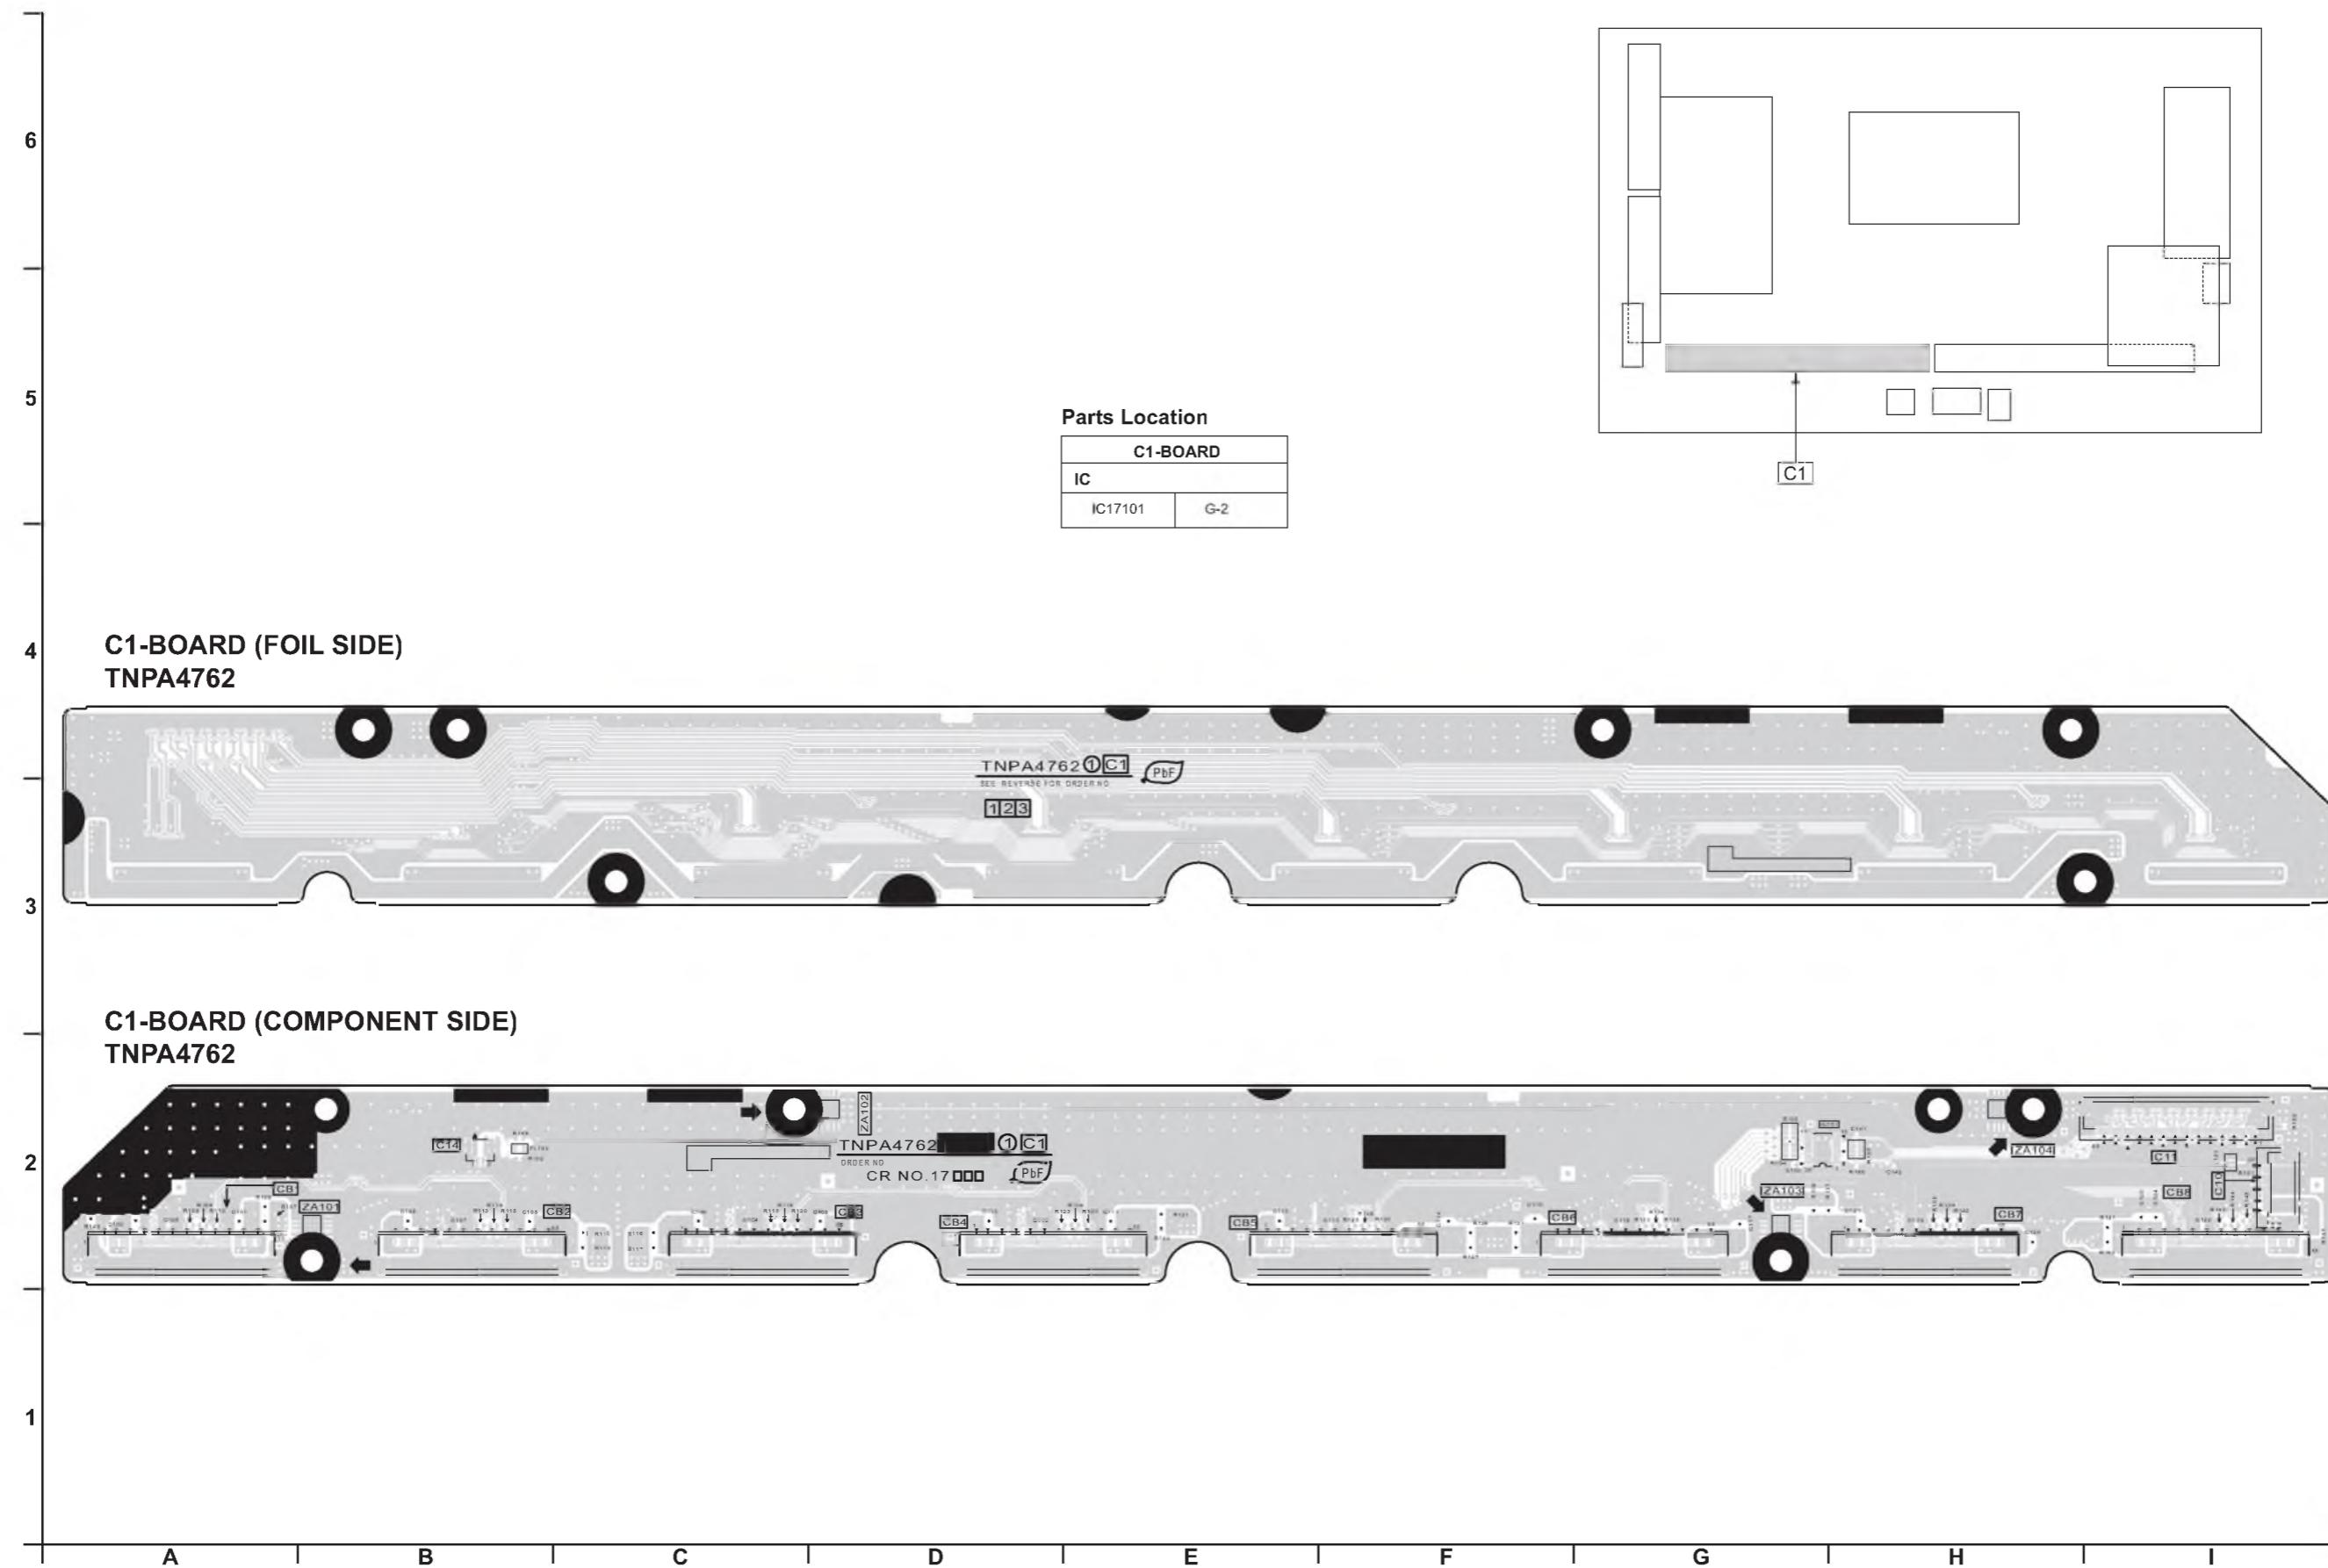



12.6. C2-Board

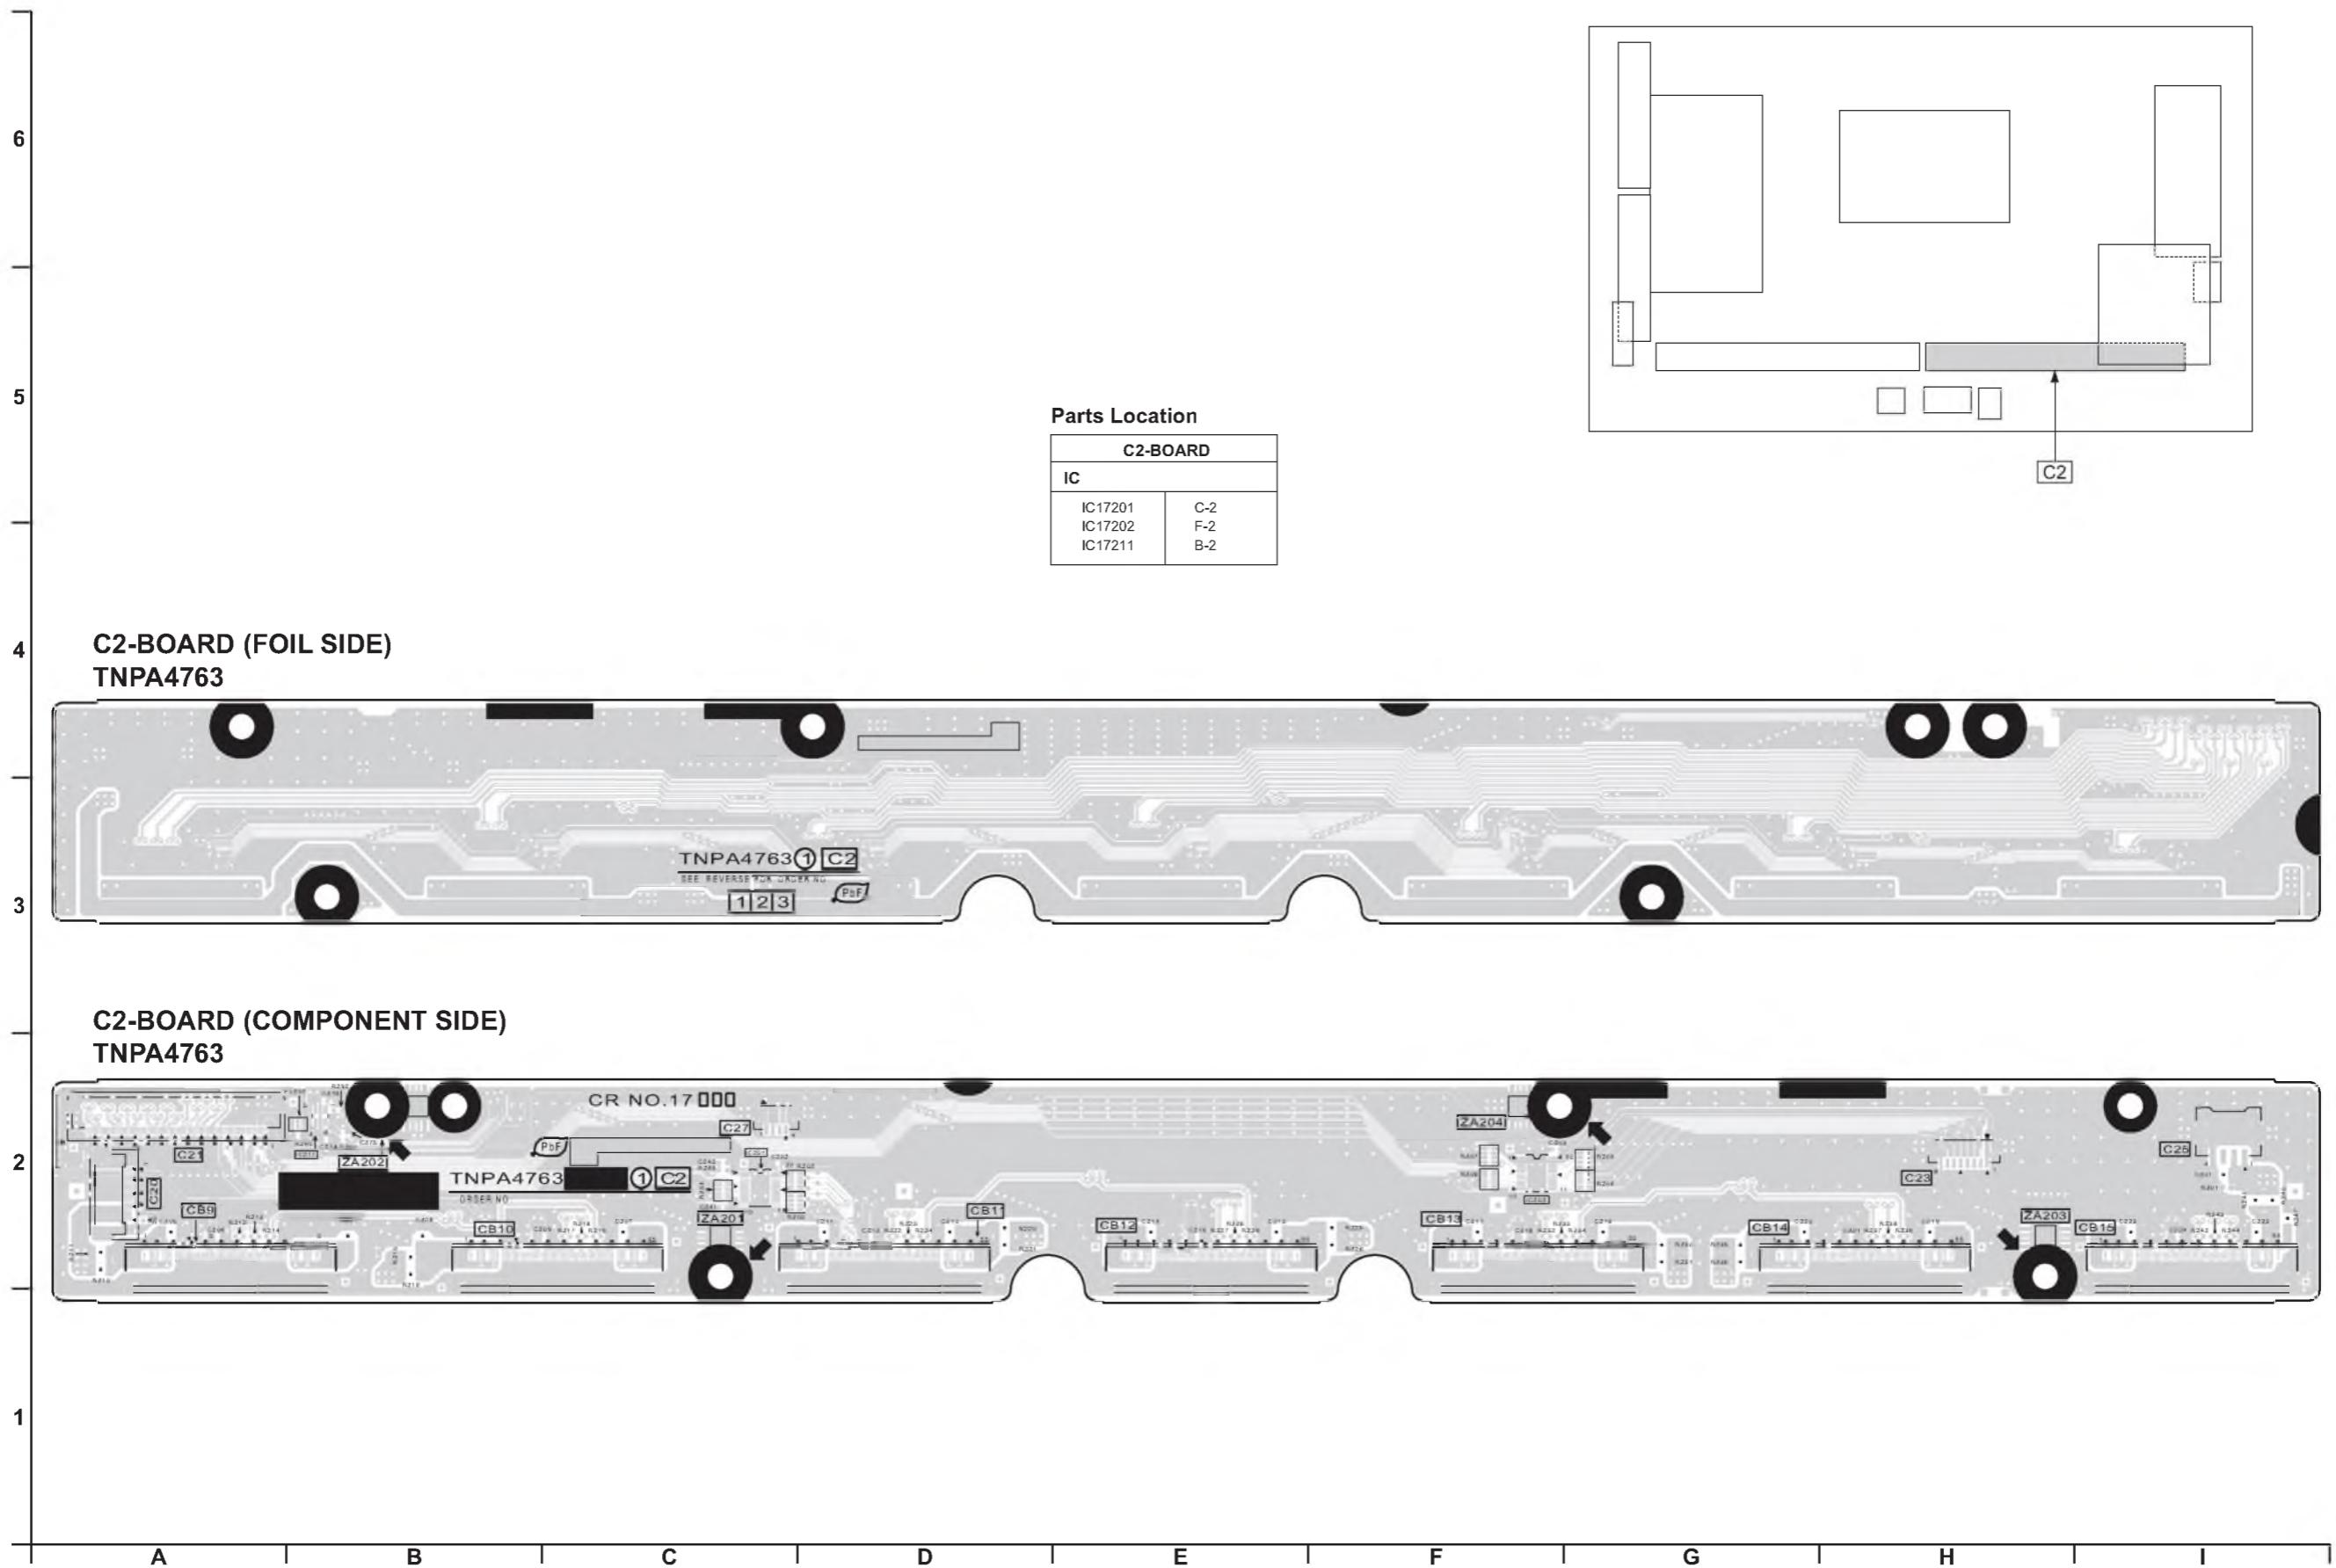

12.7. SC-Board

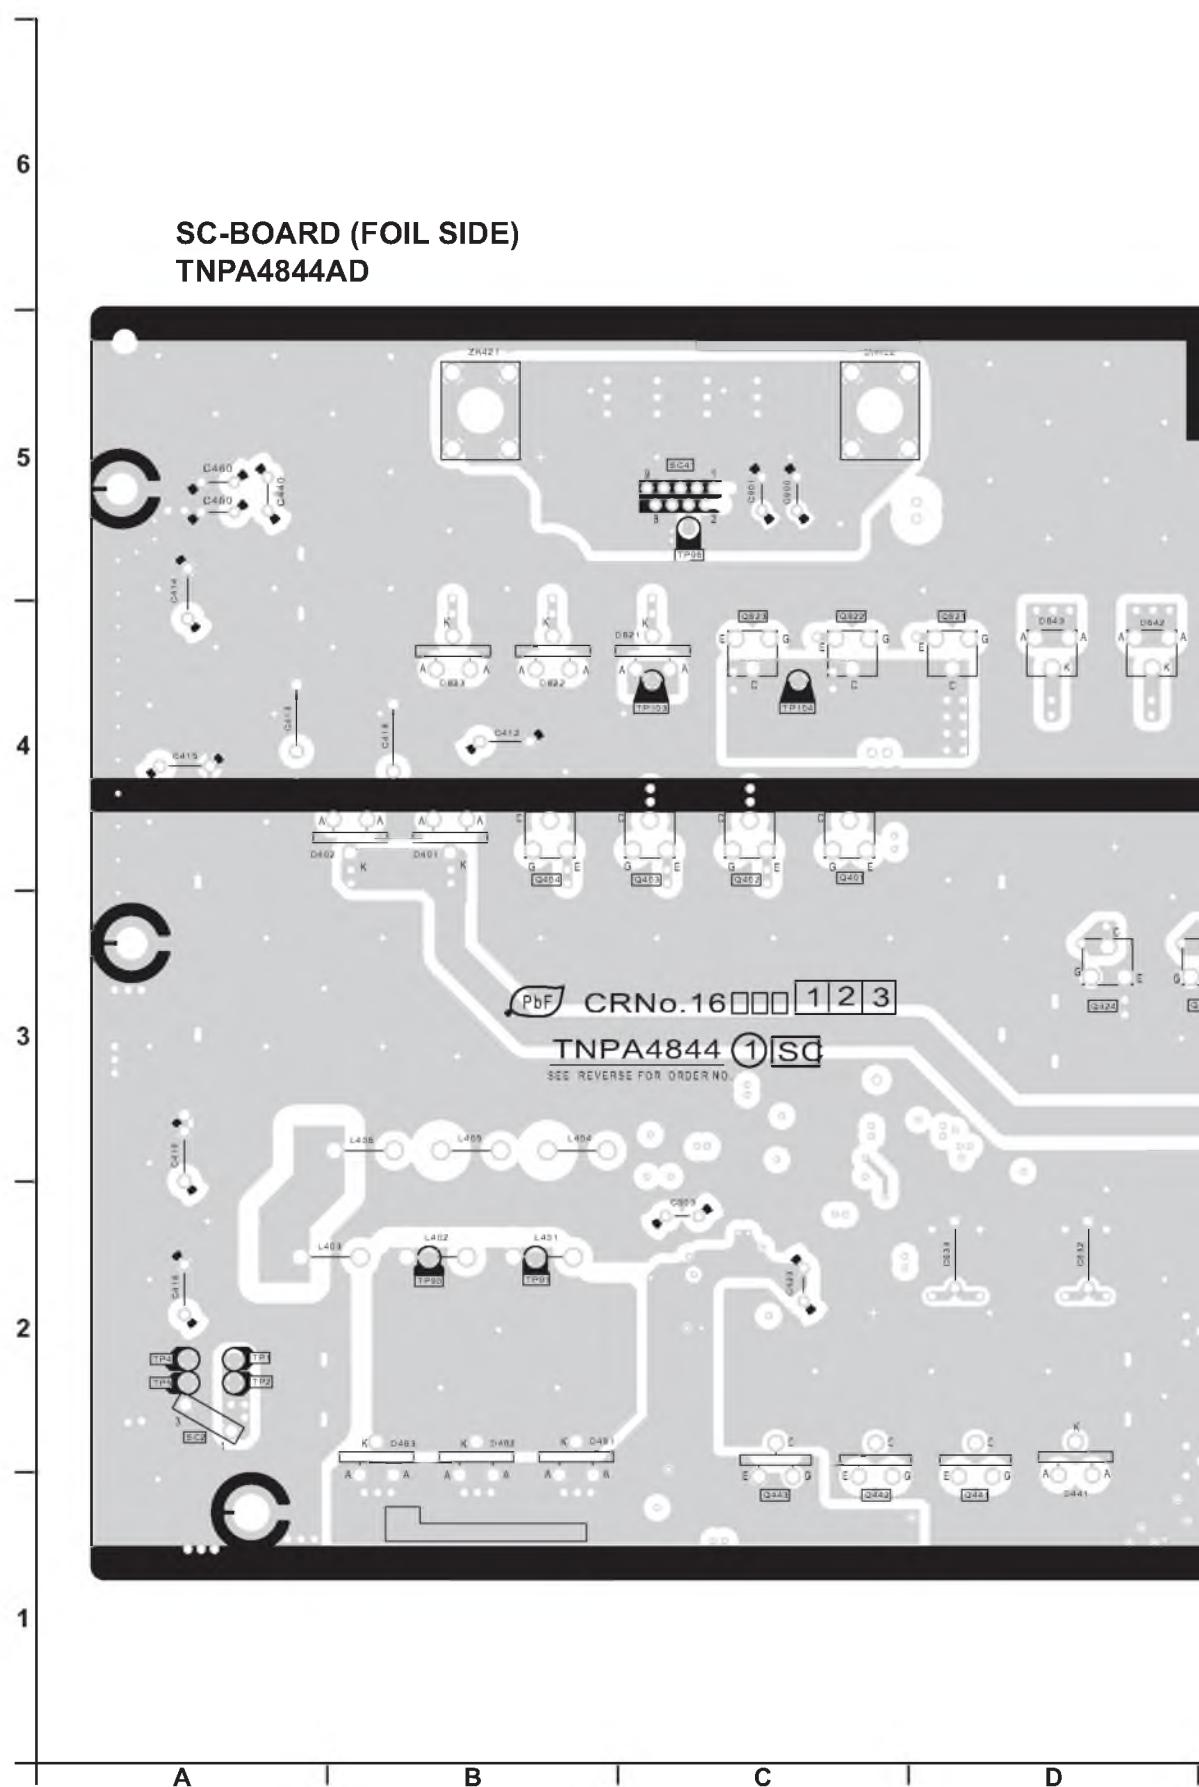

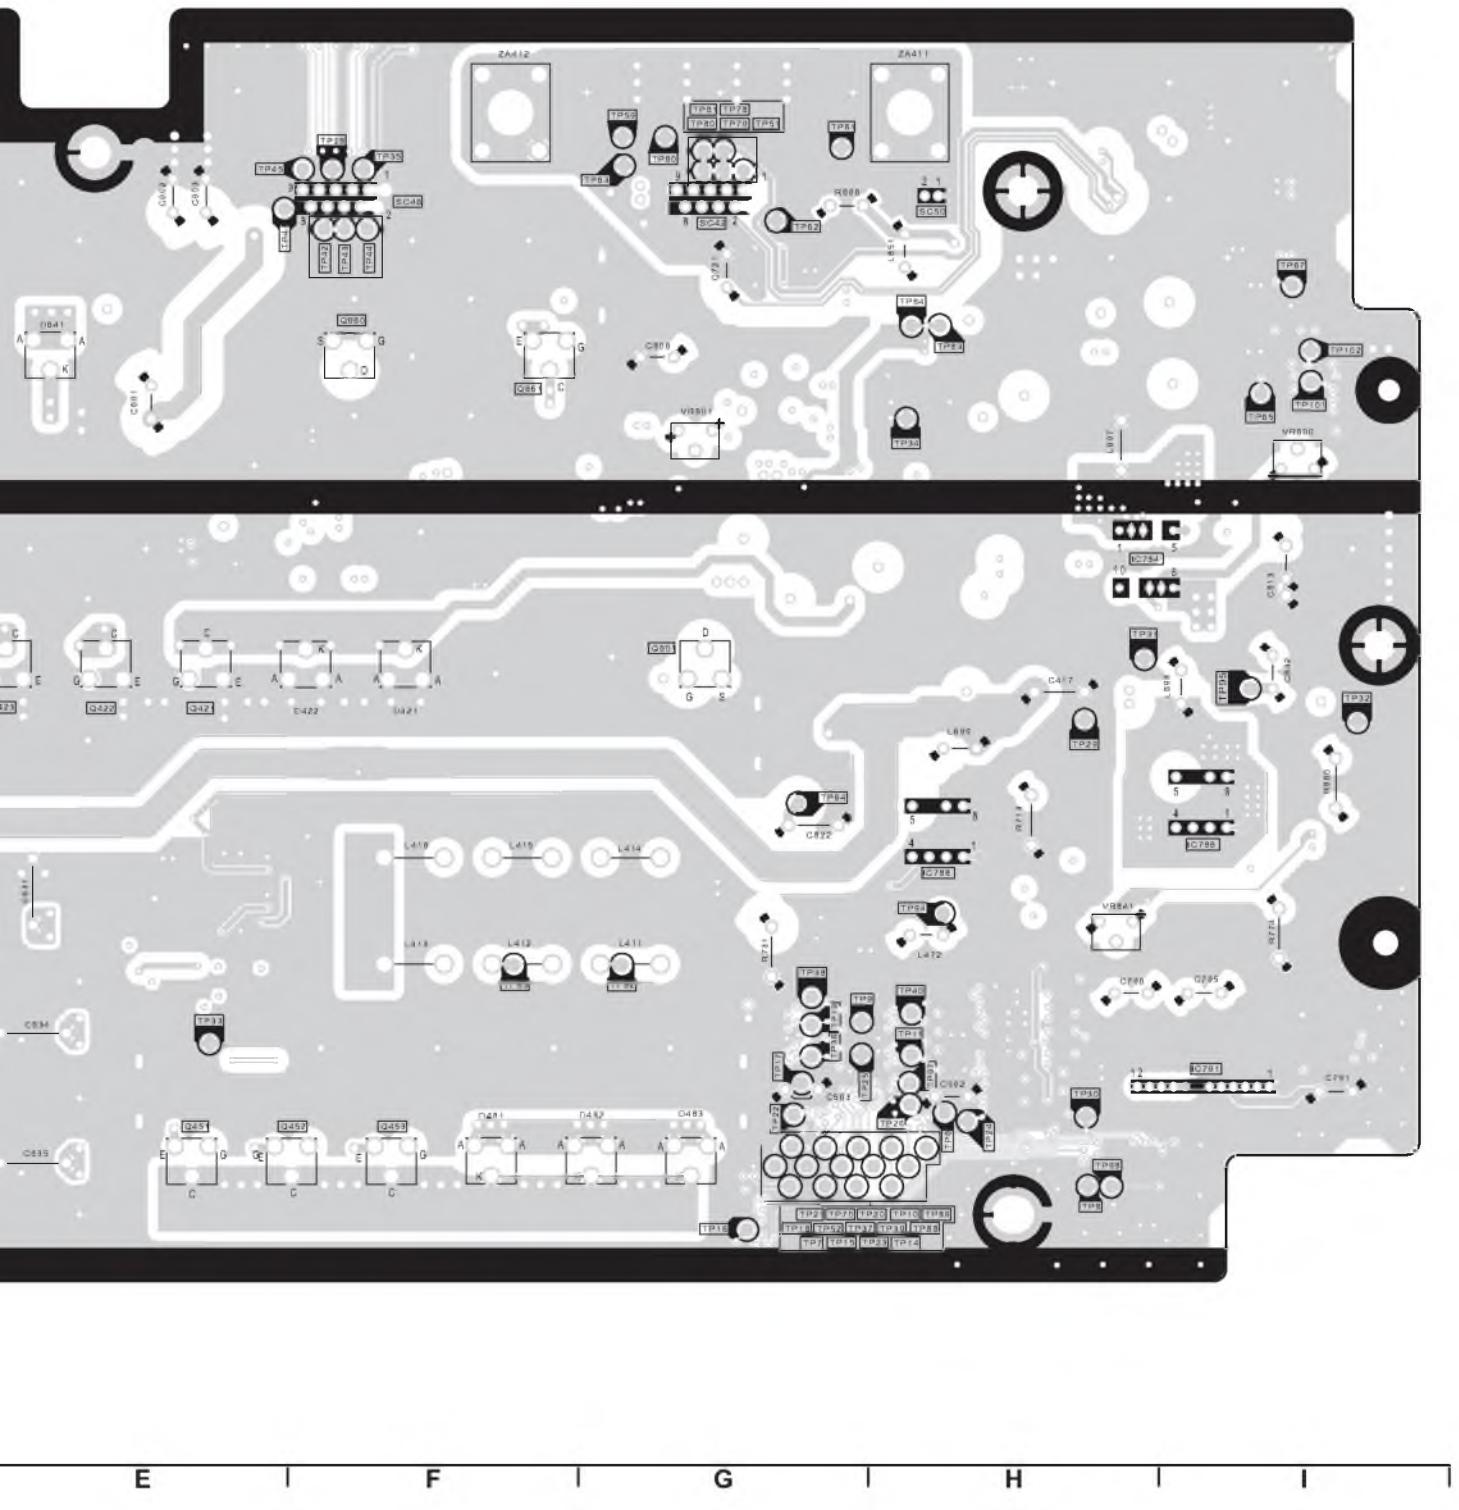

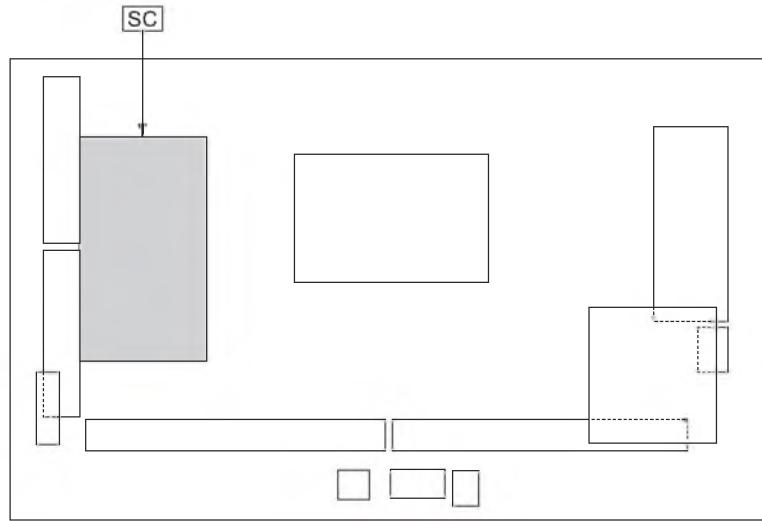

Parts Location

SC-BOARD (FOIL SIDE)					
IC		TEST POINT		TP41	E-5
IC16784	H-4	TP1	A-2	TP42	F-5
IC16786	I-3	TP2	A-2	TP43	F-5
IC16788	H-3	TP4	A-2	TP44	F-5
IC16791	I-2	TP5	A-2	TP45	E-5
TRANSISTOR		TP6	H-2	TP51	G-5
Q16401	C-4	TP7	G-1	TP52	G-1
Q16402	C-4	TP8	H-2	TP59	G-5
Q16403	C-4	TP9	G-2	TP60	G-5
Q16404	B-4	TP10	H-1	TP61	G-5
Q16421	E-3	TP11	H-2	TP62	G-5
Q16422	E-3	TP14	H-1	TP63	G-5
Q16423	E-3	TP15	G-1	TP64	G-3
Q16424	D-3	TP16	G-1	TP65	I-4
Q16441	D-1	TP17	G-2	TP67	I-5
Q16442	C-1	TP18	G-1	TP70	G-1
Q16443	C-1	TP19	G-2	TP78	G-5
Q16451	E-2	TP20	G-1	TP79	G-5
Q16452	F-2	TP21	G-1	TP80	G-5
Q16453	F-2	TP22	G-2	TP81	G-5
Q16601	G-3	TP23	G-1	TP83	H-4
Q16621	D-4	TP24	H-2	TP84	H-4
Q16622	C-4	TP25	G-2	TP88	H-1
Q16623	C-4	TP26	H-2	TP89	H-1
Q16660	F-4	TP28	F-5	TP90	B-2
Q16661	F-4	TP29	H-3	TP91	B-2
VOLUME		TP30	H-2	TP92	F-2
VR16600	I-4	TP31	H-3	TP93	G-2
VR16601	G-4	TP32	I-3	TP94	H-2
VR16841	H-2	TP33	E-2	TP95	I-3
		TP34	H-4	TP96	C-5
		TP35	F-5	TP97	H-2
		TP36	G-2	TP98	H-2
		TP37	G-1	TP101	I-4
		TP38	G-2	TP102	I-4
		TP39	H-1	TP103	C-4
		TP40	H-2	TP104	C-4

Parts Location

SC-BOARD (COMPONENT SIDE)						
IC		PHOTO COUPLER		Q16606	C-4	TEST POINT
IC16464	F-3	PC16461	F-3	Q16607	B-4	TP3
IC16465	F-2	PC16480	A-5	Q16608	D-4	TP46
IC16471	A-5	PC16601	A-4	Q16621	F-4	TP66
IC16490	A-5	PC16603	A-4	Q16622	G-4	TP68
IC16491	A-5	PC16684	A-4	Q16623	G-4	TP82
IC16501	G-3	PC16722	B-2	Q16624	C-4	TPSC1
IC16521	E-2	PC16723	A-3	Q16645	E-4	TPSOS6
IC16561	B-2	PC16896	A-4	Q16646	E-4	TPSOS7
IC16562	B-2			Q16647	E-4	TPVAD
IC16563	B-1			Q16649	E-4	TPVSCN
IC16564	C-5	Q16401	G-4	Q16660	D-4	TPVSET
IC16581	G-1	Q16402	G-4	Q16661	D-4	TPVSUS
IC16661	D-4	Q16403	H-4	Q16662	C-4	
IC16691	E-4	Q16404	H-4	Q16663	C-4	
IC16692	C-4	Q16421	E-3	Q16667	C-2	
IC16724	D-5	Q16422	E-3	Q16668	D-4	
IC16725	C-5	Q16423	E-3	Q16670	D-4	
IC16771	F-3	Q16424	F-3	Q16671	D-4	
IC16773	C-4	Q16441	F-1	Q16675	D-4	
IC16784	A-4	Q16442	G-1	Q16676	D-4	
IC16786	A-3	Q16443	G-1	Q16677	D-4	
IC16787	B-2	Q16451	E-1	Q16678	C-4	
IC16788	B-3	Q16452	E-1	Q16701	B-4	
IC16789	C-2	Q16453	D-1	Q16702	C-4	
IC16791	A-2	Q16471	B-5	Q16743	B-5	
IC16792	C-4	Q16490	A-5	Q16762	G-4	
IC16793	C-4	Q16501	G-3	Q16801	B-4	
IC16801	B-4	Q16502	G-3	Q16810	C-4	
IC16920	C-4	Q16521	E-3	Q16815	B-2	
		Q16522	E-2	Q16816	A-4	
		Q16531	G-2	Q16817	B-3	
		Q16532	H-2	Q16818	C-4	
		Q16551	E-2	Q16874	B-2	
		Q16552	E-2	Q16875	C-2	
		Q16601	C-3	Q16876	A-2	
		Q16602	B-4	Q16882	B-3	
		Q16603	C-3	Q16884	C-3	
		Q16604	C-4	Q16920	C-4	

VOLUME

VR16600 A-4
VR16601 C-4
VR16841 B-2

6

SC-BOARD (COMPONENT SIDE)
TNPA4844AD

5

4

3

2

1

A

B

C

D


E

F


G

H

I

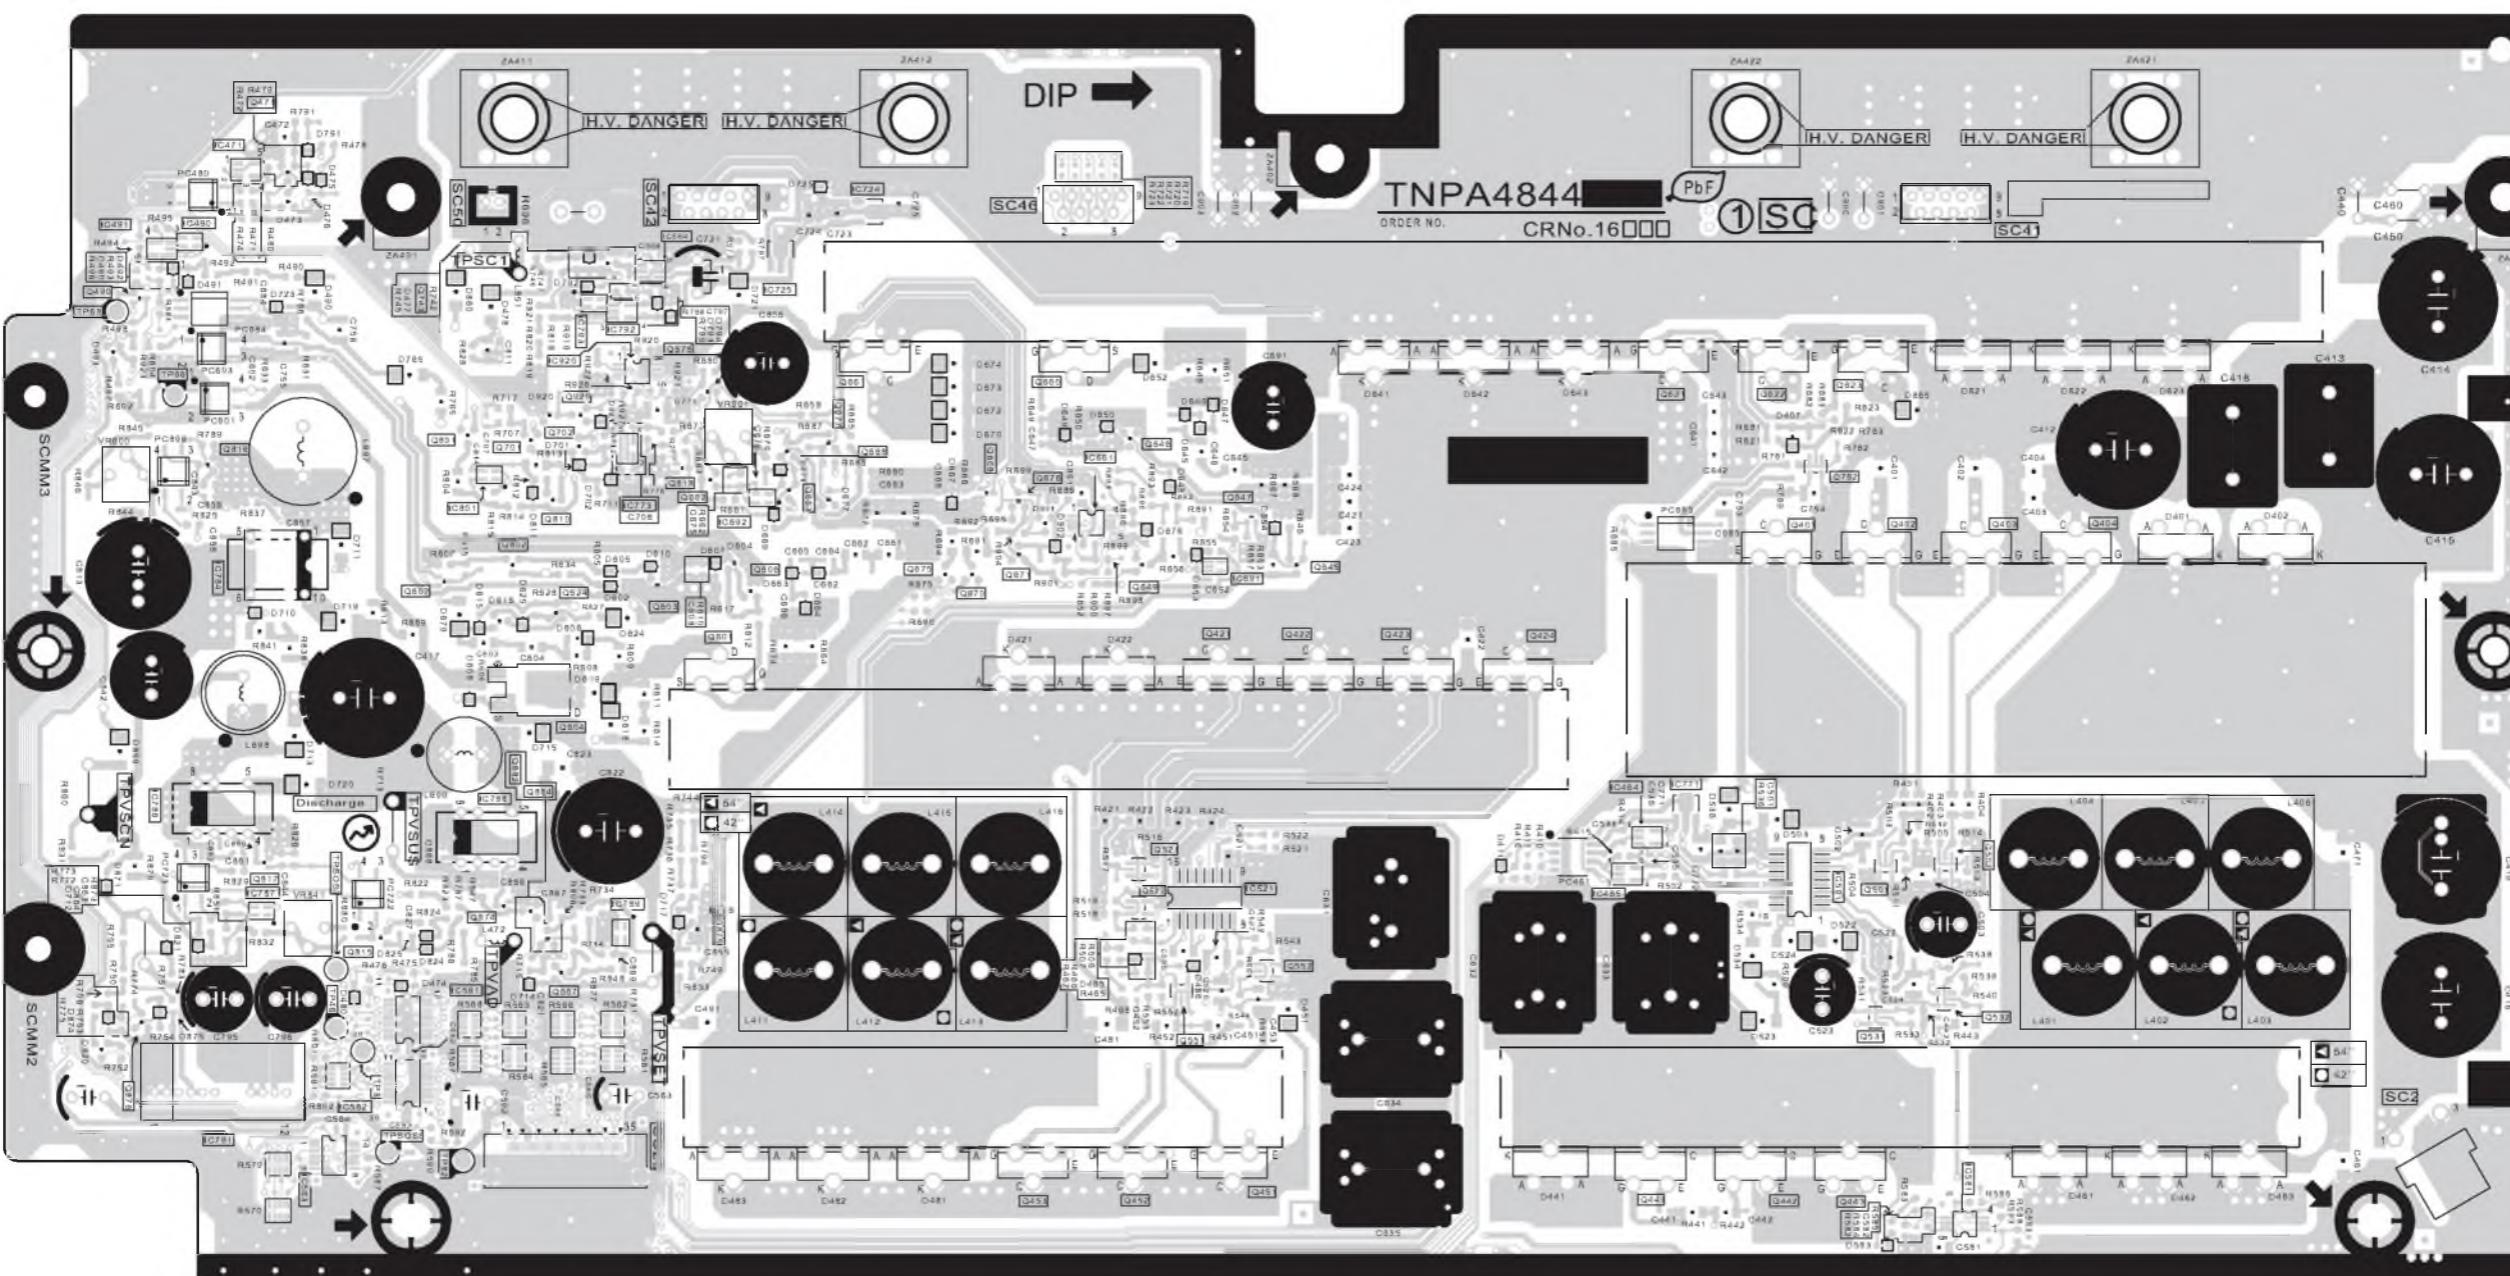


12.8. SS-Board

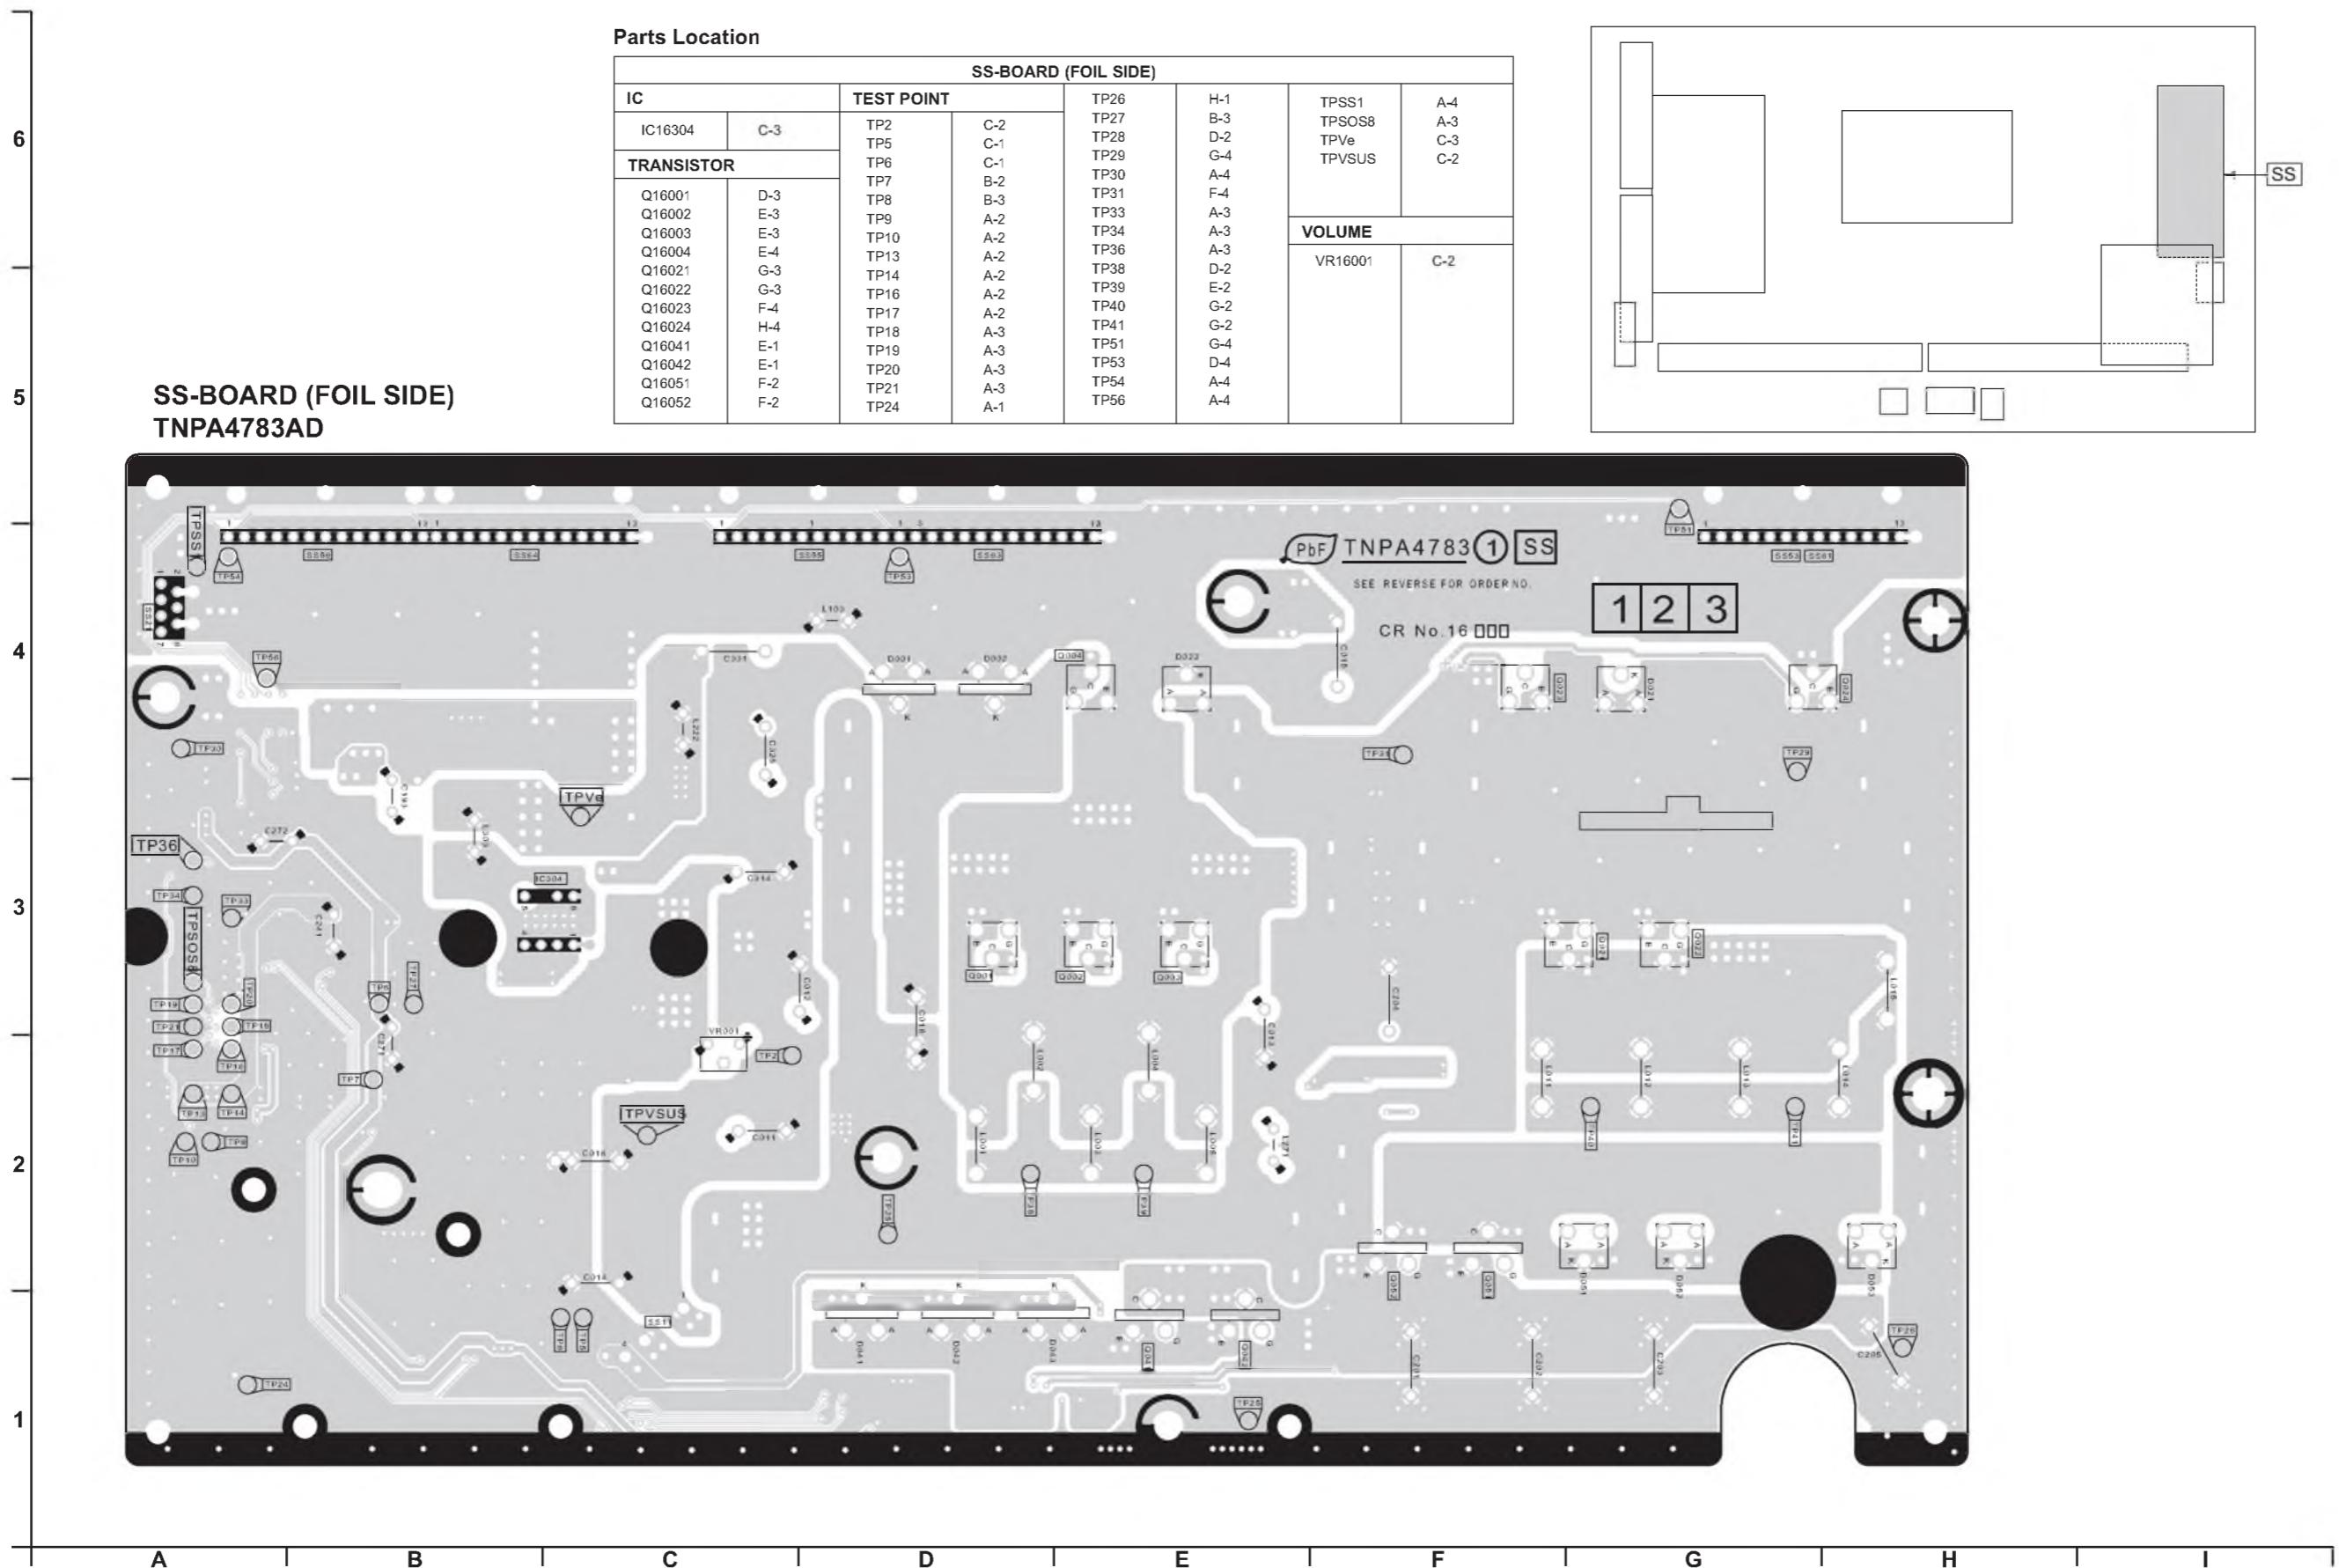


1
2
3
4
5
6

Parts Location

SS-BOARD (COMPONENT SIDE)											
IC		TRANSISTOR		Q16051		C-2		TEST POINT			
IC16131	C-4	Q16001	E-3	Q16052	C-2	TPSS1	E-4				
IC16151	E-1	Q16002	D-3	Q16055	D-1	TPSOS8	G-3				
IC16241	G-3	Q16003	D-3	Q16056	C-1	TPVe	F-4				
IC16251	G-2	Q16004	D-4	Q16101	F-4	TPVSUS	C-2				
IC16304	F-3	Q16021	C-3	Q16102	F-3						
IC16312	F-2	Q16022	B-3	Q16141	D-4						
		Q16023	C-4	Q16161	C-4						
		Q16024	A-4	Q16191	G-4						
		Q16041	D-1	Q16251	H-2						
		Q16042	D-1	Q16280	H-3						
PHOTO COUPLER											
PC16191	G-4										
PC16301	F-2										
VOLUME											
VR16001											
F-2											

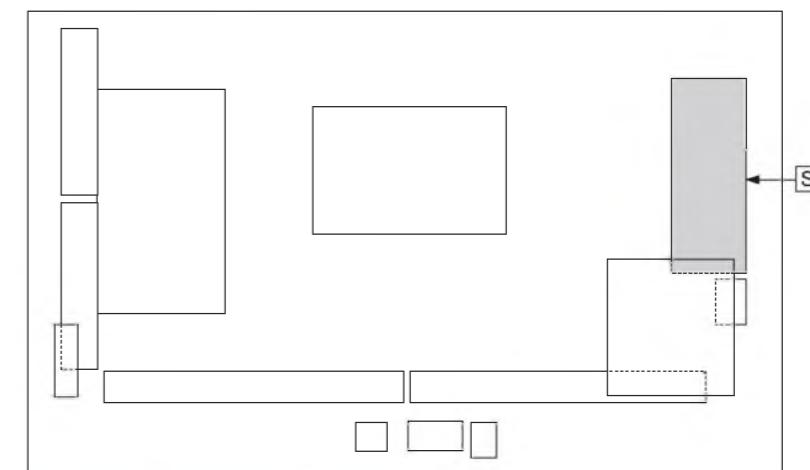

SS-BOARD (COMPONENT SIDE)
TNPA4783AD

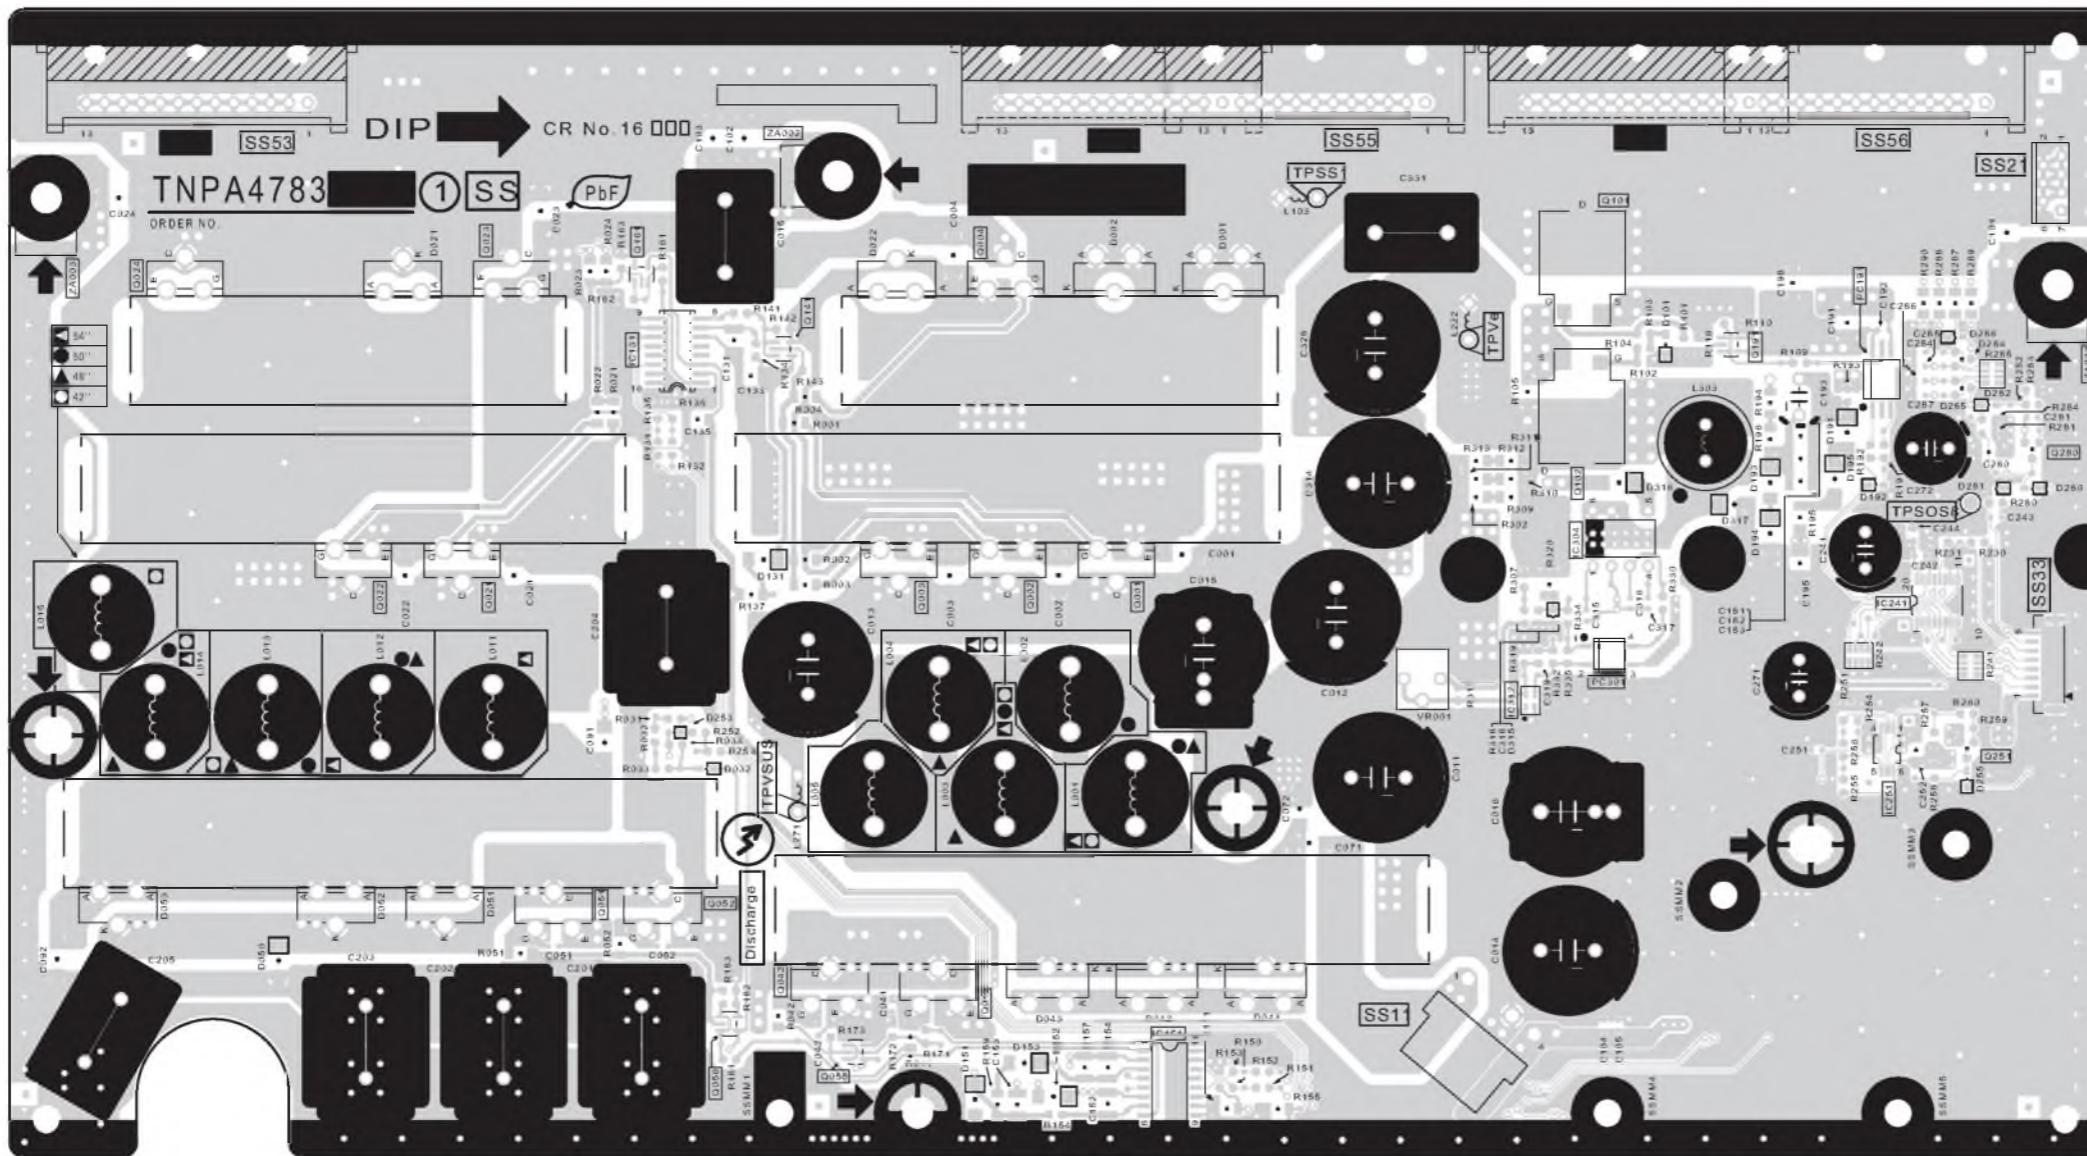


A B C D E F G H I


13 Exploded View and Replacement Parts List

13.1. Exploded View and Mechanical Replacement Parts List


13.1.1. Exploded View

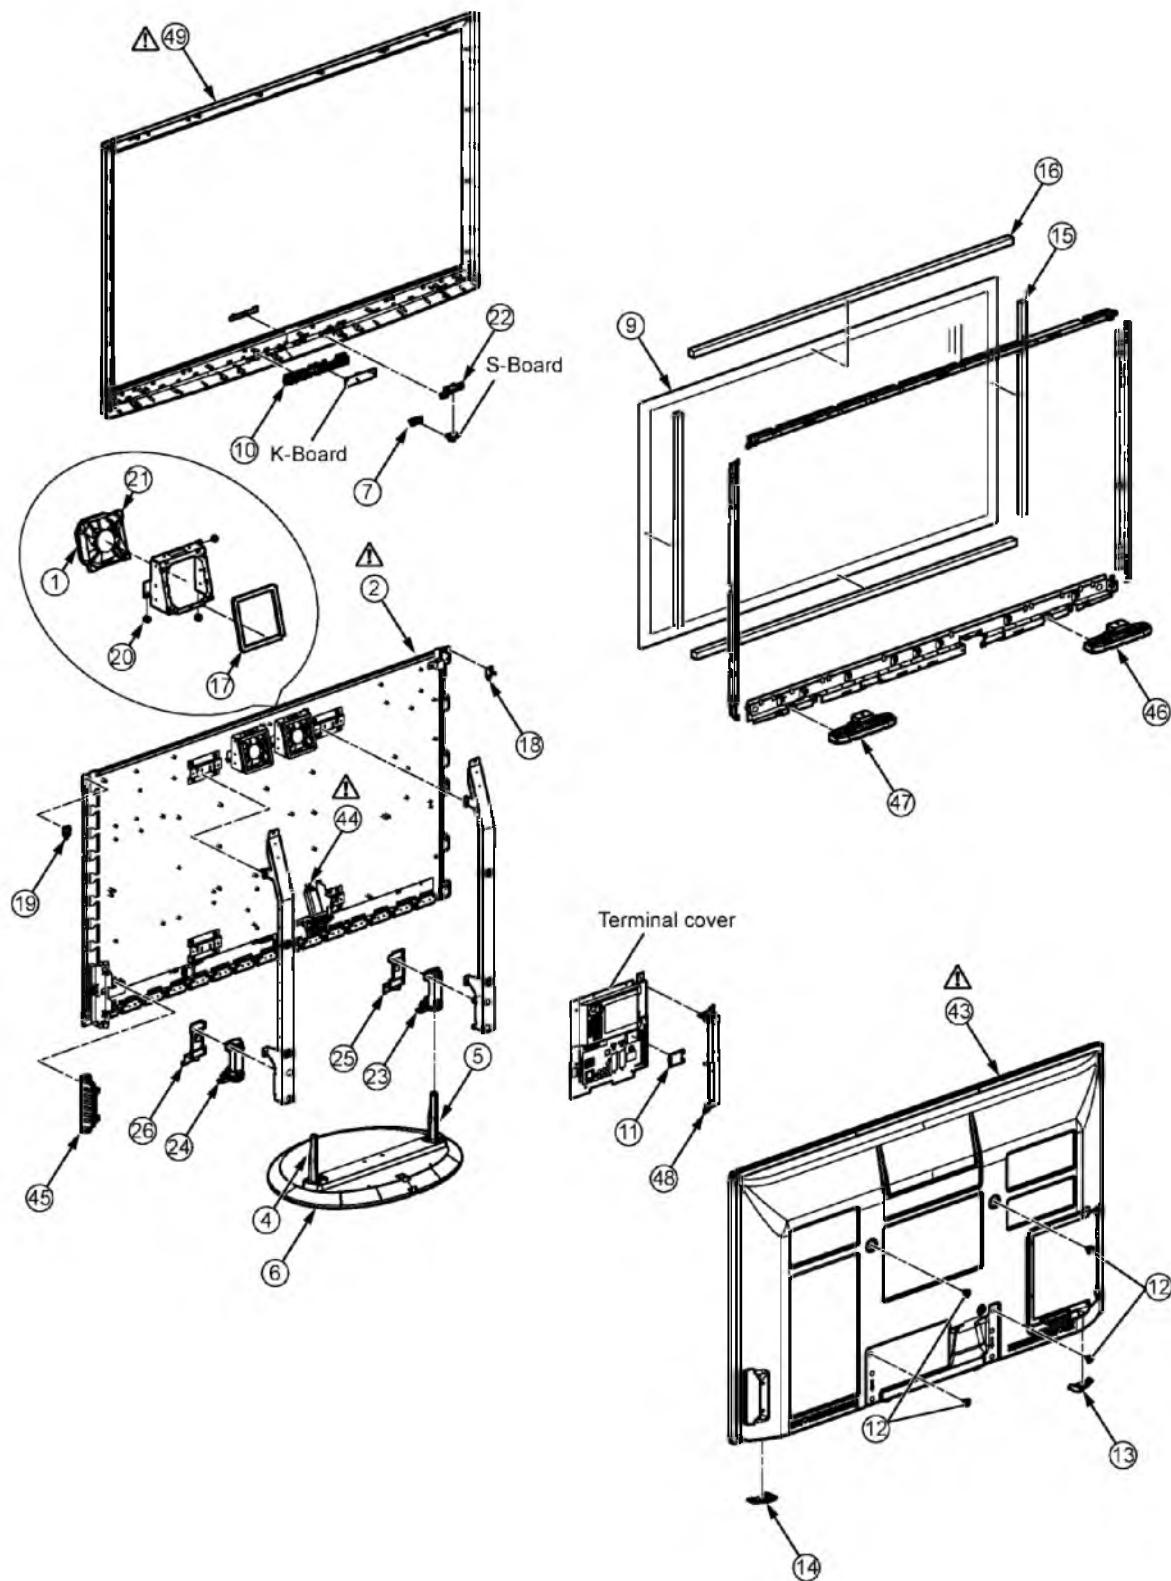

13.1.2. Packing 1

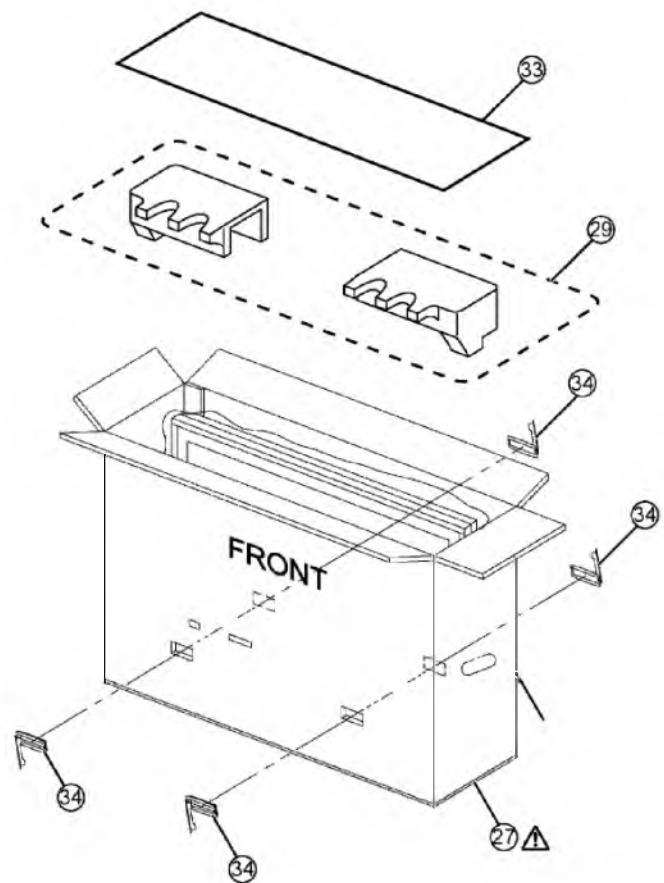

13.1.3. Packing 2

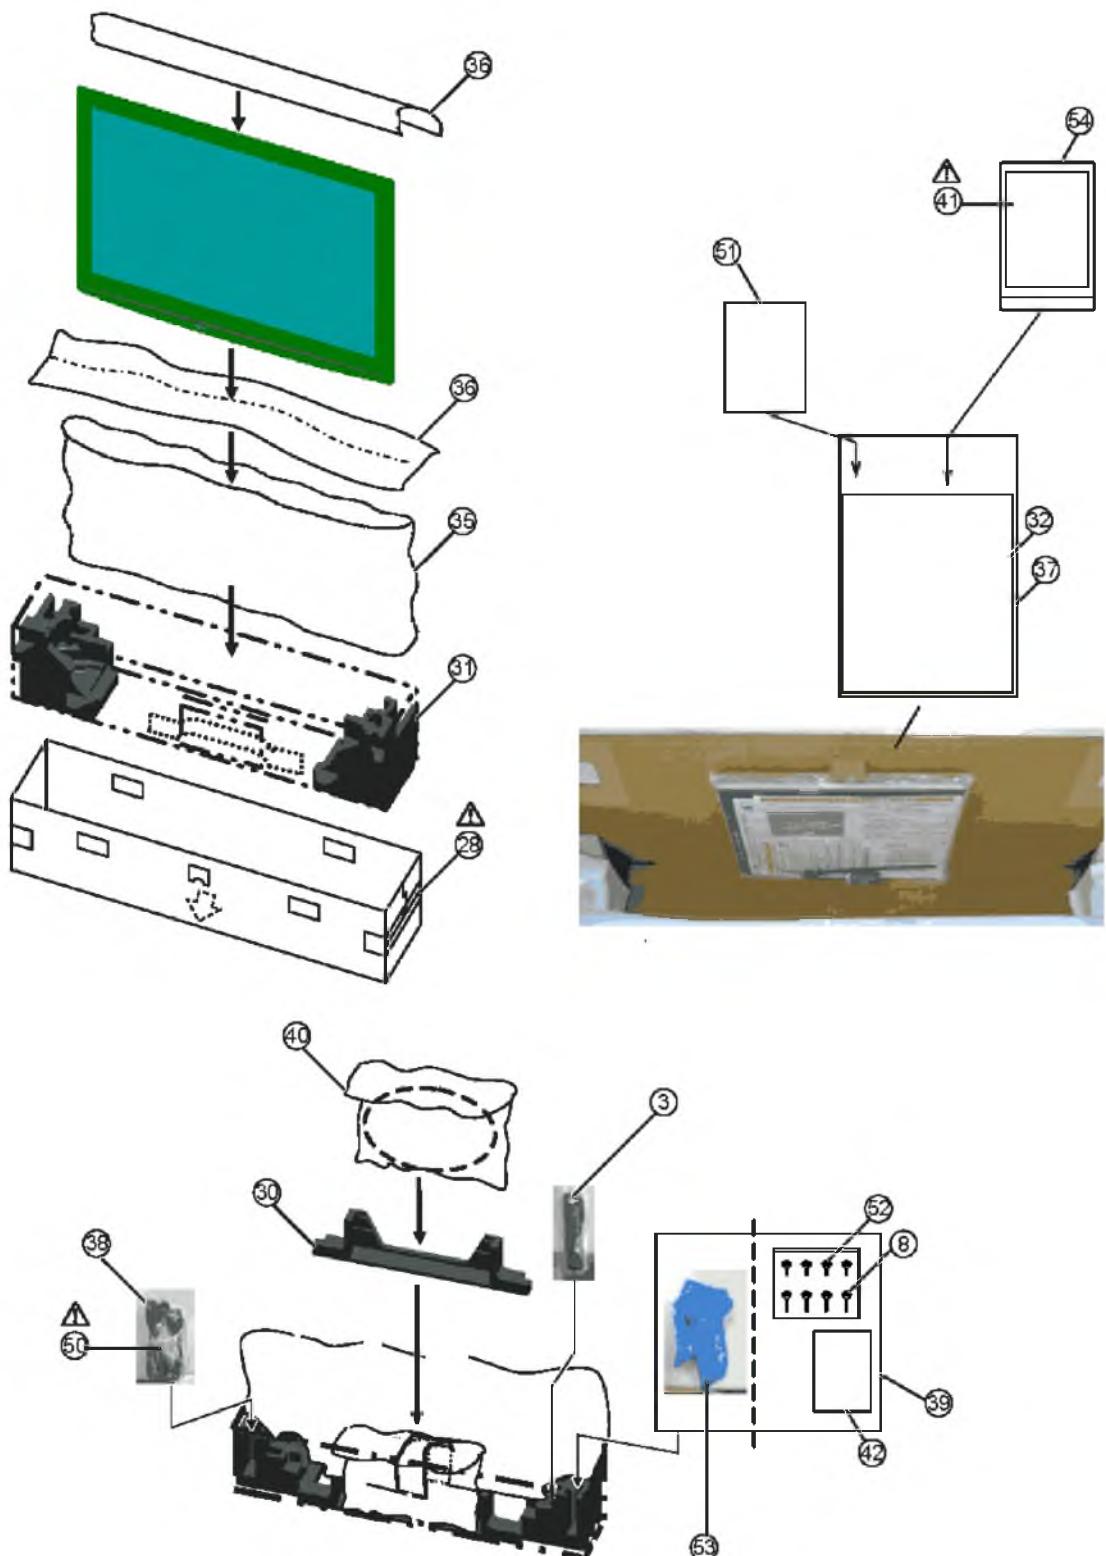

13.1.4. Mechanical Replacement Parts List

Note: All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by AVC-CSPC.
Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
		J0KG00000011	FERRITE CORE	1	
	50	K2CN3YY00004	AC CORD	1	PAVCCZ
	1	L6FAYYYH0095	FAN (80MM-T25)	2	
	2	MD42F12A1J	PLASMA DISPLAY PANEL	1	
	3	N2QAYB000356	REMOTE CONTROL	1	PAVCCZ
	4	TBLA3689	STAND POLE R	1	
	5	TBLA3690	STAND POLE L	1	
	6	TBLX0099	PEDESTAL STAND	1	PAVCCZ
	7	TBX3EA00101	POWER BUTTON	1	PAVCCZ
		THEC126N	STEP SCREW	2	PAVCCZ
		THEC128N	SLIM SCREW (M4X6)	4	
		THEJ016J	SCREW (AC INRET:2)	2	
		THEL0429	SCREW	11	
		THEL052Z	SCREW (BC TOP:4)	2	
	8	THEL062N	SCREW (STAND-TV)	4	
		THTD013N	SCREW	6	
		THTD020J	SCREW (A-PRINT:4)	4	
		THTF011N	SCREW	29	
		THTF011N	SCREW	38	
		THTF011N	SCREW	6	
		THTF013J	SCREW	2	
	9	TKGA5518	FRONT GLASS	1	PAVCCZ
	10	TKK3EC5003	LED PANEL	1	PAVCCZ
	11	TKK3EL5001-1	ADJUSTMENT COVER	1	PAVCCZ
	12	TKKL5472	M8 CAP	4	
	13	TKROE1901	REAR COVER HANDLE L	1	PAVCCZ
	14	TKROE2001	REAR COVER HANDLE R	1	PAVCCZ
	15	TMKOEG010	SPONGE (LEFT/RIGHT)	2	PAVCCZ
	16	TMKOEG011	SPONGE (UPPER/BOTTOM)	2	PAVCCZ
	17	TMKG667	SPONGE (FAN)	2	
		TMM23417	CLAMPER	2	
	18	TMMD014-1	REAR COVER HOOK L	1	
	19	TMMD015-1	REAR COVER HOOK R	1	
		TMME061	CLAMPER	1	
		TMME224	CLAMPER	4	
		TMME287	CLAMPER	3	
		TMME289	CLAMPER	1	
		TMME292	CLAMPER	2	
		TMME305	CLAMPER	1	
		TMME331	CLAMPER	2	
		TMME332	CLAMPER (FAN:3)	7	
		TMME345	SPACER	2	
	20	TMMJ068	RUBBER (FAN)	6	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	21	TMMJ082	SPONGE(FAN CORNER)	8	
	22	TMW3EC001	POWER BUTTON BRACKET	1	PAVCCZ
		TMXX055	AC CORD CLAMPER	2	
		TMXX062	AC CODE HOLDER	1	
	23	TMZ0E9911	STAND BRACKET L	1	PAVCCZ
	24	TMZ0E9912	STAND BRACKET R	1	PAVCCZ
	25	TMZX5167	STAND BRACKET METAL L	1	
	26	TMZX5168	STAND BRACKET METAL R	1	
	27	TPC0E53419	CARTON BOX TOP	1	PAVCCZ
	28	TPCOE53500	CARTON BOX BOTTOM	1	PAVCCZ
	29	TPDOE1092	TOP CUSHION	1	PAVCCZ
	30	TPDOE2060	PEDESTAL CUSHION	1	PAVCCZ
	31	TPDOE2076	BOTTOM CUSHION	1	PAVCCZ
	32	TPDOE9137	ACCESSORIES PAD	1	PAVCCZ
	33	TPDOE9157	TOP PAD	1	PAVCCZ
	34	TPD169487	JOINT	4	
	35	TPEOE4010	PROTECT COVER	1	PAVCCZ
	36	TPEOE4041	PROTECT SHEET	2	PAVCCZ
	37	TPEOE9002	ACCESSORIES BAG	1	PAVCCZ
	38	TPEOE9003	BAG FOR AC CORD	1	PAVCCZ
	39	TPEB341	STAND ACCESSORY BAG	1	PAVCCZ
	40	TPEB368	BAG (PEDESTAL STAND)	1	PAVCCZ
		TPGOE9310	PAPER CAP	0.25	PAVCCZ
	41	TQBOE0799L	INSTRUCTION BOOK(RUSSIAN)	1	PAVCCZ
	41	TQBOE0799Y	INSTRUCTION BOOK(UKRAINIAN)	1	PAVCCZ
	42	TQZJ061	SCREW USE HANDBILL	1	
		TSXL519	CABLE(C10-C20/SU11-SD11)	2	
		TSXL814	CABLE (A20-SC20)	1	PAVCCZ
		TSXL817	CABLE (C11-A31)	1	PAVCCZ
		TSXL820	CABLE (C21-A32)	1	PAVCCZ
	43	TTUOE0504	REAR COVER	1	PAVCCZ
	44	TXAJS01EBUE	AC INLET ASSY	1	PAVCCZ
	45	TXFBX03BQUE	CONTROL BUTTON ASSY	1	PAVCCZ
	46	TXFEA01EBUE	SPEAKER L ASSY	1	PAVCCZ
	47	TXFEA02EBUE	SPEAKER R ASSY	1	PAVCCZ
	48	TXFKP01EQUR	SIDE TERMINAL COVER ASSY	1	PAVCCZ
	49	TXFKY01EBUE	CABINET ASSY	1	PAVCCZ
	51	TXFPE01RLTB	CLEANING CLOTH ASSY	1	PAVCCZ
		TXFUX03BQUE	GLASS HOLDER SIDE ASSY	2	PAVCCZ
		TXJA11EBUE	SPEAKER LEAD(A11-TERMINAL SP+/SP-)	1	PAVCCZ
		TXJA12ERUE	SPEAKER LEAD(A12-SPL)	1	PAVCCZ
		XSB3+6FJ	SCREW	3	
		XTB4+10JFJ	SCREW (STAND BRACKET)	8	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
		XTB4+12GFJ	SCREW	25	
		XTB4+12GFJK	SCREW	11	
		XTB4+12GFN	SCREW	8	
		XTV3+10JFJK	SCREW	4	
		XTV3+8JFJ	SCREW	2	
		XTW3+10TFJ	SCREW	1	
		XTWT4+Z15DFJ	SCREW (SP BOX)	4	
		XYN3+J12FJ	SCREW	41	
		XYN4+E8FJ	SCREW	1	
		XYN4+F10FJ	SCREW	12	
		XYN4+F10FJ	SCREW	18	
52		XYN5+F18FN	SCREW (STAND POLE)	4	
53		XZB17X19C03	POLY BAG (STAND POLE)	1	
54		XZBT6506	POLY BAG (INSTRUCTION BOOK)	1	

13.2. Electrical Replacement Parts List

13.2.1. Replacement Parts List Notes

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

2. Capacitor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W

Type Allowance

Example:

ECKF1H103ZF C 0.01UF, Z, 50V

Type Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide Metal Film	J : $\pm 5\%$
S : Solid	K : $\pm 10\%$
W : Wire Wound	M : $\pm 20\%$

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
	G : $\pm 3\text{pF}$
	J : $\pm 5\text{pF}$
T : Tantalum	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : $+100\%, -0\%$
	Z : $+80\%, -20\%$

13.2.2. Electrical Replacement Parts List

Note: All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by AVC-CSPC.
Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
A1	K1KA14A00248	14P CONNECTOR	1		
A7	K1KY22A00003	22P CONNECTOR	1		
A8	K1KA06A00508	6P CONNECTOR	1		
A11	K1KA03AA0728	3P CONNECTOR	1		
A12	K1KA02AA0728	2P CONNECTOR	1		
A20	K1MY35BA0345	35P CONNECTOR	1		
A25	K1KA13A00152	13P CONNECTOR	1		
A31	K1MY68BA0345	68P CONNECTOR	1		
A32	K1MY68BA0345	68P CONNECTOR	1		
C608	F1G1E103A123	C 0.010UF, K, 25V	1		
C609	F2G0J470A019	E 47UF 6.3V	1		
C1009	F1H1C104A143	C 0.1UF, K, 16V	1		
C1010	F1J1E105A171	C 1 UF 25V	1		
C1102	F1J1A106A043	C 0.010UF, K, 10V	1		
C1103	F1G1C104A116	C 0.10UF, K, 16V	1		
C1104	F1G1C104A116	C 0.10UF, K, 16V	1		
C1105	F1H1H103A970	C 0.001UF, K, 50V	1		
C1106	F1H1H270A971	C 27UF, 50V	1		
C1107	F1G1H180A731	C 18UF, 50V	1		
C1108	F1G1C104A116	C 0.10UF, K, 16V	1		
C1109	F1H1A1050032	C 10UF, 50V	1		
C1111	F1H1A1050032	C 10UF, 50V	1		
C1112	F1G1C104A116	C 0.10UF, K, 16V	1		
C1114	F1G1C104A116	C 0.10UF, K, 16V	1		
C1117	F1G1C104A116	C 0.10UF, K, 16V	1		
C1122	F1G1E103A123	C 0.010UF, K, 25V	1		
C1123	F1H1A1050032	C 10UF, 50V	1		
C2023	F1G1C104A116	C 0.10UF, K, 16V	1		
C2049	F1G1C104A116	C 0.10UF, K, 16V	1		
C2050	F1G1C104A116	C 0.10UF, K, 16V	1		
C2055	F1G1H150A731	C 15UF, 50V	1		
C2056	F1G1H150A731	C 15UF, 50V	1		
C2058	F1G1C104A116	C 0.10UF, K, 16V	1		
C2059	F1J1A106A043	C 0.010UF, K, 10V	1		
C2091	F1G1H100A731	C 10PF, K, 50V	1		
C2092	F1G1H220A731	C 22UF, 50V	1		
C2094	F1G1E333A091	C 0.033UF, K, 25V	1		
C2095	F1G1E333A091	C 0.033UF, K, 25V	1		
C2096	F1G1C104A116	C 0.10UF, K, 16V	1		
C2098	EEEBH0J221UP	C 220PF, J, 6.3V	1		
C2099	EEEBH0J221UP	C 220PF, J, 6.3V	1		
C2102	F1G1C104A116	C 0.10UF, K, 16V	1		
C2105	F1G1C104A116	C 0.10UF, K, 16V	1		
C2106	F1G1C104A116	C 0.10UF, K, 16V	1		
C2107	F1J1A106A043	C 0.010UF, K, 10V	1		
C2108	F1J1A106A043	C 0.010UF, K, 10V	1		
C2109	F1G1C104A116	C 0.10UF, K, 16V	1		
C2110	F1G1C104A116	C 0.10UF, K, 16V	1		
C2111	F1J1A475A039	C 4.7UF, K, 10V	1		
C2112	F1J1A106A043	C 0.010UF, K, 10V	1		
C2113	F1J1A106A043	C 0.010UF, K, 10V	1		
C2114	F1G1C104A116	C 0.10UF, K, 16V	1		

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2115	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2118	F1J1A475A039	C 4.7UF, K, 10V	1	
	C2120	F1G1H560A731	C 56UF, 50V	1	
	C2121	F1G1H560A731	C 56UF, 50V	1	
	C2122	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2123	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2124	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2125	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2127	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2128	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2129	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2135	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2136	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2137	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2192	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2216	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2244	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2245	F1G1H102A730	C 1000UF, 50V	1	
	C2251	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2261	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2262	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2263	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2264	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2303	F1J1E105A171	C 1 UF 25V	1	
	C2305	F1J1E105A171	C 1 UF 25V	1	
	C2309	F1J1E105A171	C 1 UF 25V	1	
	C2313	F1H1A1050032	C 10UF, 50V	1	
	C2317	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2319	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2321	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2323	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2325	F1J1H474A757	C 0.47UF, 50V	1	
	C2331	F1J1H474A757	C 0.47UF, 50V	1	
	C2333	F1H1E104A129	C 0.1UF, 25V	1	
	C2335	F1H1E104A129	C 0.1UF, 25V	1	
	C2337	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2339	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2341	F1H1E104A129	C 0.1UF, 25V	1	
	C2343	F1H1E104A129	C 0.1UF, 25V	1	
	C2345	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2347	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2353	F1G1H102A730	C 1000UF, 50V	1	
	C2359	F1G1H102A730	C 1000UF, 50V	1	
	C2361	F2G1E4710007	E 470UF, 25V	1	
	C2375	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2377	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2379	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2381	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2383	F1G1H102A730	C 1000UF, 50V	1	
	C2385	F1G1H102A730	C 1000UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2387	F1G1H102A730	C 1000UF, 50V	1	
	C2389	F1G1H102A730	C 1000UF, 50V	1	
	C2390	F1J1E105A171	C 1 UF 25V	1	
	C2407	F1K1E106A136	C 10UF, Z, 25V	1	
	C2408	F1J1E105A171	C 1 UF 25V	1	
	C2409	F1G1H102A730	C 1000UF, 50V	1	
	C2410	F1J1E105A171	C 1 UF 25V	1	
	C2411	F1J1E105A171	C 1 UF 25V	1	
	C2412	F1J1E105A171	C 1 UF 25V	1	
	C2511	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2512	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2515	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2521	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2801	F1K1C1060004	C 0.010UF, 16V	1	
	C2802	F1H1E104A129	C 0.1UF, 25V	1	
	C2803	F1G1E103A123	C 0.010UF, K, 25V	1	
	C2805	F1H1H472A970	C 4700PF, K, 50V	1	
	C2806	F1H1E104A129	C 0.1UF, 25V	1	
	C2807	F1K1E106A136	C 10UF, Z, 25V	1	
	C2809	F1K1C1060004	C 0.010UF, 16V	1	
	C2821	F1J1E104A227	C 0.10UF, Z, 25V	1	
	C2871	F1K1E106A136	C 10UF, Z, 25V	1	
	C2872	F1G1E103A123	C 0.010UF, K, 25V	1	
	C2873	F1H1E104A129	C 0.1UF, 25V	1	
	C2874	F2G1A101A019	E 100UF, 10V	1	
	C2875	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2878	F1H1H472A970	C 4700PF, K, 50V	1	
	C2901	F2G1A101A019	E 100UF, 10V	1	
	C2906	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2907	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2912	F2G0J101A019	E 100UF 6.3V	1	
	C2914	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2916	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2920	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2922	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2923	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2925	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2940	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2960	F1H0J1050012	C 1UF, K, 16V	1	
	C2961	F1G1H471A731	C 470UF, 50V	1	
	C2962	F1H0J1050012	C 1UF, K, 16V	1	
	C3002	F1G1H561A730	C 56UF, 50V	1	
	C3003	F1G1H561A730	C 56UF, 50V	1	
	C3004	F1G1H561A730	C 56UF, 50V	1	
	C3005	F1G1H561A730	C 56UF, 50V	1	
	C3007	F1G1H561A730	C 56UF, 50V	1	
	C3008	F1G1H561A730	C 56UF, 50V	1	
	C3009	F1G1H561A730	C 56UF, 50V	1	
	C3010	F1G1H561A730	C 56UF, 50V	1	
	C3011	F1G1H561A730	C 56UF, 50V	1	
	C3012	F1G1H561A730	C 56UF, 50V	1	
	C3013	F1G1H561A730	C 56UF, 50V	1	
	C3014	F1G1H561A730	C 56UF, 50V	1	
	C3018	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3019	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3020	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3021	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3022	F1H1A1050032	C 10UF, 50V	1	
	C3024	F1H1A1050032	C 10UF, 50V	1	
	C3025	F1H1A1050032	C 10UF, 50V	1	
	C3026	F1H1A1050032	C 10UF, 50V	1	
	C3027	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3028	F1J1A106A043	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3029	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3030	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3039	F1H1A1050032	C 10UF, 50V	1	
	C3041	F1H1A1050032	C 10UF, 50V	1	
	C3043	F1H1A1050032	C 10UF, 50V	1	
	C3044	F1H1A1050032	C 10UF, 50V	1	
	C3046	F1H1A1050032	C 10UF, 50V	1	
	C3047	F1H1A1050032	C 10UF, 50V	1	
	C3048	F1H1A1050032	C 10UF, 50V	1	
	C3049	F1H1A1050032	C 10UF, 50V	1	
	C3064	F1G1H102A730	C 1000UF, 50V	1	
	C3065	F1G1H102A730	C 1000UF, 50V	1	
	C3070	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3071	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3073	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3074	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3075	F1H1A1050032	C 10UF, 50V	1	
	C3077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3083	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3084	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3085	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3086	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3087	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3088	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3089	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3090	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3091	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3092	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3095	F2G1A101A019	E 100UF, 10V	1	
	C3097	F2G1A101A019	E 100UF, 10V	1	
	C3099	F1G1H561A730	C 56UF, 50V	1	
	C3102	F2G1A101A019	E 100UF, 10V	1	
	C3103	F2G1A101A019	E 100UF, 10V	1	
	C3107	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3108	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3109	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3114	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3115	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3116	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3117	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3118	F1H1A1050032	C 10UF, 50V	1	
	C3119	F1H1A1050032	C 10UF, 50V	1	
	C3139	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3140	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3141	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3143	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3144	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3145	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3146	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3147	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3257	F1G1H561A730	C 56UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3752	F1J1H102A836	C 1000UF, 50V	1	
	C4500	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4501	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4502	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4503	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4533	F1G1H680A731	C 68UF, 50V	1	
	C4534	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4537	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4548	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4549	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4550	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4551	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4552	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4553	F1G1H102A730	C 1000UF, 50V	1	
	C4554	F2G1C470A022	E 47UF, 16V	1	
	C4555	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4567	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4574	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4575	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4580	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4585	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4595	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4596	F1G1A105A047	C 1UF, K, 10V	1	
	C4598	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4599	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4600	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4601	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4602	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4603	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4606	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4607	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4613	F1H0J1050012	C 1UF, K, 16V	1	
	C4614	F1G1A105A047	C 1UF, K, 10V	1	
	C4616	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4617	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4619	F1G1A105A047	C 1UF, K, 10V	1	
	C4624	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4625	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4628	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4629	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4630	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4631	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4632	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4633	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4634	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4635	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4642	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4643	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4644	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4645	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4702	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4703	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5470	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5471	F1G1A473A053	C 0.47UF, 10V	1	
	C5473	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5482	F2G1A221A149	E 220UF, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5483	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5484	F2G0J470A019	E 47UF 6.3V	1	
	C5485	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5486	F1G1E392A123	C 3900UF, Z, 25V	1	
	C5487	F1H0J1050012	C 1UF, K, 16V	1	
	C5488	F1H0J1050012	C 1UF, K, 16V	1	
	C5490	F1J1H474A757	C 0.47UF, 50V	1	
	C5491	F1J1H474A757	C 0.47UF, 50V	1	
	C5494	F1G1H820A731	C 82UF, 50V	1	
	C5495	F2G1V220A020	E 22UF, 35V	1	
	C5496	F1G1H102A730	C 1000UF, 50V	1	
	C5520	F2G1C100A022	C 10UF J 16V	1	
	C5600	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5601	F1G1H272A571	C 2700UF, 50V	1	
	C5602	F2H0J1010009	C 100UF, 6.3V	1	
	C5603	F1H1C105A145	C 0.01UF, K, 16V	1	
	C5604	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5606	F1G1E6820007	C 6800UF, Z, 25V	1	
	C5607	F1G1H152A571	C 1500UF, 50V	1	
	C5608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5611	F1K1E106A136	C 10UF, Z, 25V	1	
	C5612	F1K1E106A136	C 10UF, Z, 25V	1	
	C5615	F1K1E106A136	C 10UF, Z, 25V	1	
	C5616	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5620	F1H1E104A129	C 0.1UF, 25V	1	
	C5621	F1H1C105A145	C 0.01UF, K, 16V	1	
	C5622	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5623	F1G1H272A571	C 2700UF, 50V	1	
	C5624	F1G1H3320004	C 3300UF, 50V	1	
	C5625	F1G1C273A081	C 0.027UF, K, 16V	1	
	C5626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5627	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5628	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C5629	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C5636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5639	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5641	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5642	F1K1E106A136	C 10UF, Z, 25V	1	
	C5643	F1H1E104A129	C 0.1UF, 25V	1	
	C5645	F1K1E106A136	C 10UF, Z, 25V	1	
	C5646	F1K1E106A136	C 10UF, Z, 25V	1	
	C5648	F2H0J1010009	C 100UF, 6.3V	1	
	C5649	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5657	F1H1A225A051	C 22UF, 50V	1	
	C5658	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5696	F2G1E470A021	C 47PF, J, 25V	1	
	C5697	F1J1E105A171	C 1 UF 25V	1	
	C5699	F1K1E106A136	C 10UF, Z, 25V	1	
	C5700	F1K1E106A136	C 10UF, Z, 25V	1	
	C5722	F1J1E105A171	C 1 UF 25V	1	
	C5723	F1H1C105A145	C 0.01UF, K, 16V	1	
	C5727	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5728	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8003	F1H0J1050012	C 1UF, K, 16V	1	
	C8005	F1H0J1050012	C 1UF, K, 16V	1	
	C8006	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8007	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8009	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8010	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8013	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8015	F1H0J1050012	C 1UF, K, 16V	1	
	C8016	F1H0J1050012	C 1UF, K, 16V	1	
	C8017	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8018	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8019	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8020	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8021	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8022	F1H0J1050012	C 1UF, K, 16V	1	
	C8023	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8024	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8025	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8026	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8027	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8030	F1H0J1050012	C 1UF, K, 16V	1	
	C8031	F1H0J1050012	C 1UF, K, 16V	1	
	C8032	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8033	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8034	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8035	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8036	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8037	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8038	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8039	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8040	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8041	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8042	ECGRL0G680ER	C 68UF, J, 4V	1	
	C8043	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8044	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8045	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8046	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8047	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8048	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8051	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8052	F1H0J1050012	C 1UF, K, 16V	1	
	C8053	F1G1C103A116	C 0.010UF, K, 16V	1	
	C8054	F1G1H150A731	C 15UF, 50V	1	
	C8055	F1G1HR50A577	C 0.50UF, 50V	1	
	C8056	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8058	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8063	F1H0J1050012	C 1UF, K, 16V	1	
	C8064	F1H0J1050012	C 1UF, K, 16V	1	
	C8065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8067	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8069	F1G1H102A730	C 1000UF, 50V	1	
	C8070	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8071	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8073	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8074	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8075	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8076	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8078	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8079	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8080	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8081	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8082	F1G1H102A730	C 1000UF, 50V	1	
	C8083	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8084	F1G1H102A730	C 1000UF, 50V	1	
	C8085	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8086	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8087	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8088	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8089	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8090	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8092	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8093	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8094	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8095	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8096	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8097	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8098	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8201	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8202	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8343	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8344	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8345	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8346	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8405	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8408	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8409	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8413	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8414	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8415	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8418	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8508	F1G1C103A116	C 0.010UF, K, 16V	1	
	C8510	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8531	F1G1H220A731	C 22UF, 50V	1	
	C8532	F2G1C470A022	E 47UF, 16V	1	
	C8533	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8535	F1G1C103A116	C 0.010UF, K, 16V	1	
	C8544	F1J0G2260001	C 0.001UF, 6.3V	1	
	C8580	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8581	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8582	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9033	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9034	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9035	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9036	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9037	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9038	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9040	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9044	F1J1A475A039	C 4.7UF, K, 10V	1	
	C9045	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9046	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9047	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9048	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9052	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9055	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9061	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9062	F1J1A475A039	C 4.7UF, K, 10V	1	
	C9063	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9064	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9066	F1H1E104A129	C 0.1UF, 25V	1	
	C9067	F1K0J226A008	C 22UF, K, 6.3V	1	
	C9068	F1K0J226A008	C 22UF, K, 6.3V	1	
	C9069	F1G1H222A730	C 2200UF, 50V	1	
	C9071	F1H1E104A129	C 0.1UF, 25V	1	
	C9072	F1K0J226A008	C 22UF, K, 6.3V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9073	F1K0J226A008	C 22UF, K, 6.3V	1	
	C9074	F1G1H222A730	C 2200UF, 50V	1	
	C9076	F1G1C153A116	C 0.015UF, K, 16V	1	
	C9077	F1K1E106A136	C 10UF, Z, 25V	1	
	C9078	F1K1E106A136	C 10UF, Z, 25V	1	
	C9079	F1G1H220A731	C 22UF, 50V	1	
	C9080	F1G1H201A731	C 200 UF, K, 50V	1	
	C9081	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9082	F1H1E104A129	C 0.1UF, 25V	1	
	C9083	F1K0J226A008	C 22UF, K, 6.3V	1	
	C9084	F1K0J226A008	C 22UF, K, 6.3V	1	
	C9085	F1G1H222A730	C 2200UF, 50V	1	
	C9087	F1G1A563A053	C 0.56UF, 10V	1	
	C9088	F1K1E106A136	C 10UF, Z, 25V	1	
	C9089	F1K1E106A136	C 10UF, Z, 25V	1	
	C9091	F1G1H201A731	C 200 UF, K, 50V	1	
	C9100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9111	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9112	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9113	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9115	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9123	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9124	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9134	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9135	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9136	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9138	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9139	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9140	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9141	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9142	F1H1A1050032	C 10UF, 50V	1	
	C9143	F1H1A1050032	C 10UF, 50V	1	
	C9144	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9145	F1H1A1050032	C 10UF, 50V	1	
	C9146	F1H1A1050032	C 10UF, 50V	1	
	C9147	F1H1A1050032	C 10UF, 50V	1	
	C9148	F1H1A1050032	C 10UF, 50V	1	
	C9149	F1H1A1050032	C 10UF, 50V	1	
	C9150	F1H1A1050032	C 10UF, 50V	1	
	C9151	F1H1A1050032	C 10UF, 50V	1	
	C9152	F1H1A1050032	C 10UF, 50V	1	
	C9153	F1H1A1050032	C 10UF, 50V	1	
	C9154	F1H1A1050032	C 10UF, 50V	1	
	C9155	F1H1A1050032	C 10UF, 50V	1	
	C9156	F1H1A1050032	C 10UF, 50V	1	
	C9157	F1H1A1050032	C 10UF, 50V	1	
	C9158	F1H1A1050032	C 10UF, 50V	1	
	C9159	F1H1A1050032	C 10UF, 50V	1	
	C9160	F1H1A1050032	C 10UF, 50V	1	
	C9161	F1H1A1050032	C 10UF, 50V	1	
	C9162	F1H1A1050032	C 10UF, 50V	1	
	C9163	F1H1A1050032	C 10UF, 50V	1	
	C9164	F1H1A1050032	C 10UF, 50V	1	
	C9165	F1H1A1050032	C 10UF, 50V	1	
	C9166	F1H1A1050032	C 10UF, 50V	1	
	C9167	F1H1A1050032	C 10UF, 50V	1	
	C9168	F1H1A1050032	C 10UF, 50V	1	
	C9169	F1H1A1050032	C 10UF, 50V	1	
	C9300	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9303	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9305	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9306	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9310	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9311	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9312	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9313	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9314	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9468	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9469	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9536	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9537	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9538	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9539	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9540	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9541	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9542	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9543	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9544	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9545	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9546	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9548	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9549	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9550	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9556	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9557	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9700	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9701	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9702	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9703	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9704	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9706	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9709	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9713	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9714	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9715	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9716	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9823	F1K1E106A136	C 10UF, Z, 25V	1	
	C9825	F1G1H101A731	C 100PF, K, 50V	1	
	C9832	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9837	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9840	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9844	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9845	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9846	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9858	F1K1E106A136	C 10UF, Z, 25V	1	
	C9859	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9863	F1G1E472A123	C 4200UF, Z, 25V	1	
	C9869	F1K1E106A136	C 10UF, Z, 25V	1	
	C9872	F1K1E106A136	C 10UF, Z, 25V	1	
	C9874	F1G1H101A731	C 100PF, K, 50V	1	
	C9882	F1G1H201A731	C 200 UF, K, 50V	1	
	C9889	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9899	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9900	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9901	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9902	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9903	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9904	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9905	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9906	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9907	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9908	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9909	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9910	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9911	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9912	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9913	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9914	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9915	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9916	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9917	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9918	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9920	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9921	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9922	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9923	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9924	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9925	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9926	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9949	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9950	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9952	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9953	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9954	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9956	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9957	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9958	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9960	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9961	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9962	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9965	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9966	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9967	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9968	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9970	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9971	F1G1H150A731	C 15UF, 50V	1	
	C9972	F1G1H180A731	C 18UF, 50V	1	
	C9973	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9976	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9977	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9980	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9984	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9985	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9986	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9987	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9988	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9989	ECGR10GG680ER	C 68UF, J, 4V	1	
	C9990	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9991	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9992	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9993	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9994	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9995	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9996	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9997	F1G1C104A116	C 0.10UF, K, 16V	1	
	CN0100	K1KA11AA0715	11P CONNECTOR	1	
	CN0101	K1KA20AA0009	20P CONNECTOR	1	
	D1107	MA3X704A0L	ZENER DIODE	1	
	D1112	MA2J72800L	ZENER DIODE	1	
	D2014	MA2J11100L	DIODE	1	
	D2017	MA2J11100L	DIODE	1	
	D2512	MAZ80560ML	ZENER DIODE	1	
	D2520	B3AGB0000057	LED	1	
	D2524	MAZ80560ML	ZENER DIODE	1	
	D2530	MAZ80560ML	ZENER DIODE	1	
	D2801	B0JCME000037	DIODE	1	
	D2802	B0BC4R700007	ZENER DIODE	1	
	D2803	B0BC4R700007	ZENER DIODE	1	
	D2805	MA2J11100L	DIODE	1	
	D2806	MA2J11100L	DIODE	1	
	D2809	MAZ81100ML	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D2810	MA2J11100L	DIODE	1	
	D2811	MAZ80330LL	ZENER DIODE	1	
	D2870	B0JCME000037	DIODE	1	
	D2871	MA8120M	ZENER DIODE	1	
	D3013	MAZ81400ML	ZENER DIODE	1	
	D3014	MAZ81400ML	ZENER DIODE	1	
	D3015	K7AAAY000003	PHOTO LINK	1	
	D3048	MA3X704A0L	ZENER DIODE	1	
	D3054	EZJP0V080GA	VARISTOR	1	
	D3201	EZJP0V080GA	VARISTOR	1	
	D3339	MA3X704A0L	ZENER DIODE	1	
	D4503	EZAEG2A50AX	DIODE	1	
	D4505	EZAEG2A50AX	DIODE	1	
	D4507	EZAEG2A50AX	DIODE	1	
	D4509	EZAEG2A50AX	DIODE	1	
	D4511	EZAEG2A50AX	DIODE	1	
	D4512	EZAEG2A50AX	DIODE	1	
	D4513	B0BC5R6A0275	DIODE	1	
	D4516	EZAEG2A50AX	DIODE	1	
	D4517	EZAEG2A50AX	DIODE	1	
	D4518	EZAEG2A50AX	DIODE	1	
	D4520	EZAEG2A50AX	DIODE	1	
	D4521	EZAEG2A50AX	DIODE	1	
	D4523	EZAEG2A50AX	DIODE	1	
	D4525	MA2J11100L	DIODE	1	
	D4526	MA2J11100L	DIODE	1	
	D4541	MA2J11100L	DIODE	1	
	D4542	MA2J11100L	DIODE	1	
	D4573	EZAEG2A50AX	DIODE	1	
	D4574	EZAEG2A50AX	DIODE	1	
	D4575	MA2J11100L	DIODE	1	
	D4576	B0HCMM000014	DIODE	1	
	D4577	B0HCMM000014	DIODE	1	
	D4583	B0HCMM000014	DIODE	1	
	D4587	EZAEG2A50AX	DIODE	1	
	D4588	EZAEG2A50AX	DIODE	1	
	D4589	EZAEG2A50AX	DIODE	1	
	D4590	EZAEG2A50AX	DIODE	1	
	D4591	EZAEG2A50AX	DIODE	1	
	D4592	EZAEG2A50AX	DIODE	1	
	D4593	EZAEG2A50AX	DIODE	1	
	D4594	EZAEG2A50AX	DIODE	1	
	D4595	EZAEG2A50AX	DIODE	1	
	D4596	EZAEG2A50AX	DIODE	1	
	D4597	EZAEG2A50AX	DIODE	1	
	D4598	EZAEG2A50AX	DIODE	1	
	D4599	EZAEG2A50AX	DIODE	1	
	D4600	EZAEG2A50AX	DIODE	1	
	D4601	EZAEG2A50AX	DIODE	1	
	D4602	EZAEG2A50AX	DIODE	1	
	D4611	B0BC5R6A0275	DIODE	1	
	D4615	MA2J11100L	DIODE	1	
	D4617	B0BC5R6A0275	DIODE	1	
	D5481	B0HCMM000014	DIODE	1	
	D5482	B0HCMM000014	DIODE	1	
	D5483	MA3X78900L	ZENER DIODE	1	
	D5485	B0BC03900015	ZENER DIODE	1	
	D5600	B0BC4R700007	ZENER DIODE	1	
	D5603	B0BC6R600005	ZENER DIODE	1	
	D5607	B0BC4R700007	ZENER DIODE	1	
	D5608	B0BC4R700007	ZENER DIODE	1	
	D5612	MAZ80560LL	ZENER DIODE	1	
	D5620	B0BC01100001	ZENER DIODE	1	
	D5621	MA3X152D0L	DIODE	1	
	D5622	MA3X152D0L	DIODE	1	
	D7800	B3AEB0000107	LED	1	
	D9000	B0JCCB000008	DIODE	1	
	D9110	B0JCGD000002	DIODE	1	
	D9800	B0JCPE000004	DIODE	1	
	FL3001	J0HABB000003	LC FILTER	1	
	FL3002	J0HABB000003	LC FILTER	1	
	FL3003	J0HABB000004	LC FILTER	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	FL3004	J0HABB000004	LC FILTER	1	
	FL3005	J0HABB000004	LC FILTER	1	
	FL9803	F1J1E104A148	C 0.10UF, Z, 25V	1	
	FL9805	F1J1E104A148	C 0.10UF, Z, 25V	1	
	FL9806	F1J1E104A148	C 0.10UF, Z, 25V	1	
	GK1	K1KA02BA0061	2P CONNECTOR	1	
	GL02	K1KA02B00294	2P CONNECTOR	1	
	IC1000	C1ZBZ0003775	IC	1	
	IC1100	MNZSFH9GP83	IC	1	
	IC1101	TVRQ392	IC	1	PAVCCZ
	IC2008	C0DBGYY00578	IC	1	
	IC2301	C1AB00002875	IC	1	
	IC2801	C0DBAYY00462	IC	1	
	IC2802	C0DBAYY00462	IC	1	
	IC2960	C0DBGHF00001	IC	1	
	IC3001	C1AB00002855	IC	1	
	IC3003	C0DBGYY00281	IC	1	
	IC4510	C1AB00003045	IC	1	
	IC4511	C0DBGYY00578	IC	1	
	IC4512	C0CBCAG00039	IC	1	
	IC4513	C0DBGYY00618	IC	1	
	IC5401	C0CBZZE00001	IC	1	
	IC5470	C0EBM0000026	IC	1	
	IC5480	C1ZBZ0003972	IC	1	
	IC5600	C0DBAYY00480	IC	1	
	IC5601	C0DBAYY00480	IC	1	
	IC8001	MN2WS0053	IC	1	PAVCCZ
	IC8002	C3ABTG000007	IC	1	
	IC8003	C3ABTG000007	IC	1	
	IC8004	C0ZBZ0001567	IC	1	
	IC8502	TVRQ423	IC	1	PAVCCZ
	IC8580	TVRQ370	IC	1	PAVCCZ
	IC9001	TVRQ456	IC	1	PAVCCZ
	IC9003	MNZSFH8KF3	IC	1	
	IC9004	C1ZBZ0003983	IC	1	
	IC9300	MN84528	IC	1	
	IC9303	TVRQ383	IC	1	PAVCCZ
	IC9500	C1ZBZ0003760	IC	1	
	IC9805	C0DBAYY00477	IC	1	
	IC9806	C0DBAYY00478	IC	1	
	IC9807	C0DBAYY00477	IC	1	
	IC9808	C0CBCAC00365	IC	1	
	IC9902	C3ABRY000040	IC	1	
	IC9903	C3ABRY000040	IC	1	
	JK3001	K1FY115B0021	CONNECTOR	1	
	JK3002A	K1FY121A0008	CONNECTOR	1	PAVCCZ
	JK3003A	K1FY121A0008	CONNECTOR	1	PAVCCZ
	JK3100A	K2HA7YYA0004	TERMINAL	1	PAVCCZ
	JK3107A	K4AK17B00004	TERMINAL	1	PAVCCZ
	JK4500	K1FY119D0006	CONNECTOR	1	
	JK4501	K1FY119D0006	CONNECTOR	1	
	JK4502	K1FY119E0005	CONNECTOR	1	
	JK8302	K1NA09E00080	9P CONNECTOR	1	
	K1	K1KA11B00092	11P CONNECTOR	1	
	L1100	J0JYC0000068	CHIP INDUCTOR	1	
	L2001	G1C150KA0038	INDUCTION COIL	1	
	L2010	G1C220MA0291	INDUCTION COIL	1	
	L2012	G1C220MA0291	INDUCTION COIL	1	
	L2014	G1C220MA0291	INDUCTION COIL	1	
	L2016	G1C220MA0291	INDUCTION COIL	1	
	L2018	J0JHC0000042	CHIP INDUCTOR	1	
	L2023	G1C3R0ZA0156	INDUCTION COIL	1	
	L2032	J0JYC0000068	CHIP INDUCTOR	1	
	L2803	G1C330M00027	INDUCTION COIL	1	
	L2870	G1C101M00029	INDUCTION COIL	1	
	L2901	J0JCC0000278	CHIP INDUCTOR	1	
	L2902	J0JCC0000269	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L2904	J0JCC0000269	CHIP INDUCTOR	1	
	L3002	J0JCC0000287	CHIP INDUCTOR	1	
	L3003	J0JCC0000287	CHIP INDUCTOR	1	
	L3004	J0JCC0000287	CHIP INDUCTOR	1	
	L3005	J0JCC0000287	CHIP INDUCTOR	1	
	L3006	J0JCC0000287	CHIP INDUCTOR	1	
	L3007	J0JCC0000287	CHIP INDUCTOR	1	
	L3008	J0JCC0000287	CHIP INDUCTOR	1	
	L3009	J0JCC0000287	CHIP INDUCTOR	1	
	L3010	J0JCC0000287	CHIP INDUCTOR	1	
	L3011	J0JCC0000287	CHIP INDUCTOR	1	
	L3014	J0JCC0000287	CHIP INDUCTOR	1	
	L3015	J0JCC0000287	CHIP INDUCTOR	1	
	L3017	J0JCC0000287	CHIP INDUCTOR	1	
	L3018	J0JCC0000287	CHIP INDUCTOR	1	
	L3026	J0JCC0000287	CHIP INDUCTOR	1	
	L3027	J0JCC0000287	CHIP INDUCTOR	1	
	L3028	J0JCC0000287	CHIP INDUCTOR	1	
	L3029	J0JCC0000287	CHIP INDUCTOR	1	
	L3030	J0JCC0000287	CHIP INDUCTOR	1	
	L3034	J0JCC0000364	CHIP INDUCTOR	1	
	L3035	J0JCC0000364	CHIP INDUCTOR	1	
	L4502	J0JYC0000068	CHIP INDUCTOR	1	
	L4503	J0JYC0000068	CHIP INDUCTOR	1	
	L4504	J0JYC0000068	CHIP INDUCTOR	1	
	L4505	J0JYC0000068	CHIP INDUCTOR	1	
	L4506	J0JYC0000068	CHIP INDUCTOR	1	
	L4507	J0JYC0000068	CHIP INDUCTOR	1	
	L4511	J0JYC0000068	CHIP INDUCTOR	1	
	L4512	J0JCC0000059	CHIP INDUCTOR	1	
	L4513	J0JCC0000059	CHIP INDUCTOR	1	
	L4514	J0JYC0000068	CHIP INDUCTOR	1	
	L4515	J0JYC0000068	CHIP INDUCTOR	1	
	L4516	J0JYC0000068	CHIP INDUCTOR	1	
	L4517	J0JYC0000068	CHIP INDUCTOR	1	
	L4518	J0JYC0000068	CHIP INDUCTOR	1	
	L4519	J0JYC0000068	CHIP INDUCTOR	1	
	L4521	J0JYC0000068	CHIP INDUCTOR	1	
	L4522	J0JYC0000068	CHIP INDUCTOR	1	
	L4523	J0JYC0000068	CHIP INDUCTOR	1	
	L5480	J0JYC0000068	CHIP INDUCTOR	1	
	L5481	G1C100MA0072	INDUCTION COIL	1	
	L5544	G1C470MA0291	INDUCTION COIL	1	
	L5600	G1C2R2Z00007	INDUCTION COIL	1	
	L5601	G1C3R3Z00004	INDUCTION COIL	1	
	L5602	G1C4R7Z00014	INDUCTION COIL	1	
	L5603	G1C6R8Z00008	INDUCTION COIL	1	
	L5604	G1C100MA0203	INDUCTION COIL	1	
	L5605	J0JHC0000075	CHIP INDUCTOR	1	
	L5606	G1C100MA0203	INDUCTION COIL	1	
	L8001	J0JHC0000045	CHIP INDUCTOR	1	
	L8002	J0JHC0000045	CHIP INDUCTOR	1	
	L8003	J0JHC0000045	CHIP INDUCTOR	1	
	L8004	J0JHC0000045	CHIP INDUCTOR	1	
	L8005	J0JHC0000045	CHIP INDUCTOR	1	
	L8007	J0JHC0000045	CHIP INDUCTOR	1	
	L8008	J0JHC0000045	CHIP INDUCTOR	1	
	L8009	J0JHC0000045	CHIP INDUCTOR	1	
	L8010	J0JHC0000045	CHIP INDUCTOR	1	
	L8011	J0JHC0000045	CHIP INDUCTOR	1	
	L8012	J0JHC0000045	CHIP INDUCTOR	1	
	L8013	J0JHC0000045	CHIP INDUCTOR	1	
	L8501	J0JHC0000045	CHIP INDUCTOR	1	
	L8580	J0JHC0000075	CHIP INDUCTOR	1	
	L9001	G1C3R3Z00004	INDUCTION COIL	1	
	L9002	G1C6R8Z00008	INDUCTION COIL	1	
	L9700	J0JHC0000117	CHIP INDUCTOR	1	
	L9701	J0JHC0000117	CHIP INDUCTOR	1	
	L9802	G1C6R8Z00010	INDUCTION COIL	1	
	L9900	J0JHC0000117	CHIP INDUCTOR	1	
	L9901	J0JHC0000117	CHIP INDUCTOR	1	
	L9903	J0JHC0000117	CHIP INDUCTOR	1	
	L9904	J0JHC0000117	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	PA5600	K5H5022A0031	FUSE	1	
	PC2511	B3JB00000046	IC	1	
▲	PCB	TXNGK1EQUE	CIRCUIT BOARD GK	1	(RTL) PAVCCZ
▲	PCB	A-PR42G10	CIRCUIT BOARD A	1	(RTL) PAVCCZ
▲	PCB	TXN/S1EQUE	CIRCUIT BOARD S	1	(RTL) PAVCCZ
▲	PCB	TXN/K1EQR	CIRCUIT BOARD K	1	(RTL) PAVCCZ
▲	PCB	TXNGL1EBUE	CIRCUIT BOARD GL	1	(RTL) PAVCCZ
Q0900	B1CBHD000002	FET		1	
Q0901	B1CBHD000002	FET		1	
Q2001	B1ABCF000231	TRANSISTOR		1	
Q2022	B1ADCE000022	TRANSISTOR		1	
Q2063	2SD0601ASL	TRANSISTOR		1	
Q2064	2SD0601ASL	TRANSISTOR		1	
Q2065	2SB0709ASL	TRANSISTOR		1	
Q2510	2SD0601ARL	TRANSISTOR		1	
Q2511	2SD0601ARL	TRANSISTOR		1	
Q2513	2SD0601ARL	TRANSISTOR		1	
Q2850	2SB0709ARL	TRANSISTOR		1	
Q2851	2SD0601ARL	TRANSISTOR		1	
Q3000	B1ABCF000231	TRANSISTOR		1	
Q3001	B1ABCF000231	TRANSISTOR		1	
Q3002	B1ABCF000231	TRANSISTOR		1	
Q3003	B1ABCF000231	TRANSISTOR		1	
Q3004	B1ABCF000231	TRANSISTOR		1	
Q3005	B1ABCF000231	TRANSISTOR		1	
Q4500	B1ABCF000231	TRANSISTOR		1	
Q4501	B1ABCF000231	TRANSISTOR		1	
Q4514	2SB0709ASL	TRANSISTOR		1	
Q4515	2SB0709ASL	TRANSISTOR		1	
Q4516	2SB0709ASL	TRANSISTOR		1	
Q4517	2SB0709ASL	TRANSISTOR		1	
Q4519	2SB0709ASL	TRANSISTOR		1	
Q4520	B1ABCF000231	TRANSISTOR		1	
Q4533	B1ABCF000231	TRANSISTOR		1	
Q4534	B1ABCF000231	TRANSISTOR		1	
Q4535	B1ABCF000231	TRANSISTOR		1	
Q5480	B1ADCE000022	TRANSISTOR		1	
Q5600	B1MBDDA00003	FET		1	
Q5601	B1MBDDA00003	FET		1	
Q5602	B1MBDDA00003	FET		1	
Q5603	B1MBDDA00003	FET		1	
Q5606	2SD0601ARL	TRANSISTOR		1	
Q5607	2SD0601ARL	TRANSISTOR		1	
Q5608	2SB0709ARL	TRANSISTOR		1	
Q9000	B1ABCF000231	TRANSISTOR		1	
Q9001	B1ABCF000231	TRANSISTOR		1	
Q9002	B1ABCF000231	TRANSISTOR		1	
Q9003	B1ABCF000231	TRANSISTOR		1	
Q9004	B1ABCF000231	TRANSISTOR		1	
Q9301	2SD0601ARL	TRANSISTOR		1	
Q9302	2SD0601ARL	TRANSISTOR		1	
Q9807	2SD0601ARL	TRANSISTOR		1	
R0180	ERJ2GEJ101	M 100 OHM, J, 0.063W		1	
R606	ERJ2GEJ223	M 22KOHM, J, 0.063W		1	
R607	ERJ2GEJ473	M 47KOHM, J, 0.063W		1	
R0900	ERJ2GEJ680	M 68 OHM, J, 0.063W		1	
R0901	EXB28V680JX	RESISTOR ARRAY		1	
R0902	ERJ2GEJ102X	M 1K OHM J 1/4W		1	
R0905	ERJ2GEJ103	M 10KOHM, J, 0.063W		1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R0906	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R0907	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R0909	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0910	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0911	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0912	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0913	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0914	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0915	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R0916	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R0917	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0918	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0919	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0920	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0921	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0922	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0923	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R0924	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R0925	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0926	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0929	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0930	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0933	D0YAR0000007	M 0 OHM 1/4W	1	
	R0934	D0YAR0000007	M 0 OHM 1/4W	1	
	R0935	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0936	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0945	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0946	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0947	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R0948	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R0949	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R0950	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R0951	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R0952	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R0953	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R0954	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R0955	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R0956	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R0957	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R0958	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R0959	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R0960	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R0961	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0962	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1010	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R1146	D0YAR0000007	M 0 OHM 1/4W	1	
	R1153	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R1163	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R1173	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R1179	D0YAR0000007	M 0 OHM 1/4W	1	
	R1181	D0YAR0000007	M 0 OHM 1/4W	1	
	R1182	ERJ2GED273X	M 27KOHM ,J,0.063W	1	
	R1197	D0YAR0000007	M 0 OHM 1/4W	1	
	R1203	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1209	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1221	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R1224	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1225	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1236	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1243	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1400	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1401	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1402	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1403	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1404	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1405	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1406	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1407	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1410	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1411	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1413	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2002	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2003	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2006	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2007	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2008	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2015	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2016	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2017	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2018	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2019	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2020	D1BB2001A055	M 2KOHM, 1/10W	1	
	R2023	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2032	D0YAR0000007	M 0 OHM 1/4W	1	
	R2047	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2048	D1BB2802A055	M 28KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2050	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2051	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2063	D0YAR0000007	M 0 OHM 1/4W	1	
	R2064	D0YAR0000007	M 0 OHM 1/4W	1	
	R2092	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2093	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2110	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2111	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2114	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2115	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2118	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2119	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2120	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2121	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R2122	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2123	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R2124	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2125	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R2127	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R2129	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R2132	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2137	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R2141	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2142	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2172	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2190	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R2316	EXB28V220J	RESISTOR ARRAY	1	
	R2325	D0YAR0000007	M 0 OHM 1/4W	1	
	R2516	ERJ3GEYJ223	M 22KOHM, J,1/16W	1	
	R2517	ERJ3GEYJ470	M 47 OHM, J,1/16W	1	
	R2520	ERJ3GEYJ224	M 220KOHM, J,1/ 16W	1	
	R2524	ERJ3GEYJ223	M 22KOHM, J,1/16W	1	
	R2525	D1BB7500A055	M 750 OHM, 1/10W	1	
	R2530	D0GB473JA057	M 47KOHM, J,1/16W	1	
	R2531	D1BB2700A055	M 270 OHM, 1/10W	1	
	R2542	D0GB473JA057	M 47KOHM, J,1/16W	1	
	R2556	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R2557	ERJ3GEYJ223	M 22KOHM, J,1/16W	1	
	R2756	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2757	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2801	ERJ2GEJ390	M 39 OHM, J,0.063W	1	
	R2802	ERJ2GEJ203X	M 20KOHM, J,0.063W	1	
	R2803	D1BB1001A055	M 1KOHM, 1/16W	1	
	R2804	D1BB43R2A055	M 43.2 OHM, 1/ 10W	1	PAVCCZ
	R2805	D1BB5111A055	M 5.11KOHM, 1/10W	1	PAVCCZ
	R2806	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R2810	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R2811	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2814	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R2815	ERJ2GEJ471	M 470 OHM, J, 0.063W	1	
	R2816	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R2817	D0YAR0000007	M 0 OHM 1/4W	1	
	R2818	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2819	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R2832	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R2850	ERJ3EKF75R0	M 0.75HM, 1/16W	1	
	R2851	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2853	D0GB102JA041	M 1KOHM, J, 1/16W	1	
	R2854	D0GB104JA041	M 100KOHM J 1/ 16W	1	
	R2855	D0GB102JA041	M 1KOHM, J, 1/16W	1	
	R2870	ERJ2GEJ390	M 39 OHM, J, 0.063W	1	
	R2871	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2872	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R2873	D0YAR0000007	M 0 OHM 1/4W	1	
	R2874	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2875	ERJ2GEJ203X	M 20KOHM, J, 0.063W	1	
	R2905	D0YAR0000007	M 0 OHM 1/4W	1	
	R2909	D0YAR0000007	M 0 OHM 1/4W	1	
	R2915	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2916	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R2930	ERJ2GEJ153	M 15KOHM , J, 0.063W	1	
	R2941	D0YAR0000007	M 0 OHM 1/4W	1	
	R2942	D0YAR0000007	M 0 OHM 1/4W	1	
	R2960	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R3000	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R3001	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R3002	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R3003	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R3004	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R3005	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R3006	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3007	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3008	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3009	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3010	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3011	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3012	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3013	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3014	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R3019	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3021	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3024	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3025	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3028	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3029	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3033	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3034	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3037	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3038	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3041	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3042	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3043	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3045	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3047	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3048	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3049	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3050	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3051	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3052	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3072	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3073	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3074	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3075	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3076	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3077	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3079	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3081	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3082	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3083	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3084	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3085	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3086	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3087	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3089	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3091	ERJ2RKF2152	M 21.5K OHM, J, 2W	1	PAVCCZ
	R3092	ERJ2RKF2152	M 21.5K OHM, J, 2W	1	PAVCCZ
	R3094	ERJ2RKF1302	M 13K OHM, J, 2W	1	
	R3097	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3098	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3100	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3102	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3104	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3106	ERJ2GED273X	M 27KOHM , J, 0.063W	1	
	R3108	ERJ2GED273X	M 27KOHM , J, 0.063W	1	
	R3112	D0YAR0000007	M 0 OHM 1/4W	1	
	R3113	D0YAR0000007	M 0 OHM 1/4W	1	
	R3115	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3116	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3117	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3118	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3119	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3120	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3121	ERJ6RED750	M 75 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3123	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3128	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3132	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R3133	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R3134	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R3135	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3136	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3137	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3138	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3139	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3140	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3143	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3146	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3150	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3153	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3167	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3169	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3172	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3174	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3182	ERJ2RKF1302	M 13K OHM, J, 2W	1	
	R3186	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3187	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3188	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3189	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3190	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3191	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3193	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3198	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3204	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3205	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3206	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R3207	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R3212	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3213	D1BD1500A044	M 150 OHM, 1/10W	1	
	R3223	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3225	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3226	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3227	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3230	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3232	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3234	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3236	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3237	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3240	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3256	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3308	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3309	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3770	D1BD1432A044	M14.3KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3771	D1BD6651A044	M6.65KOHM, 1/10W	1	
	R3772	D1BD1741A044	M1.74KOHM, 1/10W	1	
	R3775	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R4277	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4284	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4285	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4286	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4294	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4300	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4305	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4306	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4500	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4501	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4502	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4503	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4504	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4505	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4506	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4507	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4524	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4525	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4528	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4529	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4530	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4531	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4532	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4533	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4534	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4538	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4539	D0YAR0000007	M 0 OHM 1/4W	1	
	R4540	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4541	D0YAR0000007	M 0 OHM 1/4W	1	
	R4542	D0YAR0000007	M 0 OHM 1/4W	1	
	R4543	D0YAR0000007	M 0 OHM 1/4W	1	
	R4552	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4587	D1BB60400001	M 604 OHM, 1/10W	1	
	R4588	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4589	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4592	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4593	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R4596	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4597	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4598	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4601	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4604	D0YAR0000007	M 0 OHM 1/4W	1	
	R4605	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R4607	D0YAR0000007	M 0 OHM 1/4W	1	
	R4608	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4609	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
	R4613	D0YAR0000007	M 0 OHM 1/4W	1	
	R4614	D0YAR0000007	M 0 OHM 1/4W	1	
	R4615	D0YAR0000007	M 0 OHM 1/4W	1	
	R4616	D0YAR0000007	M 0 OHM 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4620	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4622	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4623	D0YAR0000007	M 0 OHM 1/4W	1	
	R4624	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4626	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4627	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4631	D1BB4990A055	M 499 OHM, 1/10W	1	
	R4634	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4635	EXB28V680JX	RESISTOR ARRAY	1	
	R4636	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4637	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4638	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4639	EXB28V680JX	RESISTOR ARRAY	1	
	R4640	EXB28V680JX	RESISTOR ARRAY	1	
	R4641	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4642	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4645	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4646	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4648	EXB28V680JX	RESISTOR ARRAY	1	
	R4649	EXB28V680JX	RESISTOR ARRAY	1	
	R4650	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4651	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4652	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4656	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R4664	D1BB60400001	M 604 OHM, 1/10W	1	
	R4665	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4666	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4672	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4674	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4677	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4678	EXB28V680JX	RESISTOR ARRAY	1	
	R4679	EXB28V680JX	RESISTOR ARRAY	1	
	R4698	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4699	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4700	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4707	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4728	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4729	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4732	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4733	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4734	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4735	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4736	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4738	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4739	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4740	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4742	D0YAR0000007	M 0 OHM 1/4W	1	
	R4743	D0YAR0000007	M 0 OHM 1/4W	1	
	R4799	EXB28V680JX	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5470	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5471	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5472	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5473	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5474	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5475	ERJ2GEJ123	M 12KOHM, J, 0.063W	1	
	R5482	ERJ6GEYJ150V	M 15 OHM, J, 1/10W	1	
	R5484	D1BB3902A055	M 39KOHM, 1/10W	1	
	R5485	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5486	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5488	D0YAR0000007	M 0 OHM 1/4W	1	
	R5489	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R5490	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5491	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5492	ERJ2GEJ105	M 1MOHM, J, 0.063W	1	
	R5493	ERJ2GEJ203X	M 20KOHM, J, 0.063W	1	
	R5494	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5496	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5541	D1BB1003A055	M 100KOHM, 1/10W	1	
	R5542	D1BB3401A055	M 3.4KOHM, 1/10W	1	
	R5543	ERJ6GEYJ153V	M 15KOHM, J, 1/10W	1	
	R5581	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5582	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5600	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R5604	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5605	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R5610	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R5611	D1BB1202A055	M 12KOHM, 1/10W	1	
	R5612	D1BB2002A055	M 20KOHM, 1/10W	1	
	R5613	ERJ2GEJ5R6X	M 5.6 OHM, J, 0.063W	1	
	R5622	ERJ2GEJ5R6X	M 5.6 OHM, J, 0.063W	1	
	R5629	D1BB2101A055	M 2.1KOHM, 1/10W	1	
	R5630	D1BB3301A055	M 3.3KOHM, 1/16W	1	
	R5631	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R5632	D1BB4021A055	M 4.2KOHM, 1/16W	1	
	R5633	D1BB1202A055	M 12KOHM, 1/10W	1	
	R5634	D1BB1602A055	M 16KOHM, 1/10W	1	
	R5635	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R5636	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R5646	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5647	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5657	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5658	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5659	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5668	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5669	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R5670	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5671	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5672	ERJ6GEYJ221V	M 220 OHM, J, 1/ 10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5674	ERJ6GEYJ471	M 470 OHM, J,1/ 10W	1	
	R5676	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5678	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R7800	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8004	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8005	D1BB1002A055	M 10KOHM, 1/10W	1	
	R8006	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8007	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8026	D0YAR0000007	M 0 OHM 1/4W	1	
	R8027	D0YAR0000007	M 0 OHM 1/4W	1	
	R8030	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8031	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R8032	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R8056	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8057	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8058	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8059	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8060	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8061	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8062	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8063	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8064	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8065	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8066	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8067	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8068	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8069	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8070	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8071	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8072	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8073	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8074	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8075	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8076	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8077	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8078	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8081	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8082	ERJ2RKF75R0	M 75 OHM, , 0.063W	1	
	R8083	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R8086	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8088	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8090	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8091	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8093	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8095	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8096	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8097	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8100	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8101	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8109	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8260	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8272	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8412	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8471	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8475	EXB28V103JX	RESISTOR ARRAY	1	
	R8494	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8496	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8501	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8502	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R8503	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R8504	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R8506	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R8508	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8510	D1BB1600A055	M 160 OHM, 1/10W	1	
	R8511	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8514	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8515	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8516	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8517	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8520	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8530	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R8531	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R8558	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8575	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8576	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8577	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8578	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8579	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8580	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8581	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8582	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8585	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8608	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8609	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8610	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8612	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8613	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8614	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8615	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8616	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8617	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8618	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8619	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8620	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8628	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8629	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8630	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8637	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8638	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8639	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8640	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8641	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8642	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8644	D0YAR0000007	M 0 OHM 1/4W	1	
	R8645	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8646	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8647	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8651	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8654	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8658	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8660	D0YAR0000007	M 0 OHM 1/4W	1	
	R8661	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8663	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8665	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R8666	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8667	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8672	EXB2HV680J	RESISTOR ARRAY	1	
	R8673	EXB2HV680J	RESISTOR ARRAY	1	
	R8674	EXB2HV103JV	RESISTOR ARRAY	1	
	R8676	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8677	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8683	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8688	EXB2HV680J	RESISTOR ARRAY	1	
	R8689	EXB2HV680J	RESISTOR ARRAY	1	
	R8690	EXB2HV680J	RESISTOR ARRAY	1	
	R8691	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8692	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8697	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R8703	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8715	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8716	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8718	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8719	EXB28V103JX	RESISTOR ARRAY	1	
	R8722	EXB28V103JX	RESISTOR ARRAY	1	
	R8723	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8724	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8726	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8729	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8730	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8732	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8733	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8734	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8735	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8736	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8738	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8739	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8740	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
	R8742	D1HG1218A002	NETWORK RESISTER	1	
	R8745	D1HG1218A002	NETWORK RESISTER	1	
	R8746	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8747	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8750	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8751	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8765	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8767	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8768	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8802	D0YAR0000007	M 0 OHM 1/4W	1	
	R8803	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8804	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8805	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8806	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8807	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8808	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8860	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8898	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8959	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8960	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8963	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9070	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9071	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R9072	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9073	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9077	D1BB1302A055	M 13KOHM, 1/10W	1	
	R9078	D1BB4302A055	M 43KOHM, 1/10W	1	
	R9079	D1BB2702A055	M 27KOHM, 1/10W	1	
	R9080	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9081	D1BB4702A055	M 47KOHM, 1/10W	1	
	R9083	D0YAR0000007	M 0 OHM 1/4W	1	
	R9084	D0YAR0000007	M 0 OHM 1/4W	1	
	R9085	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9086	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9087	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9088	D1BB1802A055	M 18KOHM, 1/10W	1	
	R9089	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9091	D1BB2702A055	M 27KOHM, 1/10W	1	
	R9092	D1BB1202A055	M 12KOHM, 1/10W	1	
	R9095	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9096	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9097	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9098	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9099	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9100	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R9101	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R9102	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9103	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R9104	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9105	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9106	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9107	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R9108	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9109	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9110	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9113	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9115	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9116	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9119	EXB38V470J	RESISTOR ARRAY	1	
	R9120	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9121	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9124	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9129	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R9130	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9142	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9149	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9152	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9153	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9154	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9155	ERJ2RHD272	M 2.7KOHM, J, 2W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9164	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9166	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9187	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9188	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9189	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9202	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9203	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R9205	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R9206	ERJ2GED563X	M 56KOHM ,J,0.063W	1	
	R9207	ERJ2GEJ243	M 24KOHM, J,0.063W	1	
	R9210	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9212	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9213	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9215	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9217	D0YAR0000007	M 0 OHM 1/4W	1	
	R9221	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9223	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9225	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9226	D0YAR0000007	M 0 OHM 1/4W	1	
	R9227	D0YAR0000007	M 0 OHM 1/4W	1	
	R9228	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9229	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9234	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9235	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9236	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9237	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9238	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9239	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9240	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9241	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9242	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9243	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9245	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9246	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9249	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9250	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9369	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9370	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9371	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9385	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9391	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9398	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R9399	ERJ2RKF75R0	M 75 OHM, , 0.063W	1	
	R9401	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R9402	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9403	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9404	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9405	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9406	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9407	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9408	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9409	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9410	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9411	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9412	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9413	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9414	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9415	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9416	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9417	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9418	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9419	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9420	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9421	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9422	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9423	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9424	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9425	EXB2HV151J	RESISTOR ARRAY	1	
	R9426	EXB2HV151J	RESISTOR ARRAY	1	
	R9440	D0YAR0000007	M 0 OHM 1/4W	1	
	R9441	D0YAR0000007	M 0 OHM 1/4W	1	
	R9442	D0YAR0000007	M 0 OHM 1/4W	1	
	R9443	D0YAR0000007	M 0 OHM 1/4W	1	
	R9444	D0YAR0000007	M 0 OHM 1/4W	1	
	R9445	D0YAR0000007	M 0 OHM 1/4W	1	
	R9446	D0YAR0000007	M 0 OHM 1/4W	1	
	R9447	D0YAR0000007	M 0 OHM 1/4W	1	
	R9448	D0YAR0000007	M 0 OHM 1/4W	1	
	R9449	D0YAR0000007	M 0 OHM 1/4W	1	
	R9450	D0YAR0000007	M 0 OHM 1/4W	1	
	R9451	D0YAR0000007	M 0 OHM 1/4W	1	
	R9452	D0YAR0000007	M 0 OHM 1/4W	1	
	R9453	D0YAR0000007	M 0 OHM 1/4W	1	
	R9454	D0YAR0000007	M 0 OHM 1/4W	1	
	R9455	D0YAR0000007	M 0 OHM 1/4W	1	
	R9578	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9586	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9587	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9592	D0GA103JA015	M 10KOHM, J, 1/16W	1	
	R9594	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9598	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9604	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9608	EXB2HV470JV	RESISTOR ARRAY	1	
	R9609	EXB2HV470JV	RESISTOR ARRAY	1	
	R9610	EXB2HV470JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9611	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9616	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9618	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R9839	EXB38V101JV	RESISTOR ARRAY	1	
	R9848	EXB2HV470JV	RESISTOR ARRAY	1	
	R9849	EXB2HV470JV	RESISTOR ARRAY	1	
	R9868	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9871	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9872	D1BB1002A055	M 10KOHM, 1/10W	1	
	R9873	ERJ14YJ5R6U	M 6.2OHM, 1/4W	1	
	R9874	ERJ14YJ100H	M 10 OHM, J, 1/4W	1	
	R9893	D1BB2702A055	M 27KOHM, 1/10W	1	
	R9894	D1BB1802A055	M 18KOHM, 1/10W	1	
	R9897	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9898	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9899	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9966	ERJ2GEJ391	M 390 OHM, J, 0.063W	1	
	R9967	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9968	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9969	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9970	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9975	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9977	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9983	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9987	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9988	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9989	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9990	D0YAR0000007	M 0 OHM 1/4W	1	
	R9996	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R9997	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R9998	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R9999	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	RM2501	B3RAD0000160	REMOTE SENSOR	1	
	S1B	K1KA03BA0237	3P CONNECTOR	1	
⚠	SW2500	K0F162B00002	SWITCH	1	
	SW3759	EVQ11G05R	SWITCH	1	
	SW3760	EVQ11G05R	SWITCH	1	
	SW3761	EVQ11G05R	SWITCH	1	
	SW3762	EVQ11G05R	SWITCH	1	
	SW3763	EVQ11G05R	SWITCH	1	
⚠	TU2901	ENG37E18KF	TUNER	1	
	X1100	H0J100500035	CRYSTAL	1	
	X2010	H0J245500089	CRYSTAL	1	
	X8001	H0J270500120	CRYSTAL	1	
	X9900	H0J200500076	CRYSTAL	1	
	C10	K1MN20BA0231	20P CONNECTOR	1	
	C11	K1MY68BA0345	68P CONNECTOR	1	
	C14	K1KA02A00787	2P CONNECTOR	1	
	C20	K1MY20BA0345	20P CONNECTOR	1	
	C21	K1MY68BA0345	68P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C23	K1KA08B00270	8P CONNECTOR	1	
	C25	K1KA04BA0107	4P CONNECTOR	1	
C16002	F1L2J562A022	C 5600UF, K, 6.3V	1		
C16012	F2A2E251A183	E 250UF, 250V	1		
C16013	F2A2E251A183	E 250UF, 250V	1		
C16018	F0C2E155A252	E 0.015UF, 250V	1		
C16023	F1L2J562A022	C 5600UF, K, 6.3V	1		
C16041	F1H1H392A970	C 3900PF, K, 50V	1		
C16071	F1L2J1020001	C 1000UF, K, 6.3V	1		
C16092	F1L2J1020001	C 1000UF, K, 6.3V	1		
C16104	F1H1E470A130	C 47UF, K, 25V	1		
C16105	F1H1E470A130	C 47UF, K, 25V	1		
C16131	F1L1E4750004	C 4.7UF, 25V	1		
C16133	F1L1E4750004	C 4.7UF, 25V	1		
C16135	F1K1E105A029	C 1UF, Z, 25V	1		
C16151	F1K1E105A029	C 1UF, Z, 25V	1		
C16152	F1L1E4750004	C 4.7UF, 25V	1		
C16153	F1L1E4750004	C 4.7UF, 25V	1		
C16154	F1L1E4750004	C 4.7UF, 25V	1		
C16191	F1L1E4750004	C 4.7UF, 25V	1		
C16192	F1H1E104A129	C 0.1UF, 25V	1		
C16193	EEUFC1E470	E 47UF, 25V	1		
C16195	F1L1E4750004	C 4.7UF, 25V	1		
C16201	F0C2E405A230	E 0.040UF, 250V	1		
C16202	F0C2E405A230	E 0.040UF, 250V	1		
C16203	F0C2E405A230	E 0.040UF, 250V	1		
C16241	F2A1A101A106	E 100UF, 10V	1		
C16242	F1H1C105A008	C 1UF, K, 16V	1		
C16243	F1H1H103A970	C 0.001UF, K, 50V	1		
C16251	F1H1C105A008	C 1UF, K, 16V	1		
C16252	F1K1E105A029	C 1UF, Z, 25V	1		
C16271	EEUFC1E221	E 220UF, 25V	1		
C16280	F1K1E105A029	C 1UF, Z, 25V	1		
C16285	F1H1H104A970	C 0.1UF, K, 50V	1		
C16286	F1H1H104A970	C 0.1UF, K, 50V	1		
C16287	F1H1H104A970	C 0.1UF, K, 50V	1		
C16314	F2A2E251A183	E 250UF, 250V	1		
C16315	F1H1A1050032	C 10UF, 50V	1		
C16316	F1H1C104A143	C 0.1UF, K, 16V	1		
C16317	F1H1A1050032	C 10UF, 50V	1		
C16318	F1J1H104A835	C 0.10UF, 50V	1		
C16319	F1J1H104A835	C 0.10UF, 50V	1		
C16328	F2A2C221A195	E 2200UF, 160V	1	PAVCCZ	
C16331	F0C2E105A252	E 0.010UF, 250V	1	PAVCCZ	
C16401	F1L2J562A022	C 5600UF, K, 6.3V	1		
C16412	F2A2E251A183	E 250UF, 250V	1		
C16413	F0C2E155A252	E 0.015UF, 250V	1		
C16414	F2A2E251A183	E 250UF, 250V	1		
C16417	F2A2E251A183	E 250UF, 250V	1		
C16418	F0C2E155A252	E 0.015UF, 250V	1		
C16421	F1L2J562A022	C 5600UF, K, 6.3V	1		
C16441	F1H1H392A970	C 3900PF, K, 50V	1		
C16460	F1E2J152A002	C 1500PF, 600V	1		
C16471	F1L2J1020001	C 1000UF, K, 6.3V	1		
C16472	F1K1E105A029	C 1UF, Z, 25V	1		
C16490	F1H1C105A008	C 1UF, K, 16V	1		
C16491	F1L2J1020001	C 1000UF, K, 6.3V	1		
C16501	F1K1E105A029	C 1UF, Z, 25V	1		
C16502	F1L1E4750004	C 4.7UF, 25V	1		
C16503	F2A1E471A102	E 470UF, 25V	1		
C16504	F1L1E4750004	C 4.7UF, 25V	1		
C16505	F1K1E105A029	C 1UF, Z, 25V	1		
C16521	F1K1E105A029	C 1UF, Z, 25V	1		
C16522	F1L1E4750004	C 4.7UF, 25V	1		
C16523	F2A1E471A102	E 470UF, 25V	1		
C16524	F1L1E4750004	C 4.7UF, 25V	1		
C16525	F1L1E4750004	C 4.7UF, 25V	1		
C16533	F1H1H104A970	C 0.1UF, K, 50V	1		
C16535	F1H1H104A970	C 0.1UF, K, 50V	1		
C16536	F1H1H104A970	C 0.1UF, K, 50V	1		
C16562	F1H1C105A008	C 1UF, K, 16V	1		
C16563	F2A1A101A106	E 100UF, 10V	1		

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16564	F1H1C105A008	C 1UF, K, 16V	1	
	C16565	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16566	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16581	F1K1E105A029	C 1UF, Z, 25V	1	
	C16582	F1H1C105A008	C 1UF, K, 16V	1	
	C16593	F1H1H102A971	C 1000PF, K, 50V	1	
	C16602	F1H1H220A971	C 22PF, K, 50V	1	
	C16603	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16604	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16608	F1H1H221A971	C 220UF, K, 50V	1	
	C16631	F0C2E405A230	E 0.040UF, 250V	1	
	C16632	F0C2E405A230	E 0.040UF, 250V	1	
	C16633	F0C2E405A230	E 0.040UF, 250V	1	
	C16641	F1K2J222A014	C 2200UF, K, 6.3V	1	
	C16645	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16646	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16661	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16662	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16664	F1H1H820A971	C 82UF, 50V	1	
	C16665	F1H1H820A971	C 82UF, 50V	1	
	C16666	F1H1H820A971	C 82UF, 50V	1	
	C16668	F1H1H221A971	C 220UF, K, 50V	1	
	C16675	F1H1H391A971	C 391UF, 50V	1	
	C16684	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16685	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16691	F2A2C101A169	E 1000UF, 160V	1	
	C16692	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16707	F1H1H220A971	C 22PF, K, 50V	1	
	C16708	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16721	F2A1H101A128	E 100UF, 50V	1	
	C16723	F1L1E4750004	C 4.7UF, 25V	1	
	C16724	F1L1E4750004	C 4.7UF, 25V	1	
	C16725	F1L1E4750004	C 4.7UF, 25V	1	
	C16753	F1L1E4750004	C 4.7UF, 25V	1	
	C16755	F1L1E4750004	C 4.7UF, 25V	1	
	C16756	F1L1E4750004	C 4.7UF, 25V	1	
	C16771	F1H1C105A008	C 1UF, K, 16V	1	
	C16772	F1L1E4750004	C 4.7UF, 25V	1	
	C16773	F1L1E4750004	C 4.7UF, 25V	1	
	C16791	EEUFC1E221	E 220UF, 25V	1	
	C16795	F2A1E471A102	E 470UF, 25V	1	
	C16796	F2A1E471A102	E 470UF, 25V	1	
	C16797	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16813	F2A2T221A009	E 220UF, 220V	1	
	C16814	F1H1H561A971	C 560UF, 50V	1	
	C16821	F1J1H104A835	C 0.10UF, 50V	1	
	C16822	F2A2G470A187	E 470UF, 400V	1	
	C16823	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16842	F2A2C101A169	E 1000UF, 160V	1	
	C16843	F1J1H104A835	C 0.10UF, 50V	1	
	C16844	F1J1H104A835	C 0.10UF, 50V	1	
	C16856	F1H1A1050032	C 10UF, 50V	1	
	C16857	F1H1H472A970	C 4700PF, K, 50V	1	
	C16858	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16860	F1H1A1050032	C 10UF, 50V	1	
	C16861	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16862	F1H1A1050032	C 10UF, 50V	1	
	C16863	F1J1H104A835	C 0.10UF, 50V	1	
	C16864	F1J1H104A835	C 0.10UF, 50V	1	
	C16866	F1H1A1050032	C 10UF, 50V	1	
	C16867	F1H1A1050032	C 10UF, 50V	1	
	C16868	F1H1A1050032	C 10UF, 50V	1	
	C16869	F1J1H104A835	C 0.10UF, 50V	1	
	C16891	F1K1E105A029	C 1UF, Z, 25V	1	
	C16903	F1E2J332A002	C 3300PF, 600V	1	
	C17101	F1L2E154A028	E 1500UF, 25V	1	
	C17102	F1L2E154A028	E 1500UF, 25V	1	
	C17103	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17104	F1H1A1050032	C 10UF, 50V	1	
	C17105	F1L2E154A028	E 1500UF, 25V	1	
	C17106	F1L2E154A028	E 1500UF, 25V	1	
	C17107	F1H1A1050032	C 10UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17108	F1L2E154A028	E 1500UF, 25V	1	
	C17109	F1L2E154A028	E 1500UF, 25V	1	
	C17110	F1H1A1050032	C 10UF, 50V	1	
	C17111	F1L2E154A028	E 1500UF, 25V	1	
	C17112	F1L2E154A028	E 1500UF, 25V	1	
	C17113	F1H1A1050032	C 10UF, 50V	1	
	C17114	F1L2E154A028	E 1500UF, 25V	1	
	C17115	F1L2E154A028	E 1500UF, 25V	1	
	C17116	F1H1A1050032	C 10UF, 50V	1	
	C17117	F1L2E154A028	E 1500UF, 25V	1	
	C17118	F1L2E154A028	E 1500UF, 25V	1	
	C17119	F1H1A1050032	C 10UF, 50V	1	
	C17120	F1L2E154A028	E 1500UF, 25V	1	
	C17121	F1L2E154A028	E 1500UF, 25V	1	
	C17122	F1H1A1050032	C 10UF, 50V	1	
	C17123	F1L2E154A028	E 1500UF, 25V	1	
	C17124	F1L2E154A028	E 1500UF, 25V	1	
	C17125	F1H1A1050032	C 10UF, 50V	1	
	C17141	F1H1H101A971	C 100UF, 50V	1	
	C17202	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17203	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17204	F1L2E154A028	E 1500UF, 25V	1	
	C17205	F1L2E154A028	E 1500UF, 25V	1	
	C17206	F1H1A1050032	C 10UF, 50V	1	
	C17207	F1L2E154A028	E 1500UF, 25V	1	
	C17208	F1L2E154A028	E 1500UF, 25V	1	
	C17209	F1H1A1050032	C 10UF, 50V	1	
	C17210	F1L2E154A028	E 1500UF, 25V	1	
	C17211	F1L2E154A028	E 1500UF, 25V	1	
	C17212	F1H1A1050032	C 10UF, 50V	1	
	C17213	F1L2E154A028	E 1500UF, 25V	1	
	C17214	F1L2E154A028	E 1500UF, 25V	1	
	C17215	F1H1A1050032	C 10UF, 50V	1	
	C17216	F1L2E154A028	E 1500UF, 25V	1	
	C17217	F1L2E154A028	E 1500UF, 25V	1	
	C17218	F1H1A1050032	C 10UF, 50V	1	
	C17219	F1L2E154A028	E 1500UF, 25V	1	
	C17220	F1L2E154A028	E 1500UF, 25V	1	
	C17221	F1H1A1050032	C 10UF, 50V	1	
	C17222	F1L2E154A028	E 1500UF, 25V	1	
	C17223	F1L2E154A028	E 1500UF, 25V	1	
	C17224	F1H1A1050032	C 10UF, 50V	1	
	C17241	F1H1H101A971	C 100UF, 50V	1	
	CB1	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB2	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB3	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB4	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB5	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB6	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB7	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB8	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB9	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB10	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB11	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB12	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB13	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB14	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	CB15	K1MY55B00002	55P CONNECTOR	1	PAVCCZ
	D16001	B0FBCN00005	DIODE	1	
	D16002	B0FBCN00005	DIODE	1	
	D16021	B0FBCN00008	DIODE	1	
	D16022	B0FBCN00008	DIODE	1	
	D16032	MA2J11100L	DIODE	1	
	D16041	MA3DF46000LW	ZENER DIODE	1	
	D16042	MA3DF46000LW	ZENER DIODE	1	
	D16050	BOECKP000047	DIODE	1	
	D16051	B0FBCN00008	DIODE	1	
	D16052	B0FBCN00008	DIODE	1	
	D16101	MA22D3900L	DIODE	1	
	D16131	BOECKP000047	DIODE	1	
	D16151	BOECKP000047	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16152	BOECKP000047	DIODE	1	
	D16153	BOECKP000047	DIODE	1	
	D16191	BOECKP000047	DIODE	1	
	D16192	MA2J11100L	DIODE	1	
	D16193	BOECKP000047	DIODE	1	
	D16194	BOECKP000047	DIODE	1	
	D16195	BOECKP000047	DIODE	1	
	D16253	B3ABB0000210	LED	1	
	D16255	MA2J11100L	DIODE	1	
	D16280	MA2J11100L	DIODE	1	
	D16281	MAZ80510LL	ZENER DIODE	1	
	D16282	MAZ80680ML	ZENER DIODE	1	
	D16285	MA3X152D0L	DIODE	1	
	D16286	MA2J11100L	DIODE	1	
	D16315	MAZ81500ML	ZENER DIODE	1	
	D16316	BOECKP000047	DIODE	1	
	D16317	BOECKP000047	DIODE	1	
	D16401	B0FACR000006	DIODE	1	
	D16402	B0FACR000006	DIODE	1	
	D16407	MA22D3900L	DIODE	1	
	D16411	MA2J11100L	DIODE	1	
	D16421	MA3DF40001TV	ZENER DIODE	1	
	D16422	MA3DF40001TV	ZENER DIODE	1	
	D16451	BOECKP000047	DIODE	1	
	D16461	MA3DF46000LW	ZENER DIODE	1	
	D16462	MA3DF46000LW	ZENER DIODE	1	
	D16466	MA2J11100L	DIODE	1	
	D16473	MA3X152D0L	DIODE	1	
	D16474	MA2J11100L	DIODE	1	
	D16475	MAZ80510LL	ZENER DIODE	1	
	D16476	MA2J11100L	DIODE	1	
	D16477	MA2J11100L	DIODE	1	
	D16478	B0HCKS000002	DIODE	1	
	D16480	MA2J11100L	DIODE	1	
	D16481	B0FACP000001	DIODE	1	
	D16482	B0FACP000001	DIODE	1	
	D16490	BOECKP000047	DIODE	1	
	D16491	MA2J11100L	DIODE	1	
	D16492	MAZ80470ML	ZENER DIODE	1	
	D16493	MA3X152E0L	ZENER DIODE	1	
	D16503	BOECHR000001	DIODE	1	
	D16522	BOECKP000047	DIODE	1	
	D16523	BOECHR000001	DIODE	1	
	D16524	BOECKP000047	DIODE	1	
	D16534	BOECHR000001	DIODE	1	
	D16536	BOECHR000001	DIODE	1	
	D16583	B3ABB0000210	LED	1	
	D16602	MAZ81500ML	ZENER DIODE	1	
	D16604	MA3X152E0L	ZENER DIODE	1	
	D16605	MAZ80510LL	ZENER DIODE	1	
	D16606	BOECKM000038	DIODE	1	
	D16607	MA2J11100L	DIODE	1	
	D16608	MA8120M	ZENER DIODE	1	
	D16610	MA2J11100L	DIODE	1	
	D16615	MA2J11100L	DIODE	1	
	D16616	MA3X152E0L	ZENER DIODE	1	
	D16618	BOECKP000047	DIODE	1	
	D16619	BOECKP000047	DIODE	1	
	D16621	B0FBCN000006	DIODE	1	
	D16622	B0FBCN000006	DIODE	1	
	D16624	BOECKP000047	DIODE	1	
	D16625	MAZ82000ML	ZENER DIODE	1	
	D16641	B0FBCN000007	DIODE	1	
	D16643	B0FBCN000007	DIODE	1	
	D16645	MAZ81500ML	ZENER DIODE	1	
	D16646	MAZ81500ML	ZENER DIODE	1	
	D16647	MAZ81500ML	ZENER DIODE	1	
	D16648	MAZ80510LL	ZENER DIODE	1	
	D16649	MA2J11100L	DIODE	1	
	D16650	MA2J11100L	DIODE	1	
	D16652	BOECKP000047	DIODE	1	
	D16653	MA2J11100L	DIODE	1	
	D16654	MA2J11100L	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16662	MAZ81500ML	ZENER DIODE	1	
	D16663	MAZ81500ML	ZENER DIODE	1	
	D16664	MAZ81500ML	ZENER DIODE	1	
	D16669	MA2J11100L	DIODE	1	
	D16671	MA2J11100L	DIODE	1	
	D16673	B0ECHR000001	DIODE	1	
	D16674	B0ECHR000001	DIODE	1	
	D16677	MA3X152D0L	DIODE	1	
	D16678	MAZ815000L	ZENER DIODE	1	
	D16679	B0ECKP000047	DIODE	1	
	D16702	MA2J11100L	DIODE	1	
	D16710	MAZ815000L	ZENER DIODE	1	
	D16711	B0ECHR000001	DIODE	1	
	D16712	MAZ815000L	ZENER DIODE	1	
	D16713	B0ECHR000001	DIODE	1	
	D16714	MAZ815000L	ZENER DIODE	1	
	D16715	B0ECHR000001	DIODE	1	
	D16717	MAZ83300ML	ZENER DIODE	1	
	D16719	B0ECKP000047	DIODE	1	
	D16720	B0ECKP000047	DIODE	1	
	D16721	B0ECHR000001	DIODE	1	
	D16725	MA2J11100L	DIODE	1	
	D16765	B0ECHR000001	DIODE	1	
	D16791	MAZ82000ML	ZENER DIODE	1	
	D16792	MA2J11100L	DIODE	1	
	D16811	MA2J11100L	DIODE	1	
	D16820	MA3X152E0L	ZENER DIODE	1	
	D16821	MAZ83600ML	ZENER DIODE	1	
	D16824	MAZ83300ML	ZENER DIODE	1	
	D16825	MAZ83300ML	ZENER DIODE	1	
	D16859	B0HCKS000002	DIODE	1	
	D16860	B0HCKS000002	DIODE	1	
	D16865	B0ECKP000047	DIODE	1	
	D16871	MAZ83300ML	ZENER DIODE	1	
	D16874	MAZ80510LL	ZENER DIODE	1	
	D16875	MA2J11100L	DIODE	1	
	D16901	MA3X152E0L	ZENER DIODE	1	
	D16902	MA2J11100L	DIODE	1	
	D16920	MA3X152E0L	ZENER DIODE	1	
	IC16131	COZBZ0000895	IC	1	
	IC16151	COZBZ0001324	IC	1	
	IC16241	COJBAZ002811	IC	1	
	IC16251	C0BBBA000024	IC	1	
	IC16304	MIP3900MSSCF	IC	1	
	IC16312	C0DBZMC00006	IC	1	
	IC16464	COJBAB000715	IC	1	
	IC16465	COJBAB000715	IC	1	
	IC16471	C0DBEKA00003	IC	1	
	IC16490	C0DBZMC00006	IC	1	
	IC16491	NJM2406F	LINEAR IC	1	
	IC16501	COZBZ0001324	IC	1	
	IC16521	COZBZ0001324	IC	1	
	IC16561	COJBAZ001120	IC	1	
	IC16562	COJBAZ001120	IC	1	
	IC16563	COJBAB000388	IC	1	
	IC16564	COJBAB000715	IC	1	
	IC16581	C0BBBA000024	IC	1	
	IC16661	C0BBBA000024	IC	1	
	IC16691	COJBAC000363	IC	1	
	IC16692	C0DBZMC00006	IC	1	
	IC16724	C0CBADC00072	IC	1	
	IC16725	C0CBADC00072	IC	1	
	IC16771	C0CBADC00072	IC	1	
	IC16773	COJBAB000715	IC	1	
	IC16784	MIP9L02MBS	IC	1	
	IC16786	MIP3900MSSCF	IC	1	
	IC16787	C0DBZMC00006	IC	1	
	IC16788	MIP3900MSSCF	IC	1	
	IC16789	C0DBZMC00006	IC	1	
	IC16791	EHMDD9920	LINEAR IC	1	
	IC16792	NJM2406F	LINEAR IC	1	
	IC16793	C0DBZMC00006	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC16801	C0DBZMC00006	IC	1	
	IC16920	C0BBBA000024	IC	1	
	IC17101	COJBAZ001120	IC	1	
	IC17201	COJBAZ001120	IC	1	
	IC17202	COJBAZ001120	IC	1	
	L16001	G0C1R1KA0206	PEAKING COIL	1	
	L16003	G0C1R1KA0206	PEAKING COIL	1	
	L16004	G0C1R1KA0206	PEAKING COIL	1	
	L16013	G0C1R1KA0206	PEAKING COIL	1	
	L16014	G0C1R1KA0206	PEAKING COIL	1	
	L16015	G0C1R1KA0206	PEAKING COIL	1	
	L16103	G0ZZ00002183	PEAKING COIL	1	
	L16222	G0ZZ00002183	PEAKING COIL	1	
	L16271	G0ZZ00002183	PEAKING COIL	1	
	L16303	G0C471KA0167	PEAKING COIL	1	
	L16401	G0C1R1KA0206	PEAKING COIL	1	
	L16402	G0C1R1KA0206	PEAKING COIL	1	
	L16403	G0C1R1KA0206	PEAKING COIL	1	
	L16411	G0C1R1KA0206	PEAKING COIL	1	
	L16412	G0C1R1KA0206	PEAKING COIL	1	
	L16413	G0C1R1KA0206	PEAKING COIL	1	
	L16472	G0ZZ00002183	PEAKING COIL	1	
	L16697	G0C102KA0187	PEAKING COIL	1	
	L16698	G0C681MA0065	PEAKING COIL	1	
	L16699	G0C471KA0167	PEAKING COIL	1	
	L16851	G0ZZ00002183	PEAKING COIL	1	
	PC16191	B3PBA0000496	IC	1	
	PC16301	B3PBA0000498	IC	1	
	PC16461	B3PBA0000457	IC	1	
	PC16480	B3PBA0000498	IC	1	
	PC16601	B3PBA0000498	IC	1	
	PC16603	B3PBA0000498	IC	1	
	PC16684	B3PBA0000496	IC	1	
	PC16685	B3PBA0000496	IC	1	
	PC16722	B3PBA0000498	IC	1	
	PC16723	B3PBA0000498	IC	1	
	PC16896	B3PBA0000498	IC	1	
	▲ PCB	ETX2MM747MFF	CIRCUIT BOARD P	1	(RTL) PAVCCZ
	▲ PCB	TNPA4762	CIRCUIT BOARD C1	1	(RTL)
	▲ PCB	TNPA4763	CIRCUIT BOARD C2	1	(RTL)
	▲ PCB	TNPA4844AD	CIRCUIT BOARD SC	1	(RTL)
	▲ PCB	TNPA4785	CIRCUIT BOARD SD	1	
	▲ PCB	TNPA4783AD	CIRCUIT BOARD SS	1	(RTL)
	▲ PCB	TNPA4802	CIRCUIT BOARD SS2	1	(RTL)
	▲ PCB	TNPA4784	CIRCUIT BOARD SU	1	
	Q16001	2PG0060000RP	TRANSISTOR	1	
	Q16002	2PG0060000RP	TRANSISTOR	1	
	Q16004	2PG0060000RP	TRANSISTOR	1	
	Q16021	B1JADP00004	TRANSISTOR	1	
	Q16022	B1JADP00004	TRANSISTOR	1	
	Q16023	B1JADP00004	TRANSISTOR	1	
	Q16041	B1JAEN00007	TRANSISTOR	1	PAVCCZ
	Q16051	B1JAEN00007	TRANSISTOR	1	PAVCCZ
	Q16055	B1HFPPFA00001	TRANSISTOR	1	
	Q16056	B1HFPPFA00001	TRANSISTOR	1	
	Q16101	2SK399500L	FET	1	
	Q16102	2SK399500L	FET	1	
	Q16141	B1HFPPFA00001	TRANSISTOR	1	
	Q16161	B1HFPPFA00001	TRANSISTOR	1	
	Q16191	B1HFPPFA00001	TRANSISTOR	1	
	Q16251	2SD0601ARL	TRANSISTOR	1	
	Q16280	2SD0601ARL	TRANSISTOR	1	
	Q16402	2PG0110000RP	TRANSISTOR	1	
	Q16403	2PG0110000RP	TRANSISTOR	1	
	Q16404	2PG0110000RP	TRANSISTOR	1	
	Q16422	B1JAEP00004	TRANSISTOR	1	
	Q16423	B1JAEP00004	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16424	B1JAEPO00004	TRANSISTOR	1	
	Q16441	B1JAEPO00007	TRANSISTOR	1	
	Q16452	B1JAEPO00006	TRANSISTOR	1	
	Q16471	B1ABCF000231	TRANSISTOR	1	
	Q16490	B1CBGD000001	FET	1	
	Q16501	B1HFPPA00001	TRANSISTOR	1	
	Q16502	B1HFPPA00001	TRANSISTOR	1	
	Q16521	B1HFPPA00001	TRANSISTOR	1	
	Q16522	B1HFPPA00001	TRANSISTOR	1	
	Q16531	B1HFPPA00001	TRANSISTOR	1	
	Q16551	B1HFPPA00001	TRANSISTOR	1	
	Q16601	B1CERR000025	FET	1	
	Q16602	2SD0601AQL	TRANSISTOR	1	
	Q16603	2SB0709ASL	TRANSISTOR	1	
	Q16604	B1CHPM000001	FET	1	
	Q16606	2SD0601AQL	TRANSISTOR	1	
	Q16607	B1CBGD000001	FET	1	
	Q16608	B1CBGD000001	FET	1	
	Q16621	B1JADN000004	TRANSISTOR	1	
	Q16623	B1JADN000004	TRANSISTOR	1	
	Q16624	2SB0709ASL	TRANSISTOR	1	
	Q16645	2SD0601AQL	TRANSISTOR	1	
	Q16646	2SB0709ASL	TRANSISTOR	1	
	Q16647	B1CBGD000001	FET	1	
	Q16649	B1ABCN000007	TRANSISTOR	1	
	Q16660	B1CERR000025	FET	1	
	Q16661	B1JAER000003	TRANSISTOR	1	
	Q16662	2SD0601AQL	TRANSISTOR	1	
	Q16663	2SB0709ASL	TRANSISTOR	1	
	Q16667	2SB0709ARL	TRANSISTOR	1	
	Q16668	2SD0601AQL	TRANSISTOR	1	
	Q16670	B1ADCN000007	TRANSISTOR	1	
	Q16671	B1ABCF000231	TRANSISTOR	1	
	Q16675	B1ADCN000007	TRANSISTOR	1	
	Q16676	B1ABCF000231	TRANSISTOR	1	
	Q16677	2SD0601AQL	TRANSISTOR	1	
	Q16678	B1ABCF000231	TRANSISTOR	1	
	Q16701	B1ADCN000007	TRANSISTOR	1	
	Q16702	B1ABCF000231	TRANSISTOR	1	
	Q16743	2SD0601ARL	TRANSISTOR	1	
	Q16762	B1HFPPA00001	TRANSISTOR	1	
	Q16801	B1ADCN000007	TRANSISTOR	1	
	Q16810	B1ABCF000231	TRANSISTOR	1	
	Q16815	B1ABCN000007	TRANSISTOR	1	
	Q16816	2SD0601AQL	TRANSISTOR	1	
	Q16817	B1CBGD000001	FET	1	
	Q16818	B1CBGD000001	FET	1	
	Q16874	B1CBGD000001	FET	1	
	Q16875	B1ABCF000231	TRANSISTOR	1	
	Q16876	B1ABCF000231	TRANSISTOR	1	
	Q16882	B1ABCF000231	TRANSISTOR	1	
	Q16884	2SD0601ARL	TRANSISTOR	1	
	Q16920	B1ABCN000007	TRANSISTOR	1	
	R16001	D0GF7R5JA047	M 7.5 OHM, J, 0.33W	1	
	R16002	D0GF7R5JA047	M 7.5 OHM, J, 0.33W	1	
	R16004	D0GF7R5JA047	M 7.5 OHM, J, 0.33W	1	
	R16021	D0GF7R5JA047	M 7.5 OHM, J, 0.33W	1	
	R16022	D0GF7R5JA047	M 7.5 OHM, J, 0.33W	1	
	R16023	D0GF7R5JA047	M 7.5 OHM, J, 0.33W	1	
	R16031	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16032	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16033	D1BD5602A044	M 56KOHM, 1/10W	1	
	R16034	D1BD2702A044	M 27KOHM, 1/10W	1	
	R16041	D0GF5R6JA047	M 5.6 OHM, J, 0.33W	1	
	R16051	D0GF5R6JA047	M 5.6 OHM, J, 0.33W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16101	D0GD221JA059	M 220 OHM, J, 1/10W	1	
	R16102	D0GD221JA059	M 220 OHM, J, 1/10W	1	
	R16103	D0GD100JA059	M 10 OHM, J, 0.25W	1	
	R16104	D0GD100JA059	M 10 OHM, J, 0.25W	1	
	R16105	ERJ6GEYJ474	M 470KOHM, J, 1/8W	1	
	R16109	D0GD100JA059	M 10 OHM, J, 0.25W	1	
	R16110	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16116	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16131	D0GD101JA036	M 100 OHM, J, 0.25W	1	
	R16132	D0GD101JA036	M 100 OHM, J, 0.25W	1	
	R16134	D0GD750JA059	M 75 OHM, J, 0.25W	1	
	R16137	D0GF1R0JA047	M 1.0 OHM, J, 0.33W	1	
	R16141	D0GD100JA059	M 10 OHM, J, 0.25W	1	
	R16142	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16143	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16151	D0GD101JA036	M 100 OHM, J, 0.25W	1	
	R16152	D0GD101JA036	M 100 OHM, J, 0.25W	1	
	R16154	D0GD750JA059	M 75 OHM, J, 0.25W	1	
	R16155	D0GF1R0JA047	M 1.0 OHM, J, 0.33W	1	
	R16159	D0GF1R0JA047	M 1.0 OHM, J, 0.33W	1	
	R16161	D0GD100JA059	M 10 OHM, J, 0.25W	1	
	R16162	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16163	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16171	D0GD100JA059	M 10 OHM, J, 0.25W	1	
	R16172	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16173	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16181	D0GD100JA059	M 10 OHM, J, 0.25W	1	
	R16182	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16183	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16191	ERJ6GEYJ151V	M 150 OHM, J, 1/10W	1	
	R16192	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16193	ERJ6GEYJ750	M 75 OHM, J, 1/10W	1	
	R16194	D0GF7R5JA047	M 7.5 OHM, J, 0.33W	1	
	R16195	D0GF1R0JA047	M 1.0 OHM, J, 0.33W	1	
	R16196	D0GF7R5JA047	M 7.5 OHM, J, 0.33W	1	
	R16230	ERJ6GEYJ470V	M 47 OHM, J, 1/10W	1	
	R16231	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16241	EXB38V470J	RESISTOR ARRAY	1	
	R16242	EXB38V472JV	RESISTOR ARRAY	1	
	R16251	D1BD1401A044	M 1.4KOHM, 1/10W	1	
	R16252	D1BD3902A044	M 39KOHM, 1/10W	1	
	R16253	D1BD3902A044	M 39KOHM, 1/10W	1	
	R16254	D1BD6801A044	M 6.8KOHM, 1/10W	1	
	R16255	D1BD1201A044	M 1.2KOHM, 1/10W	1	
	R16256	D1BD1501A044	M 1.4KOHM, 1/10W	1	
	R16257	ERJ6GEYJ273	M 27KOHM, J, 1/10W	1	
	R16258	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16260	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16280	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16281	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R16282	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R16283	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16284	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R16285	EXB38V623J	RESISTOR ARRAY	1	
	R16288	D0GF334JA047	M 330KOHM, F, 0.33W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16289	D0GF334JA047	M 330KOHM, F, 0 .33W	1	
	R16290	D0GF334JA047	M 330KOHM, F, 0 .33W	1	
	R16302	ERJ6GEYJ333	M 33KOHM, J, 1/8W	1	
	R16307	ERJ6RBD683	M 68KOHM, J, 1/10W	1	
	R16309	ERJ6GEYJ333	M 33KOHM, J, 1/8W	1	
	R16310	ERJ6GEYJ333	M 33KOHM, J, 1/8W	1	
	R16311	ERJ6GEYJ333	M 33KOHM, J, 1/8W	1	
	R16317	ERJ6RBD162	M 1.6KOHM, J, 1/ 10W	1	
	R16318	ERJ6RBD683	M 68KOHM, J, 1/10W	1	
	R16319	ERJ6RBD2491	M 2.49KOHM, 1/ 10W	1	PAVCCZ
	R16320	ERJ14YJ683	M 68KOHM, 1/2W	1	
	R16330	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16332	ERJ6GEYJ474	M 470KOHM, J,1/ 10W	1	
	R16334	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16335	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16402	ERJT08J7R5V	M 7.50OHM, J, 0 .33W	1	
	R16403	ERJT08J7R5V	M 7.50OHM, J, 0 .33W	1	
	R16404	ERJT08J7R5V	M 7.50OHM, J, 0 .33W	1	
	R16410	ERJ6GEYG391	M 390 OHM, F, 1/ 10W	1	
	R16411	D1BD2700A044	M 270 OHM, 1/10W	1	
	R16414	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16415	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16416	D0GD103JA036	M 10KOHM, J, 0 .25W	1	
	R16422	ERJT08J7R5V	M 7.50OHM, J, 0 .33W	1	
	R16423	ERJT08J7R5V	M 7.50OHM, J, 0 .33W	1	
	R16424	ERJT08J7R5V	M 7.50OHM, J, 0 .33W	1	
	R16441	ERJT08J5R6V	M 5.6 OHM, F, 0 .33W	1	
	R16452	ERJT08J5R6V	M 5.6 OHM, F, 0 .33W	1	
	R16465	D1BD2702A044	M 27KOHM, 1/10W	1	
	R16466	D1BD5602A044	M 56KOHM, 1/10W	1	
	R16467	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16468	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16471	ERJ6GEYG392	M 3.9KOHM, J,1/ 10W	1	
	R16472	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16473	ERJ6GEYF561	M 560 OHM, F, 1/ 10W	1	
	R16474	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16475	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16476	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16478	ERJ6GEYJ562V	M 5.6KOHM, J,1/ 10W	1	
	R16479	D0GD103JA036	M 10KOHM, J, 0 .25W	1	
	R16480	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16490	ERJ6RED134V	M 130KOHM, 1/10W	1	
	R16491	ERJ6RED124	M 120KOHM, 1/10W	1	
	R16492	ERJ6RED154	M 150KOHM, 1/10W	1	
	R16493	ERJ6RBD103V	M 10KOHM, J, 1/10W	1	
	R16494	D1BD2001A044	M 2KOHM, 1/10W	1	
	R16495	D1BD6800A044	M 680 OHM, 1/10W	1	
	R16496	ERJ6GEYJ470V	M 47 OHM, J, 1/10W	1	
	R16497	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16498	D0GD103JA036	M 10KOHM, J, 0 .25W	1	
	R16501	D0GD101JA036	M 100 OHM, J, 0 .25W	1	
	R16502	D0GD101JA036	M 100 OHM, J, 0 .25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16503	ERJT06J100V	M 10 OHM, F, 0 .25W	1	
	R16504	ERJT06J750V	M 75 OHM, F, 0 .25W	1	
	R16505	ERJT06J100V	M 10 OHM, F, 0 .25W	1	
	R16506	ERJT06J100V	M 10 OHM, F, 0 .25W	1	
	R16507	ERJT06J100V	M 10 OHM, F, 0 .25W	1	
	R16509	ERJT08J1R0V	M 1.8OHM, J, 0 .33W	1	
	R16511	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16512	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16513	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16514	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16516	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16517	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16518	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16519	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16521	D0GD101JA036	M 100 OHM, J, 0 .25W	1	
	R16522	D0GD101JA036	M 100 OHM, J, 0 .25W	1	
	R16523	ERJT06J750V	M 75 OHM, F, 0 .25W	1	
	R16531	ERJT06J100V	M 10 OHM, F, 0 .25W	1	
	R16532	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16533	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16534	ERJT08J1R0V	M 1.8OHM, J, 0 .33W	1	
	R16536	ERJT08J1R0V	M 1.8OHM, J, 0 .33W	1	
	R16551	ERJT06J100V	M 10 OHM, F, 0 .25W	1	
	R16552	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16553	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16554	EXB38V470J	RESISTOR ARRAY	1	
	R16561	EXB38V470J	RESISTOR ARRAY	1	
	R16562	EXB38V470J	RESISTOR ARRAY	1	
	R16563	EXB38V470J	RESISTOR ARRAY	1	
	R16564	EXB38V470J	RESISTOR ARRAY	1	
	R16565	EXB38V472JV	RESISTOR ARRAY	1	
	R16566	EXB38V472JV	RESISTOR ARRAY	1	
	R16567	EXB38V472JV	RESISTOR ARRAY	1	
	R16568	EXB38V472JV	RESISTOR ARRAY	1	
	R16570	EXB38V472JV	RESISTOR ARRAY	1	
	R16573	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
	R16579	EXB38V470J	RESISTOR ARRAY	1	
	R16582	D1BD3902A044	M 39KOHM, 1/10W	1	
	R16583	D1BD3902A044	M 39KOHM, 1/10W	1	
	R16584	D1BD6801A044	M 6.8KOHM, 1/10W	1	
	R16585	D1BD1001A044	M 1KOHM, 1/10W	1	
	R16586	D1BD2151A044	M 2.15KOHM, 1/10W	1	
	R16587	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16588	D0GD103JA036	M 10KOHM, J, 0 .25W	1	
	R16590	ERJ6GEYJ221V	M 220 OHM, J, 1/ 10W	1	
	R16591	EXB38V472JV	RESISTOR ARRAY	1	
	R16592	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16593	D1BD1401A044	M 1.4KOHM, 1/10W	1	
	R16602	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16604	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16605	ERJ6GEYG182	M 1.8KOHM, J, 1/ 10W	1	
	R16606	D0GD103JA036	M 10KOHM, J, 0 .25W	1	
	R16607	D1BD6651A044	M 6.65KOHM, 1/10W	1	
	R16608	ERJT08J102V	M 1KOHM, J, 0 .33W	1	
	R16609	ERJT08J102V	M 1KOHM, J, 0 .33W	1	
	R16610	ERJ6GEYJ104V	M 100KOHM, J, 1/ 10W	1	
	R16611	ERJ8GEYJ683	M 68KOHM, J, 1/8W	1	
	R16612	ERJT06J470V	M 47 OHM, F, 0 .25W	1	
	R16613	ERJ8GEYJ473	M 47KOHM, J, 1/8W	1	
	R16614	ERJ8GEYJ683	M 68KOHM, J, 1/8W	1	
	R16615	D1BD1101A044	M 1.41KOHM, 1/10W	1	
	R16617	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16621	ERJ6GEYJ221V	M 220 OHM, J, 1/ 10W	1	

Safety Ref.	Part No.	Part Name & Description	PCS	Remarks
R16826	D0GDI03JA036	M 1K OHM J 1/10W 1		
R16829	ERJ6EEYJ102V	M 1K OHM J 1/10W 1	1	
R16831	DBBD6192A044	M61.9KOHM, 1/10W 1		
R16832	DBBD7322A044	M73.2KOHM, 1/10W 1		
R16833	D0GDI03JA036	M73.2KOHM, 1/10W 1		
R16838	ERJ14YJ563U	M56KOHM, 1/2W 1		
R16841	ERJ14YJ563U	M56KOHM, 1/2W 1		
R16844	DBBD1241A044	M1.24KOHM, 1/2W 1		
R16845	DBBD622A044	M86.6KOHM, 1/10W 1		
R16847	ERJ6EEYJ472V	M 4.7K OHM J 1/ 1		
R16848	ERJ6EEYJ474	M 4.7K OHM J 1/ 1		
R16851	ERJ6EEYJ474	M 4.7K OHM J 1/ 1		
R16860	D0D8R2JA021	M 8.2 OHM J,2W 1	10W	
R16869	ERJ8GEYJ473	M 47KOHM, J 1/8W 1		
R16870	ERJ4AYJ683	M 68KOHM, 1/2W 1		
R16873	DBBD249A044	M2.49KOHM, 1/10W 1		
R16877	ERJ6EEYJ681	M 680 OHM, J,1/ 1		
R16891	DBBD4702A044	M 47KOHM, 1/10W 1		
R16892	DBBD4702A044	M 47KOHM, 1/10W 1		
R16893	DBBD4702A044	M 47KOHM, 1/10W 1		
R16894	DBBD4702A044	M 47KOHM, 1/10W 1		
R16895	DBBD4702A044	M 47KOHM, 1/10W 1		
R16896	DBBD4702A044	M 33KOHM, 1/10W 1		
R16897	DBBD1741A044	M1.74KOHM, 1/10W 1		
R16898	DBBD2371A044	M2.37KOHM, 1/10W 1		
R16899	DBBD2261A044	M2.61KOHM, 1/10W 1		
R16900	D0GDI03JA036	M 10K OHM, J,0.25W 1		
R16901	ERJ6EEYJ472V	M 4.7K OHM J 1/ 1		
R16926	ERJ6EEYJ222V	M 2.2K OHM J 1/ 1		
R16927	ERJ6EEYJ223	M 22KOHM, J,1/10W 1		
R1701	D0GDR0020002	M 0 OHM, 1/10W 1		
R1702	ERJ3GEYR00	M 0 OHM, 1/16W 1		
R1703	EXB38V7681J	M 220KOHM, J,1/16W 1		
R1704	EXB38V4703	M 100 OHM, J,1/16W 1		
R1705	EXB38V7681J	M 220KOHM, J,1/16W 1		
R1706	EXB38V4703	M 100 OHM, J,1/16W 1		
R1707	ERJ14J688U	C6.8 OHM, J,1/4W 1		
R1708	ERJ14J688U	C6.8 OHM, J,1/4W 1		
R1709	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1710	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1711	ERJ14J688U	C6.8 OHM, J,1/4W 1		
R1712	ERJ14J688U	C6.8 OHM, J,1/4W 1		
R1713	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1714	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1715	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1716	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1717	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1718	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1719	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1720	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1721	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1722	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1723	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1724	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1725	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1726	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1727	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1728	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1729	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1730	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1731	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1732	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1733	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1734	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1735	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1736	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1737	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1738	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1739	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1740	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1741	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1742	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1743	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1744	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1745	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1746	ERJ3GEYJ201	M 200 OHM, J,1/ 1		
R1747	ERJ3GEYJ101	M 100 OHM, J,1/ 1		
R1748	DOGE472JA047	M 4.7K OHM, J, 1		
R1749	ERJ3GEYR00	M 0 OHM, 1/16W 1		
R1750	D0GB102JA057	M 1KOHM, J,1/16W 1		
R1751	ERJ3GEYJ224	M 220KOHM, J,1/16W 1		
R1752	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1753	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1754	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1755	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1756	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1757	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1758	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1759	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1760	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1761	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1762	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1763	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1764	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1765	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1766	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1767	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1768	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1769	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1770	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1771	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1772	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1773	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1774	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1775	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1776	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1777	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1778	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1779	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1780	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1781	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1782	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1783	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1784	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1785	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1786	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1787	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1788	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1789	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1790	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1791	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1792	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1793	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1794	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1795	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1796	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1797	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1798	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1799	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1800	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1801	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1802	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1803	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1804	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1805	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1806	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1807	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1808	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1809	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1810	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1811	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1812	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1813	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1814	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1815	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1816	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1817	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1818	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1819	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1820	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1821	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1822	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1823	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1824	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1825	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1826	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1827	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1828	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1829	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1830	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1831	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1832	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1833	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1834	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1835	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1836	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1837	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1838	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1839	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1840	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1841	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1842	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1843	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1844	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1845	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1846	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1847	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1848	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1849	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1850	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1851	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1852	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1853	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1854	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1855	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1856	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1857	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1858	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1859	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1860	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1861	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1862	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1863	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1864	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1865	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1866	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		
R1867	ERJ6EEYJ101	M 100 OHM, J,1/ 1		
R1868	ERJ6EEYJ224	M 220KOHM, J,1/16W 1		

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
▲	C501	ACLE103KC	PLASTIC FILM CAPACITOR(Xcap)	1	
	C503	ACKMQ2W330T	A1 ELECTROLYTIC CAPACITOR	1	
	C504	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C505	ACKZE1H220T	50V 22PF	1	
	C506	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C507	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C508	ACMBB474K2T	CERAMIC CHIP CAPACITOR	1	
	C509	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C510	ACKZE1H100T	50V 10PF	1	
	C511	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C512	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C513	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C514	ACKZE1H221T	50V 220PF	1	
	C515	ACKZE1H220T	50V 22PF	1	
	C551	ACKZE1A471C	10V 470PF	1	
	C553	ACMEB474K1T	CERAMIC CHIP CAPACITOR	1	
	C554	ACKZE1E821LT	ELECTROLYTIC CAPACITOR	1	
	C555	ACMBB225K2T	CERAMIC CHIP CAPACITOR	1	
	C556	ACMBB105K2T	CERAMIC CHIP CAPACITOR	1	
	C557	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C558	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C560	ACKZE1E221T	ELECTROLYTIC CAPACITOR	1	
	C561	ACKZE1H100T	50V 10PF	1	
▲	C573	ECKD3A221KRP	CERAMIC CAPACITOR	1	
▲	C601	ACLEMX474KC	PLASTIC FILM CAPACITOR(Xcap)	1	
▲	C602	ECKENA221KBR	C 221P 250V	1	
▲	C603	ECKENA221KBR	C 221P 250V	1	
	C604	ACLEMX474KC	PLASTIC FILM CAPACITOR(Xcap)	1	
	C605	ECWF2W105KA	PLASTIC FILM CAPACITOR(PP)	1	
	C606	ACTEB104K5T	CERAMIC CHIP CAPACITOR	1	
	C608	ACTEB683K5T	CERAMIC CHIP CAPACITOR	1	
	C609	ACTEB104K5T	CERAMIC CHIP CAPACITOR	1	
	C610	ACTEB223K5T	CERAMIC CHIP CAPACITOR	1	
	C611	ECJ1VC1H471J	C 470PF J 50V	1	
	C613	ECJ1VC1H471J	C 470PF J 50V	1	
	C614	ACTEB104K5T	CERAMIC CHIP CAPACITOR	1	
	C615	ACTEB104K5T	CERAMIC CHIP CAPACITOR	1	
	C616	ACTEB104K5T	CERAMIC CHIP CAPACITOR	1	
	C618	ECJ1VB1H472K	C 4700PF, K, 50V	1	
	C620	ACMBB474K2T	CERAMIC CHIP CAPACITOR	1	
	C621	ECQE6472B45	C 4700U 630V	1	
▲	C622	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
▲	C623	ACKMQ2W391KZ	A1 ELECTROLYTIC CAPACITOR	1	
	C624	ECKENA331KBR	CERAMIC CAPACITOR	1	
	C626	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C627	ECQE6473RKF	P 0.047UF, K, 630V	1	
	C628	ACKZE1H220T	50V 22PF	1	
	C629	ECQV1H334JL	PLASTIC FILM CAPACITOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C630	ECJ1XC1H102J	C 1000PF, J, 50V	1	
	C701	ACKZE1A221T	ELECTROLYTIC CAPACITOR	1	
	C702	ACMEB104K5T	CERAMIC CHIP CAPACITOR	1	
	C703	ACMEB104K5T	CERAMIC CHIP CAPACITOR	1	
	C704	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C705	ACMEB104K5T	CERAMIC CHIP CAPACITOR	1	
	C706	ECJ2VB1H102K	C 1000PF, J, 50V	1	
	C711	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C712	ACMEB224K2T	CERAMIC CHIP CAPACITOR	1	
	C713	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C714	ACMEB223K5T	CERAMIC CHIP CAPACITOR	1	
	CN01	AKB6B-PH-KS	CONNECTOR	1	
	D201	VDAG01AT	DIODE	1	
	D202	VDAG01AT	DIODE	1	
	D203	MA165TAKU	DIODE	1	
	D204	VDERA83-004T	DIODE	1	
	D205	VDERA83-004T	DIODE	1	
	D206	VDERA83-004T	DIODE	1	
	D207	VDERA83-004T	DIODE	1	
	D208	MA165TAKU	DIODE	1	
	D209	VDAG01AT	DIODE	1	
	D252	VDSAR02LFA4	DIODE	1	
	D253	VDY971S8R	DIODE	1	
	D254	VDY971S8R	DIODE	1	
	D351	VDFCH10A10	DIODE	1	
	D353	MA3DF3000S	DIODE	1	
	D356	VDRK36C4	DIODE	1	
	D358	VD1T7GA1	DIODE	1	
	D359	VDFCHS10A045	DIODE	1	
	D360	VDSAR02LFA4	DIODE	1	
▲	D501	VDS1WBA80	DIODE	1	
	D502	MA165TAKU	DIODE	1	
	D503	VXSTD82BL3	DIODE	1	
	D504	VDAG01AT	DIODE	1	
	D505	VDAG01AT	DIODE	1	
▲	D507	VD1T7GA1	DIODE	1	
	D551	VDFCH20B10	DIODE	1	
	D552	MA2DF3100S	DIODE	1	
	D601	MA165TAKU	DIODE	1	
	D602	MA165TAKU	DIODE	1	
▲	D603	VDD15XB80	DIODE	1	
	D605	MA165TAKU	DIODE	1	
	D606	VDS3V60L1	DIODE	1	
	D607	VDYG982S6R	DIODE	1	
	D608	VDAG01AT	DIODE	1	
▲	D609	VD1T7GA1	DIODE	1	
	D701	VDERA83-004T	DIODE	1	
▲	F351	HU216008BEP	FUSE	1	
▲	F501	HU215002BEP	FUSE	1	
▲	F601	HU215010BEP	FUSE	1	
▲	F602	HU215010BEP	FUSE	1	
▲	F603	HU216002BEP	FUSE	1	
	IC201	VINJM2904ME1	INTEGRATED CIRCUIT	1	
	IC202	VISSC9101M	INTEGRATED CIRCUIT	1	
	IC251	VIKIA431A	INTEGRATED CIRCUIT	1	
	IC351	VIKIA431A	INTEGRATED CIRCUIT	1	
	IC352	VISC2628T	INTEGRATED CIRCUIT	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC353	VIIBD9703FP	POWER INTEGRATED CIRCUIT	1	
▲	IC501	MIP3E50MY	POWER INTEGRATED CIRCUIT	1	
	IC551	VIKIA431A	INTEGRATED CIRCUIT	1	
	IC601	VIFA5502MTE1	INTEGRATED CIRCUIT	1	
	IC701	VILC87F2G081	INTEGRATED CIRCUIT	1	
	IC702	VIR3111N40AT	INTEGRATED CIRCUIT	1	
▲	K602	ALKT329C93	RELAY	1	
▲	K604	ALKT329C93	RELAY	1	
▲	K605	ALKT329C93	RELAY	1	
L351	AYS1615005Y	CHOKE COIL	1		
L352	ELC10E470L	CHOKE COIL	1		
L353	EXCELSA24T	FERRITE BEAD INDUCTOR	1		
L501	EXCELSA35T	BEAD CHOKE	1		
L502	EXCELDR35V	CORE	1		
L503	EXCELDR35V	CORE	1		
▲	L601	AYP2512305Y	FILTER CHOKE	1	
▲	L602	AYP2512305Y	FILTER CHOKE	1	
L603	ETB42AY11GAD	CHOKE COIL	1		
L604	EXCELSA35T	BEAD CHOKE	1		
P2	AKB2P3S-VH	CONNECTOR	1		
P6	AKB12B-EH-A	12P CONNECTOR	1		
P7	AKB11B-EH-A	11P CONNECTOR	1		
▲	P9	AKS02B-VT	CONNECTOR	1	
P11	AKB3P4S-VH-L	CONNECTOR	1		
P25	AKB13B-PH-KS	13P CONNECTOR	1		
P34	AKB3B-PH-KS	CONNECTOR	1		
P35	AKB4B-PH-KS	CONNECTOR	1		
P60	AKB3B-EH-A	CONNECTOR	1		
▲	PC201	VPS2581AL2HE	OPTOISOLATOR	1	
▲	PC301	VPS2581AL2HE	OPTOISOLATOR	1	
▲	PC501	VPS2581AL2HE	OPTOISOLATOR	1	
▲	PC502	VPS2581AL2HE	OPTOISOLATOR	1	
▲	PC503	VPS2581AL2HE	OPTOISOLATOR	1	
▲	PC504	VPS2581AL2HE	OPTOISOLATOR	1	
Q201	2SC5866T	TRANSISTOR	1		
Q202	2SC5866T	TRANSISTOR	1		
▲	Q203	VKFMV19N57ES	FET	1	
▲	Q204	VKFMV19N57ES	FET	1	
▲	Q205	VKFMV19N57ES	FET	1	
▲	Q206	VKFMV19N57ES	FET	1	
Q207	2SA2094T	TRANSISTOR	1		
Q208	2SA2094T	TRANSISTOR	1		
Q354	2SD0601ARL	TRANSISTOR	1		
Q355	2SJ651	FET	1		
Q501	2SB710A-RTX	TRANSISTOR	1		
Q502	2SK3018TL	FET	1		
Q503	2SC5866T	TRANSISTOR	1		
Q504	2SB709-R-RTX	TRANSISTOR	1		
Q505	2SK3018TL	FET	1		
Q506	2SB709-R-RTX	TRANSISTOR	1		
Q551	2SJ651	FET	1		
Q557	VKHAT1130R	FET	1		
▲	Q601	VKFMR23N57E	FET	1	
Q602	2SC5866T	TRANSISTOR	1		
Q603	2SA2094T	TRANSISTOR	1		
▲	Q604	VKFMR23N57E	FET	1	
Q605	2SB709-R-RTX	TRANSISTOR	1		
Q606	2SD0601ARL	TRANSISTOR	1		
▲	Q701	2SD0601ARL	TRANSISTOR	1	
Q702	2SD0601ARL	TRANSISTOR	1		
Q703	2SB710A-RTX	TRANSISTOR	1		

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q704	2SD0601ARL	TRANSISTOR	1	
	Q705	2SB710A-RTX	TRANSISTOR	1	
	R201	D0GB103JA057	M 10K OHM J 1/16W	1	
	R202	ERJ6GEYJ100V	M 10 OHM,J,1/10W	1	
	R203	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R204	ERQ14AJ100JP	FUSIBLE METAL FILM RESISTOR	1	
	R206	ERQ14ZJ1R0JP	FUSIBLE METAL FILM RESISTOR	1	
	R207	ERQ14AJ100JP	FUSIBLE METAL FILM RESISTOR	1	
	R209	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R210	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R211	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R212	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	R213	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R214	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	R215	ERJ3GEYD153V	M 15KOHM,J,1/16W	1	
	R216	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R225	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R226	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R227	ERJ6ENF1001	M 1KOHM, 1/10W	1	
	R228	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
	R229	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R231	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R232	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R233	ERJ6ENF82R0	M 82 OHM, 1/10W	1	
	R234	ERJ6ENF22R0	M 22 OHM, 1/10W	1	
	R235	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R236	ARRCR2F1004T	METAL GLAZE FIXED RESISTOR	1	
	R251	ARRCR1F1503T	METAL GLAZE FIXED RESISTOR	1	
	R252	ARRCR1F1503T	METAL GLAZE FIXED RESISTOR	1	
	R253	ARRCR1F1503T	METAL GLAZE FIXED RESISTOR	1	
	R258	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R259	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R260	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R261	D0GB1R0JA057	CHIP RESISTOR	1	
	R262	ERJ6GEYG681	M 680 OHM,J,1/10W	1	
	R264	ERJ6ENF4702	M 47KOHM, 1/10W	1	
	R265	ERJ6ENF4702	M 47KOHM, 1/10W	1	
	R266	ERJ6ENF4702	M 47KOHM, 1/10W	1	
	R267	ERJ6ENF4702	M 47KOHM, 1/10W	1	
	R268	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
	R270	ERJ6ENF5492	M54.9KOHM, 1/10W	1	
	R271	ERJ6GEYJ2R7V	M 2.7 OHM,J,1/10W	1	
	R272	ERJ6GEYJ2R7V	M 2.7 OHM,J,1/10W	1	
	R273	ERJ6GEYJ2R7V	M 2.7 OHM,J,1/10W	1	
	R274	ERJ6GEYJ2R7V	M 2.7 OHM,J,1/10W	1	
	R275	ERJ6GEYJ2R7V	M 2.7 OHM,J,1/10W	1	
	R276	ERJ6GEYJ2R7V	M 2.7 OHM,J,1/10W	1	
	R277	ERJ6GEYJ2R7V	M 2.7 OHM,J,1/10W	1	
	R278	ERJ6GEYJ2R7V	M 2.7 OHM,J,1/10W	1	

Safety Ref. No.	Part No.	Part Name & Description	Pos	Remarks
R279	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	ERJ6GEYJ221V M 2 . 7 OHM, J,1/	1
R280	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	ERJ6GEYJ2100V M 10 OHM, J,1/TOW 1	1
R281	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	ERJ6GEYJ2100V M 10 OHM, J,1/TOW 1	1
R282	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	ERJ6GEYJ2100V M 10 OHM, J,1/TOW 1	1
R283	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	ERJ6GEYJ2100V M 10 OHM, J,1/TOW 1	1
R284	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	DOGB102J3A057 M 10 OHM, J,1/TOW 1	1
R285	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	DOGB102J3A057 M 1K OHM, J,1/TOW 1	1
R286	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	ERJ6GEYJ2102V M 2 . 2K OHM J,1/TOW 1	1
R287	ERJ6GEYJ2511 M 510 OHM, J,1/	10W	ERJ6ENF2612 M 26.1KOHM, J,1/TOW 1	1
R288	ERJ6GEYJ2R7V M 2 . 7 OHM, J,1/	10W	ERJ6ENF2612 M 26.1KOHM, J,1/TOW 1	1
R289	ERJ6ENF4992 M49 . 9KOHM, J,1/TOW 1	10W	ERJ6ENF2491 M 24.9KOHM, J,1/TOW 1	1
R290	ERJ6ENF4992 M49 . 9KOHM, J,1/TOW 1	10W	ERJ6ENF1102 M 11KOHM, J,1/TOW 1	1
R291	ERJ6ENF4992 M49 . 9KOHM, J,1/TOW 1	10W	ERJ12X2J473U M 47KOHM, J,1/TOW 1	1
R292	ERJ6ENF3921 M3 . 92KOHM, J,1/TOW 1	10W	ERJ6ENF3402 M 34KOHM, J,1/TOW 1	1
R293	ERJ6ENF3921 M3 . 92KOHM, J,1/TOW 1	10W	ERJ6ENF3402 M 22KOHM, J,1/TOW 1	1
R294	ERJ6ENF1002 M 10KOHM, J,1/TOW 1	10W	ERJ6ENF3301 M 3 . 3KOHM, J,1/TOW 1	1
R295	ERJ6GEYJ2683V M 68K OHM J,1/	10W	ERJ6ENF8200 M 820 OHM, J,1/TOW 1	1
R296	ERJ6GEYJ2683V M 68K OHM J,1/	10W	ERJ6ENF3301 M 3 . 3KOHM, J,1/TOW 1	1
R297	ERJ6GEYJ2683V M 68K OHM J,1/	10W	ERJ6ENF3402 M 34KOHM, J,1/TOW 1	1
R298	DOGB102J3A057 M 10KHM, J,1/TOW 1	10W	ERJ6ENF3402 M 22KOHM, J,1/TOW 1	1
R299	ARRCRLFB253T METAL GLAZE RESISTOR	10W	ARRCRLFB253T METAL GLAZE RESISTOR	1
R300	ARRCRLFB253T METAL GLAZE RESISTOR	10W	ARRCRLFB253T METAL GLAZE RESISTOR	1
R301	ARRCRLFB253T METAL GLAZE RESISTOR	10W	ARRCRLFB253T METAL GLAZE RESISTOR	1
R302	ARRCRLFB253T METAL GLAZE RESISTOR	10W	ARRCRLFB253T METAL GLAZE RESISTOR	1
R303	ARRCRLFB253T METAL GLAZE RESISTOR	10W	ARRCRLFB253T METAL GLAZE RESISTOR	1
R304	ARRCRLFB253T METAL GLAZE RESISTOR	10W	ARCR6JB25M METAL GLAZE RESISTOR	1
R305	ARCR6JB25M METAL GLAZE RESISTOR	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R306	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R307	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R308	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R309	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R310	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R311	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R312	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R313	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R314	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R315	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R316	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R317	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R318	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R319	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R320	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R321	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R322	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R323	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R324	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R325	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R326	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R327	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R328	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R329	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R330	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R331	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R332	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R333	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R334	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R335	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R336	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R337	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1
R338	ARRGEYJ221V M 220 OHM, J,1/	10W	ARRGEYJ221V M 220 OHM, J,1/	1

Safety Ref.	Part No.	Part Name & Description	Part No.	Part Name & Description	PCs	Remarks
R520	ERDS2FJ121	C 120 OHM, J,1/	4W	R638	DOGBL03JAA057	M 10K OHM J,1/
						Resists
R521	ERJ3GEEXJ223	M 22KOHM, J,1/16W	1	R639	ARRCR1F5363T	METAL GLAZE
						FIXED RESISTOR
R522	ERJ3GEEXJ180	M 18 OHM, J,1/10W	1	R640	ARRCR1F5363T	METAL GLAZE
						FIXED RESISTOR
R523	ERJ12VJ120	M 22KOHM, J,1/16W	1	R641	ARRCR1F5363T	METAL GLAZE
						FIXED RESISTOR
R524	ERJ3GEEXJ223	M 22KOHM, J,1/16W	1	R642	ERJ3GEEXJ473	M 47KOHM, J,1/10W
						1
R525	DOGBL03JAA057	M 10K OHM J,1/	1	R643	DOGBL03JAA057	M 47KOHM, J,1/10W
						1
R526	ERJ3GEEXJ472	M 47KOHM, J,1/	1	R644	ERJ6ENF3303	M 330KOHM, 1/10W
						1
R530	ERJ3GEEXJ471	M 47KOHM, J,1/	1	R645	ERJ6ENF334	M 330KOHM, 1/10W
						1
R531	ERJ6ENF3303	M 330KOHM, 1/10W	1	R646	ARRB5100J2C	5W 10 OHM
						1
R532	ERJ3GEEXJ472	M 4.7KOHM, J,1/10W	1	R647	ERJ6ENF334	M 330KOHM, 1/10W
						1
R533	DOGBL03JAA057	M 1KOHM, J,1/16W	1	R648	ERJ6ENF8062	M80. 6KOHM, 1/10W
						1
R534	ERDS2FJ102	M 1KOHM, J,1/10W	1	R649	ERJ6ENF8062	M80. 6KOHM, 1/10W
						1
R535	ERJ3KE102	M 1KOHM, J,1/10W	1	R650	ERJ6ENF8062	M80. 6KOHM, 1/10W
						1
R536	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R651	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R537	ERJ3KE1002	M 1KOHM, J,1/16W	1	R652	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R538	ERJ6EXG270	M 27 OHM, J,1/10W	1	R653	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R539	ARRCR1F5363T	METAL GLAZE		R654	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R540	ARRCR1F5363T	METAL GLAZE		R655	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R541	DOGBL03JAA057	M 10K OHM J,1/	1	R656	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R542	ERJ12VJ120	M 18 OHM, J,1/10W	1	R657	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R543	ERJ3GEEXJ180	M 18 OHM, J,1/10W	1	R658	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R544	ERJ3KE102	M 1KOHM, J,1/10W	1	R659	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R545	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R660	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R546	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R661	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R547	ERJ3KE102	M 1KOHM, J,1/10W	1	R662	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R548	ERJ6EXG270	M 27 OHM, J,1/10W	1	R663	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R549	ERJ6EXG270	M 27 OHM, J,1/10W	1	R664	ERJ6ENF3303	M 330KOHM, 1/10W
						1
R550	ERJ6ENF3303	M 330KOHM, 1/10W	1	R665	ERJ6ENF334	M 330KOHM, 1/10W
						1
R551	ERJ6ENF3303	M 330KOHM, 1/10W	1	R666	ARRB5100J2C	5W 10 OHM
						1
R552	ERJ3GEEXJ472	M 4.7KOHM, J,1/10W	1	R667	ERJ6ENF334	M 330KOHM, 1/10W
						1
R553	DOGBL03JAA057	M 1KOHM, J,1/16W	1	R668	ERJ6ENF8062	M80. 6KOHM, 1/10W
						1
R554	ERDS2FJ102	M 1KOHM, J,1/10W	1	R669	ERJ6ENF8062	M80. 6KOHM, 1/10W
						1
R555	ERJ3KE102	M 1KOHM, J,1/10W	1	R670	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R556	ERJ6EXG270	M 27 OHM, J,1/10W	1	R671	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R557	ERJ3KE1002	M 1KOHM, J,1/16W	1	R672	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R558	ERJ6EXG270	M 27 OHM, J,1/10W	1	R673	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R559	ERJ6EXG270	M 27 OHM, J,1/10W	1	R674	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R560	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R675	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R561	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R676	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R562	ERJ6EXG270	M 27 OHM, J,1/10W	1	R677	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R563	DOGBL03JAA057	M 1KOHM, J,1/16W	1	R678	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R564	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R679	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R565	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R680	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R566	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R681	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R567	ERJ6EXG270	M 27 OHM, J,1/10W	1	R682	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R568	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R683	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R569	ERJ6EXG270	M 27 OHM, J,1/10W	1	R684	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R570	DOGBL03JAA057	M 47KOHM, J,1/10W	1	R685	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R571	ERJ6EXG270	M 27 OHM, J,1/10W	1	R686	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R572	ERJ6EXG270	M 27 OHM, J,1/10W	1	R687	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R573	ERJ3GEEXJ332	M 47KOHM, J,1/16W	1	R688	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R574	ERJ3GEEXJ332	M 47KOHM, J,1/16W	1	R689	ERJ6EXG270	M 27 OHM, J,1/10W
						1
R575	ERJ3GEEXJ474	M 47KOHM, J,2W	1	R690	ERJ3GEEXJ474	M 100KOHM, J,1/
						1
R576	ERJ3KE2701	M 27KOHM, J,1/16W	1	R691	ERJ3GEEXJ474	M 100KOHM, J,1/
						1
R577	ERJ3KE2701	M 33KOHM, J,1/10W	1	R692	ERJ3KE2701	M 100KOHM, J,1/
						1
R578	ERJ3KE2701	M 100KOHM, J,1/10W	1	R693	ERJ3KE2701	M 100KOHM, J,1/
						1
R579	ERJ3KE2701	M 100KOHM, J,1/10W	1	R694	ERJ3KE2701	M 100KOHM, J,1/
						1
R580	ERJ3KE2701	M 100KOHM, J,1/10W	1	R695	ERJ3KE2701	M 100KOHM, J,1/
						1
R581	ERJ3KE2701	M 100KOHM, J,1/10W	1	R696	ERJ3KE2701	M 100KOHM, J,1/
						1
R582	ERJ3KE2701	M 100KOHM, J,1/10W	1	R697	ERJ3KE2701	M 100KOHM, J,1/
						1
R583	ERJ3KE2701	M 100KOHM, J,1/10W	1	R698	ERJ3KE2701	M 100KOHM, J,1/
						1
R584	ERJ3KE2701	M 100KOHM, J,1/10W	1	R699	ERJ3KE2701	M 100KOHM, J,1/
						1
R585	ERJ3KE2701	M 100KOHM, J,1/10W	1	R700	ERJ3KE2701	M 100KOHM, J,1/
						1
R586	ERJ3KE2701	M 100KOHM, J,1/10W	1	R701	ERJ3KE2701	M 100KOHM, J,1/
						1
R587	ERJ3KE2701	M 100KOHM, J,1/10W	1	R702	ERJ3KE2701	M 100KOHM, J,1/
						1
R588	ERJ3KE2701	M 100KOHM, J,1/10W	1	R703	ERJ3KE2701	M 100KOHM, J,1/
						1
R589	ERJ3KE2701	M 100KOHM, J,1/10W	1	R704	ERJ3KE2701	M 100KOHM, J,1/
						1
R590	ERJ3KE2701	M 100KOHM, J,1/10W	1	R705	ERJ3KE2701	M 100KOHM, J,1/
						1
R591	ERJ3KE2701	M 100KOHM, J,1/10W	1	R706	ERJ3KE2701	M 100KOHM, J,1/
						1
R592	ERJ3KE2701	M 100KOHM, J,1/10W	1	R707	ERJ3KE2701	M 100KOHM, J,1/
						1
R593	ERJ3KE2701	M 100KOHM, J,1/10W	1	R708	ERJ3KE2701	M 100KOHM, J,1/
						1
R594	ERJ3KE2701	M 100KOHM, J,1/10W	1	R709	ERJ3KE2701	M 100KOHM, J,1/
						1
R595	ERJ3KE2701	M 100KOHM, J,1/10W	1	R710	ERJ3KE2701	M 100KOHM, J,1/
						1
R596	ERJ3KE2701	M 100KOHM, J,1/10W	1	R711	ERJ3KE2701	M 100KOHM, J,1/
						1
R597	ERJ3KE2701	M 100KOHM, J,1/10W	1	R712	ERJ3KE2701	M 100KOHM, J,1/
						1
R598	ERJ3KE2701	M 100KOHM, J,1/10W	1	R713	ERJ3KE2701	M 100KOHM, J,1/
						1
R599	ERJ3KE2701	M 100KOHM, J,1/10W	1	R714	ERJ3KE2701	M 100KOHM, J,1/
						1
R600	ERJ3KE2701	M 100KOHM, J,1/10W	1	R715	ERJ3KE2701	M 100KOHM, J,1/
						1
R601	ARRCR5J24M	METAL GLAZE		R716	ERJ3KE2701	M 100KOHM, J,1/
						1
R602	ERG2S516H1	M 50 OHM, J,2W	1	R717	ERJ3KE2701	M 100KOHM, J,1/
						1
R603	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R718	ERJ3KE2701	M 100KOHM, J,1/
						1
R604	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R719	ERJ3KE2701	M 100KOHM, J,1/
						1
R605	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R720	ERJ3KE2701	M 100KOHM, J,1/
						1
R606	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R721	ERJ3KE2701	M 100KOHM, J,1/
						1
R607	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R722	ERJ3KE2701	M 100KOHM, J,1/
						1
R608	ERJ6ENF8062	M80. 6KOHM, 1/10W	1	R723	ERJ3KE2701	M 100KOHM, J,1/
						1
R609	ERJ3KE2701	M 100KOHM, J,1/10W	1	R724	ERJ3KE2701	M 100KOHM, J,1/
						1
R610	ERJ3GEEXJ100	M 10 OHM, J,1/16W	1	R725	DOGBL123JAA057	M 1.5KOHM J,1/
						1
R611	ERJ3GE					

Safety Ref.	Part No.	Part Name & Description	Pos	Remarks
R745	ERJ3GEYJ101	M 100 OHM, 1/2W	1	
R746	ERJ3GEYJ101	M 100 OHM, 1/2W	1	
R747	D0GBB102JAA057	M 1KOHM, 1/16W	1	
R748	D0GBB103JAA057	M 10K OHM, 1/16W	1	
R749	ERJ3GEYJ221	M 220 OHM, 1/2W	1	
R750	ERJ3GEYJ221	M 220 OHM, 1/2W	1	
R751	D0GBB102JAA057	M 1KOHM, 1/16W	1	
R752	ERJ3GEYJ101	M 1 OHM, 1/10W	1	
R753	ERJ3GEYJ101	M 1 OHM, 1/10W	1	
R754	HUASMC100JZP	Thermal Cut-off WITH RESISTOR	1	
R755	RF601	HUASMC100JZP W 20 OHM, 1/5W	1	
R756	T201	ETB42BJL6GAD TRANSFORMER	1	
R757	T301	ETB35BC28GAD TRANSFORMER	1	
R758	T501	ETB29AK1L8AD TRANSFORMER	1	
R759	VR251	EVMESA01B15 VARIABLE RESIS-T	1	
R760	VR351	EVMESA01B54 VARIABLE RESIS-T	1	
R761	△ Z601	ERZVGEED751 VARISTOR	1	
R762	△ Z602	ERZVAGAD471 VARISTOR	1	
R763	ZD353	MA4120NM ZENER DIODE	1	
R764	ZD354	MA2406NMF ZENER DIODE	1	
R765	ZD501	MA4300NMTA ZENER DIODE	1	
R766	ZD502	MA4300NMTA ZENER DIODE	1	
R767	ZD503	MA4300NMTA ZENER DIODE	1	
R768	ZD504	MA4150NMTA ZENER DIODE	1	
R769	ZD505	MA4300NMTA ZENER DIODE	1	
R770	ZD506	MA4220NM ZENER DIODE	1	
R771	ZD507	MA4082NM ZENER DIODE	1	
R772	ZD508	MA4150NMTA ZENER DIODE	1	
R773	ZD509	MA4062NM ZENER DIODE	1	
R774	ZD510	MA4030NM ZENER DIODE	1	
R775	ZD511	MA4150NMTA ZENER DIODE	1	
R776	ZD512	MA4200NM ZENER DIODE	1	
R777	ZD513	MA4082NM ZENER DIODE	1	
R778	ZD514	MA4120NM ZENER DIODE	1	
R779	ZD515	MA4062NM ZENER DIODE	1	
R780	ZD516	MA4030NM ZENER DIODE	1	
R781	ZD517	MA4150NMTA ZENER DIODE	1	
R782	ZD518	MA4200NM ZENER DIODE	1	
R783	ZD519	MA4082NM ZENER DIODE	1	
R784	ZD520	MA4120NM ZENER DIODE	1	
R785	ZD521	MA4062NM ZENER DIODE	1	
R786	ZD522	MA4030NM ZENER DIODE	1	
R787	ZD523	MA4150NMTA ZENER DIODE	1	
R788	ZD524	MA4200NM ZENER DIODE	1	
R789	ZD525	MA4082NM ZENER DIODE	1	
R790	ZD526	MA4120NM ZENER DIODE	1	
R791	ZD527	MA4062NM ZENER DIODE	1	
R792	ZD528	MA4030NM ZENER DIODE	1	
R793	ZD529	MA4150NMTA ZENER DIODE	1	
R794	ZD530	MA4200NM ZENER DIODE	1	
R795	ZD531	MA4082NM ZENER DIODE	1	
R796	ZD532	MA4120NM ZENER DIODE	1	
R797	ZD533	MA4062NM ZENER DIODE	1	
R798	ZD534	MA2406NMF ZENER DIODE	1	
R799	ZD535	MA4102NM ZENER DIODE	1	
R800	ZD536	MA4030NM ZENER DIODE	1	
R801	ZD537	MA4150NMTA ZENER DIODE	1	
R802	ZD538	MA4200NM ZENER DIODE	1	
R803	ZD539	MA4082NM ZENER DIODE	1	
R804	ZD540	MA4120NM ZENER DIODE	1	
R805	ZD541	MA4062NM ZENER DIODE	1	
R806	ZD542	MA4030NM ZENER DIODE	1	
R807	ZD543	MA4150NMTA ZENER DIODE	1	
R808	ZD544	MA4200NM ZENER DIODE	1	
R809	ZD545	MA4082NM ZENER DIODE	1	
R810	ZD546	MA4120NM ZENER DIODE	1	
R811	ZD547	MA4062NM ZENER DIODE	1	
R812	ZD548	MA4030NM ZENER DIODE	1	
R813	ZD549	MA4150NMTA ZENER DIODE	1	
R814	ZD550	MA4200NM ZENER DIODE	1	
R815	ZD551	MA4082NM ZENER DIODE	1	
R816	ZD552	MA4120NM ZENER DIODE	1	
R817	ZD553	MA4062NM ZENER DIODE	1	
R818	ZD554	MA2406NMF ZENER DIODE	1	
R819	ZD555	MA4102NM ZENER DIODE	1	
R820	ZD556	MA4030NM ZENER DIODE	1	
R821	ZD557	MA4150NMTA ZENER DIODE	1	
R822	ZD558	MA4200NM ZENER DIODE	1	
R823	ZD559	MA4082NM ZENER DIODE	1	
R824	ZD560	MA4120NM ZENER DIODE	1	
R825	ZD561	MA4062NM ZENER DIODE	1	
R826	ZD562	MA4030NM ZENER DIODE	1	
R827	ZD563	MA4150NMTA ZENER DIODE	1	
R828	ZD564	MA4200NM ZENER DIODE	1	
R829	ZD565	MA4082NM ZENER DIODE	1	
R830	ZD566	MA4120NM ZENER DIODE	1	
R831	ZD567	MA4062NM ZENER DIODE	1	
R832	ZD568	MA4030NM ZENER DIODE	1	
R833	ZD569	MA4150NMTA ZENER DIODE	1	
R834	ZD570	MA4200NM ZENER DIODE	1	
R835	ZD571	MA4082NM ZENER DIODE	1	
R836	ZD572	MA4120NM ZENER DIODE	1	
R837	ZD573	MA4062NM ZENER DIODE	1	
R838	ZD574	MA4030NM ZENER DIODE	1	
R839	ZD575	MA4150NMTA ZENER DIODE	1	
R840	ZD576	MA4200NM ZENER DIODE	1	
R841	ZD577	MA4082NM ZENER DIODE	1	
R842	ZD578	MA4120NM ZENER DIODE	1	
R843	ZD579	MA4062NM ZENER DIODE	1	
R844	ZD580	MA4030NM ZENER DIODE	1	
R845	ZD581	MA4150NMTA ZENER DIODE	1	
R846	ZD582	MA4200NM ZENER DIODE	1	
R847	ZD583	MA4082NM ZENER DIODE	1	
R848	ZD584	MA4120NM ZENER DIODE	1	
R849	ZD585	MA4062NM ZENER DIODE	1	
R850	ZD586	MA4030NM ZENER DIODE	1	
R851	ZD587	MA4150NMTA ZENER DIODE	1	
R852	ZD588	MA4200NM ZENER DIODE	1	
R853	ZD589	MA4082NM ZENER DIODE	1	
R854	ZD590	MA4120NM ZENER DIODE	1	
R855	ZD591	MA4062NM ZENER DIODE	1	
R856	ZD592	MA4030NM ZENER DIODE	1	
R857	ZD593	MA4150NMTA ZENER DIODE	1	
R858	ZD594	MA4200NM ZENER DIODE	1	
R859	ZD595	MA4082NM ZENER DIODE	1	
R860	ZD596	MA4120NM ZENER DIODE	1	
R861	ZD597	MA4062NM ZENER DIODE	1	
R862	ZD598	MA4030NM ZENER DIODE	1	
R863	ZD599	MA4150NMTA ZENER DIODE	1	
R864	ZD599	MA4200NM ZENER DIODE	1	
R865	ZD600	MA4082NM ZENER DIODE	1	
R866	ZD601	MA4120NM ZENER DIODE	1	
R867	ZD602	MA4062NM ZENER DIODE	1	
R868	ZD603	MA4030NM ZENER DIODE	1	
R869	ZD604	MA4150NMTA ZENER DIODE	1	
R870	ZD605	MA4200NM ZENER DIODE	1	
R871	ZD606	MA4082NM ZENER DIODE	1	
R872	ZD607	MA4120NM ZENER DIODE	1	
R873	ZD608	MA4062NM ZENER DIODE	1	
R874	ZD609	MA4030NM ZENER DIODE	1	
R875	ZD610	MA4150NMTA ZENER DIODE	1	
R876	ZD611	MA4200NM ZENER DIODE	1	
R877	ZD612	MA4082NM ZENER DIODE	1	
R878	ZD613	MA4120NM ZENER DIODE	1	
R879	ZD614	MA4062NM ZENER DIODE	1	
R880	ZD615	MA4030NM ZENER DIODE	1	
R881	ZD616	MA4150NMTA ZENER DIODE	1	
R882	ZD617	MA4200NM ZENER DIODE	1	
R883	ZD618	MA4082NM ZENER DIODE	1	
R884	ZD619	MA4120NM ZENER DIODE	1	
R885	ZD620	MA4062NM ZENER DIODE	1	
R886	ZD621	MA4030NM ZENER DIODE	1	
R887	ZD622	MA4150NMTA ZENER DIODE	1	
R888	ZD623	MA4200NM ZENER DIODE	1	
R889	ZD624	MA4082NM ZENER DIODE	1	
R890	ZD625	MA4120NM ZENER DIODE	1	
R891	ZD626	MA4062NM ZENER DIODE	1	
R892	ZD627	MA4030NM ZENER DIODE	1	
R893	ZD628	MA4150NMTA ZENER DIODE	1	
R894	ZD629	MA4200NM ZENER DIODE	1	
R895	ZD630	MA4082NM ZENER DIODE	1	
R896	ZD631	MA4120NM ZENER DIODE	1	
R897	ZD632	MA4062NM ZENER DIODE	1	
R898	ZD633	MA4030NM ZENER DIODE	1	
R899	ZD634	MA4150NMTA ZENER DIODE	1	
R900	ZD635	MA4200NM ZENER DIODE	1	
R901	ZD636	MA4082NM ZENER DIODE	1	
R902	ZD637	MA4120NM ZENER DIODE	1	
R903	ZD638	MA4062NM ZENER DIODE	1	
R904	ZD639	MA4030NM ZENER DIODE	1	
R905	ZD640	MA4150NMTA ZENER DIODE	1	
R906	ZD641	MA4200NM ZENER DIODE	1	
R907	ZD642	MA4082NM ZENER DIODE	1	
R908	ZD643	MA4120NM ZENER DIODE	1	
R909	ZD644	MA4062NM ZENER DIODE	1	
R910	ZD645	MA4030NM ZENER DIODE	1	
R911	ZD646	MA4150NMTA ZENER DIODE	1	
R912	ZD647	MA4200NM ZENER DIODE	1	
R913	ZD648	MA4082NM ZENER DIODE	1	
R914	ZD649	MA4120NM ZENER DIODE	1	
R915	ZD650	MA4062NM ZENER DIODE	1	
R916	ZD651	MA4030NM ZENER DIODE	1	
R917	ZD652	MA4150NMTA ZENER DIODE	1	
R918	ZD653	MA4200NM ZENER DIODE	1	
R919	ZD654	MA4082NM ZENER DIODE	1	
R920	ZD655	MA4120NM ZENER DIODE	1	
R921	ZD656	MA4062NM ZENER DIODE	1	
R922	ZD657	MA4030NM ZENER DIODE	1	
R923	ZD658	MA4150NMTA ZENER DIODE	1	
R924	ZD659	MA4200NM ZENER DIODE	1	
R925	ZD660	MA4082NM ZENER DIODE	1	
R926	ZD661	MA4120NM ZENER DIODE	1	
R927	ZD662	MA4062NM ZENER DIODE	1	
R928	ZD663	MA4030NM ZENER DIODE	1	
R929	ZD664	MA4150NMTA ZENER DIODE	1	
R930	ZD665	MA4200NM ZENER DIODE	1	
R931	ZD666	MA4082NM ZENER DIODE	1	
R932	ZD667	MA4120NM ZENER DIODE	1	
R933	ZD668	MA4062NM ZENER DIODE	1	
R934	ZD669	MA4030NM ZENER DIODE	1	
R935	ZD670	MA4150NMTA ZENER DIODE	1	
R936	ZD671	MA4200NM ZENER DIODE	1	
R937	ZD672	MA4082NM ZENER DIODE	1	
R938	ZD673	MA4120NM ZENER DIODE	1	
R939	ZD674	MA4062NM ZENER DIODE	1	
R940	ZD675	MA4030NM ZENER DIODE	1	
R941	ZD676	MA4150NMTA ZENER DIODE	1	
R942	ZD677	MA4200NM ZENER DIODE	1	
R943	ZD678	MA4082NM ZENER DIODE	1	
R944	ZD679	MA4120NM ZENER DIODE	1	
R945	ZD680	MA4062NM ZENER DIODE	1	
R946	ZD681	MA4030NM ZENER DIODE	1	
R947	ZD682	MA4150NMTA ZENER DIODE	1	
R948	ZD683	MA4200NM ZENER DIODE	1	
R949	ZD684	MA4082NM ZENER DIODE	1	
R950	ZD685	MA4120NM ZENER DIODE	1	
R951	ZD686	MA4062NM ZENER DIODE	1	
R952	ZD687	MA4030NM ZENER DIODE	1	
R953	ZD688	MA4150NMTA ZENER DIODE	1	
R954	ZD689	MA4200NM ZENER DIODE	1	
R955	ZD690	MA4082NM ZENER DIODE	1	
R956	ZD691	MA4120NM ZENER DIODE	1	
R957	ZD692	MA4062NM ZENER DIODE	1	
R958	ZD693	MA4030NM ZENER DIODE	1	
R959	ZD694	MA4150NMTA ZENER DIODE	1	
R960	ZD695	MA4200NM ZENER DIODE	1	
R961	ZD696	MA4082NM ZENER DIODE	1	
R962	ZD697	MA4120NM ZENER DIODE	1	
R963	ZD698	MA4062NM ZENER DIODE	1	
R964	ZD699	MA4030NM ZENER DIODE	1	
R965	ZD700	MA4150NMTA ZENER DIODE	1	
R966	ZD701	MA4200NM ZENER DIODE	1	
R967	ZD702	MA4082NM ZENER DIODE		